



0496




0496-0-15-XX-23-XX-10-0
Press-fit in 2,69 mounting hole

0368




0368-0-33-XX-13-XX-10-0
#16A Crimp Barrel

8067




8067-0-19-XX-13-XX-10-0
Wire Termination

1105

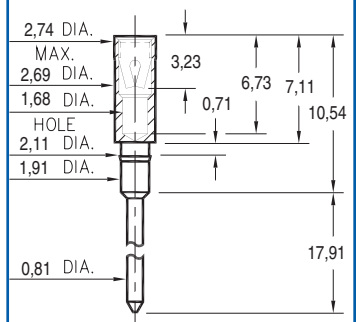


1105-0-15-XX-13-XX-04-0
Press-fit in 2,03 mounting hole

8730

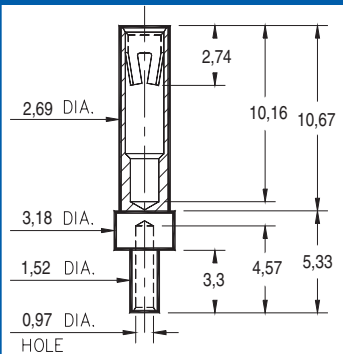


8730-0-19-XX-23-XX-10-0
Wire Termination

3667

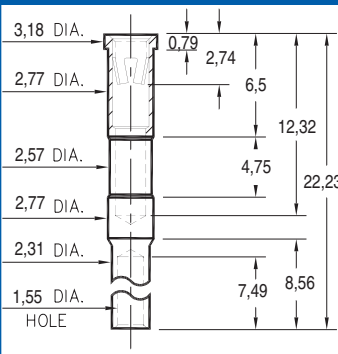


3667-0-19-XX-23-XX-10-0
Wire Termination

9372




9372-0-15-XX-23-XX-10-0
Solder mount in 2,59 min. mounting hole

4582

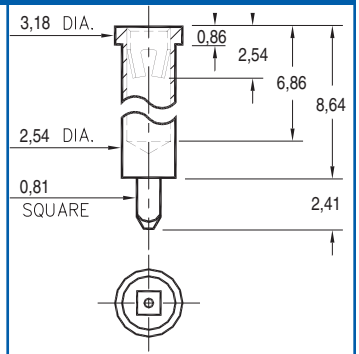


4582-0-15-XX-23-XX-10-0
Square press-fit in 1,02 plated thru hole

5834




5834-0-15-XX-23-XX-10-0
Press-fit in 2,72 mounting hole

9401




9401-0-15-XX-23-XX-10-0
Solder mount in 2,59 min. mounting hole
Also available on 24mm wide carrier tape: 1,100 parts per 330mm reel.
Order as: 9401-0-57-XX-23-XX-10-0

9801



9801-0-15-XX-23-XX-10-0
Solder mount in 2,59 min. mounting hole
Also available on 16mm wide carrier tape: 1,200 parts per 330mm reel.
Order as: 9801-0-57-XX-23-XX-10-0

8829

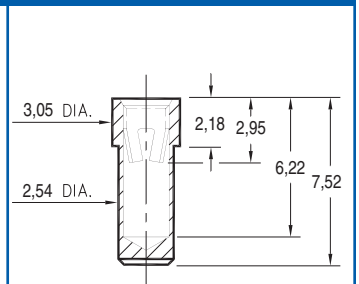

8829-0-15-XX-23-XX-10-0
Solder mount in 2,59 min. mounting hole

SPECIFICATIONS

SHELL MATERIAL:
Brass Alloy 360, 1/2 Hard

CONTACT MATERIAL:
Beryllium Copper Alloy 172, HT

PART MANUFACTURED IN INCHES, METRIC FOR REF ONLY

TOLERANCES ON:
LENGTHS: ± 0,13
DIAMETERS: ± 0,05
ANGLES: ± 2°

ORDER CODE: XXXX - X - XX - XX - X3 - XX - XX - 0

BASIC PART #

SPECIFY SHELL FINISH:
01 5,08µm TIN/LEAD OVER NICKEL
80 5,08µm TIN OVER NICKEL
15 0,25µm GOLD OVER NICKEL



SPECIFY CONTACT FINISH:
01 5,08µm TIN/LEAD OVER NICKEL
80 5,08µm TIN OVER NICKEL
27 0,76µm GOLD OVER NICKEL

SELECT CONTACT

#13 or #23 CONTACT (DATA ON PAGE 214)