



MT..KB SERIES

THREE PHASE BRIDGE

Power Modules

Features

- Package fully compatible with the industry standard INT-A-pak power modules series
- High thermal conductivity package, electrically insulated case
- Outstanding number of power encapsulated components
- Excellent power volume ratio, outline for easy connections to power transistor and IGBT modules
- 4000 V_{RMS} isolating voltage
- UL E78996 approved 

90 A
110 A

Description

A range of extremely compact, encapsulated three phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and heavy duty applications.

Major Ratings and Characteristics

Parameters	90MT.KB	110MT.KB	Units
I_O	90 (120)	110 (150)	A
@ T_C	90 (61)	90 (57)	°C
I_{FSM} @ 50Hz	770	950	A
@ 60Hz	810	1000	A
I^2t @ 50Hz	3000	4500	A ² s
@ 60Hz	2700	4100	A ² s
$I^2\sqrt{t}$	30000	45000	A ² √s
V_{RRM} range	800 to 1600		V
T_{STG} range	- 40 to 150		°C
T_J range	- 40 to 150		°C

90-110MT..KB Series

Bulletin I27501 rev. A 05/03

International
TOR Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak rev. voltage V	I_{RRM} max. @ T_J max. mA
90-110MT..KB	80	800	900	10
	100	1000	1100	
	120	1200	1300	
	140	1400	1500	
	160	1600	1700	

Forward Conduction

Parameter		90MT.KB	110MT.KB	Units	Conditions			
I _O	Maximum DC output current @ Case temperature	90 (120)	110 (150)	A	120° Rect conduction angle			
		90 (61)	90 (57)	°C				
I _{FSM}	Maximum peak, one-cycle forward, non-repetitive surge current	770	950	A	t = 10ms	No voltage	Initial T _J = T _J max.	
		810	1000		t = 8.3ms	reapplied		
		650	800		t = 10ms	100% V _{RRM}		
		680	840		t = 8.3ms	reapplied		
I ² t	Maximum I ² t for fusing	3000	4500	A ² s	t = 10ms	No voltage		
		2700	4100		t = 8.3ms	reapplied		
		2100	3200		t = 10ms	100% V _{RRM}		
		1900	2900		t = 8.3ms	reapplied		
I ² /t	Maximum I ² /t for fusing	30000	45000	A ² /s	t = 0.1 to 10ms, no voltage reapplied			
V _{F(TO)1}	Low level value of threshold voltage	0.89	0.81	V	(16.7% × π × I _{F(AV)}) < I < π × I _{F(AV)} , @ T _J max.			
V _{F(TO)2}	High level value of threshold voltage	1.05	0.99		(I > π × I _{F(AV)}), @ T _J max.			
r _{f1}	Low level value of forward slope resistance	5.11	4.37	mΩ	(16.7% × π × I _{F(AV)}) < I < π × I _{F(AV)} , @ T _J max.			
r _{f2}	High level value of forward slope resistance	4.64	4.64		(I > π × I _{F(AV)}), @ T _J max.			
V _{FM}	Maximum forward voltage drop	1.6	1.4	V	I _{pk} = 150A, T _J = 25°C, t _p = 400μs single junction			
V _{INS}	RMS isolation voltage	4000	4000	V	T _J = 25°C, all terminal shorted f = 50Hz, t = 1s			

Thermal and Mechanical Specifications

Parameter	90MT.KB	110MT.KB	Units	Conditions
T_J Max. junction operating temperature range	-40 to 150		°C	
T_{stg} Max. storage temperature range	-40 to 150		°C	
R_{thJC} Max. thermal resistance, junction to case	0.21 1.26 0.25 1.47	0.18 1.07 0.21 1.25	K/W	DC operation per module DC operation per junction 120° Rect conduction angle per module 120° Rect conduction angle per junction
R_{thCS} Max. thermal resistance, case to heatsink	0.03		K/W	Per module Mounting surface smooth, flat and greased
T Mounting torque ± 10% to heatsink to terminal	4 to 6 3 to 4		Nm	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound. Lubricated threads.
wt Approximate weight	176		g	


Ordering Information Table

Device Code

11	0	MT	160	K	B
1	2	3	4	5	

- 1** - Current rating code: 9 = 90 A (Avg)
11 = 110 A (Avg)
- 2** - Three phase diodes bridge
- 3** - Essential part number
- 4** - Voltage code: Code x 10 = V_{RRM} (See Voltage Ratings Table)
- 5** - Generation II

Outline Table (without optional barriers)

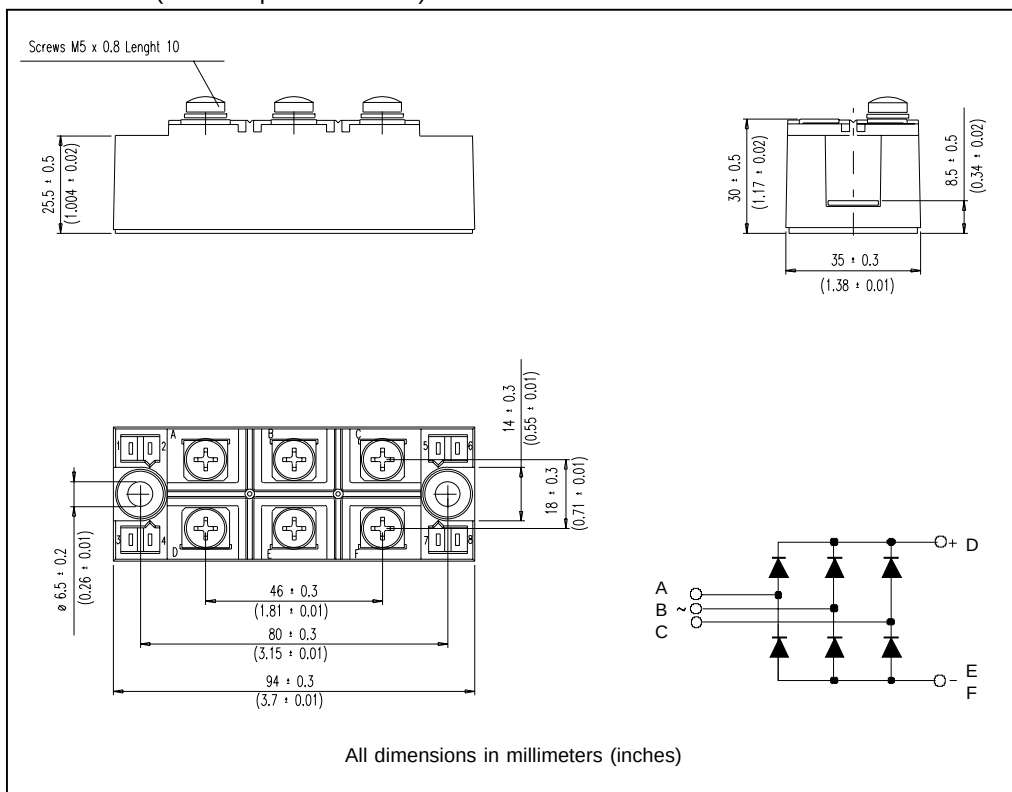

NOTE: To order the Optional Hardware see Bulletin I27900

90-110MT..KB Series

Bulletin I27501 rev. A 05/03

Outline Table (with optional barriers)

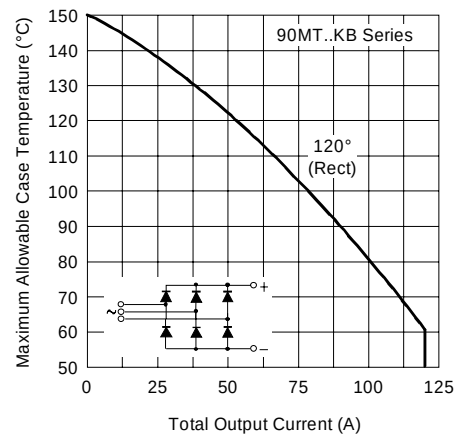
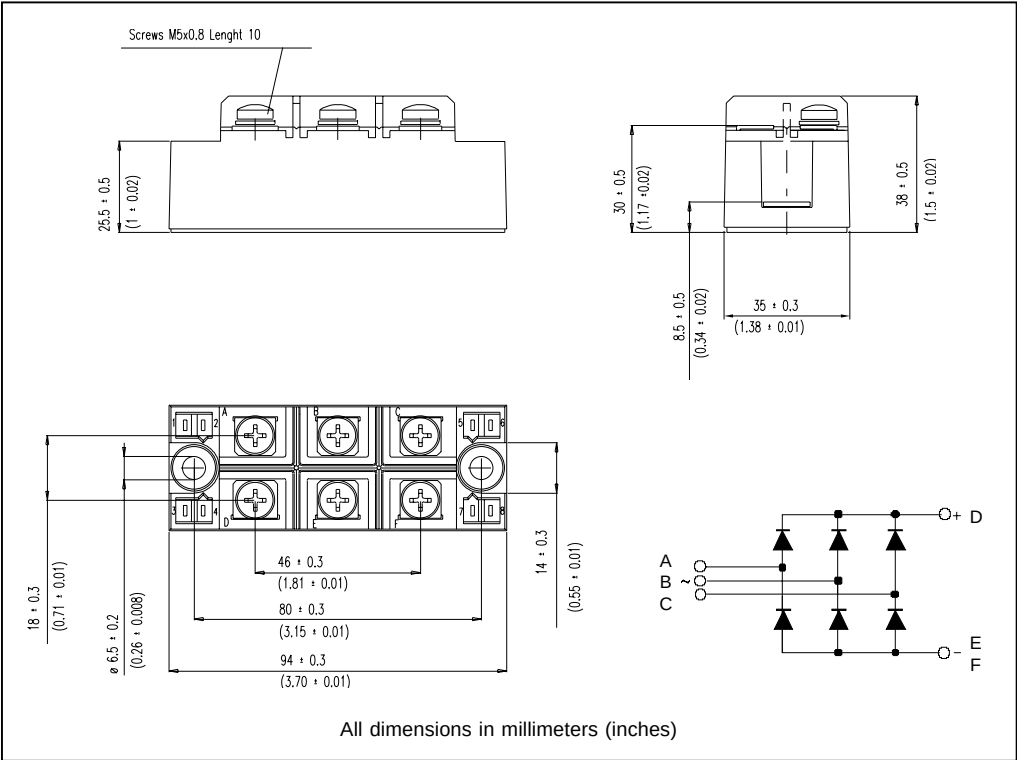


Fig. 1 - Current Ratings Characteristics

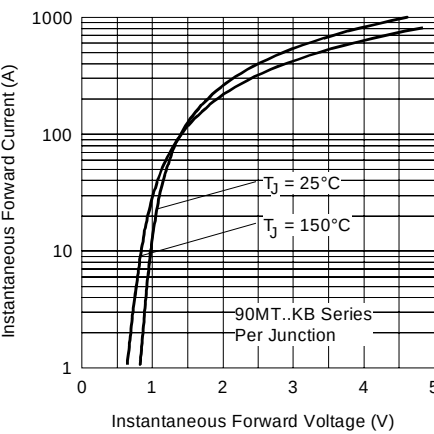


Fig. 2 - Forward Voltage Drop Characteristics

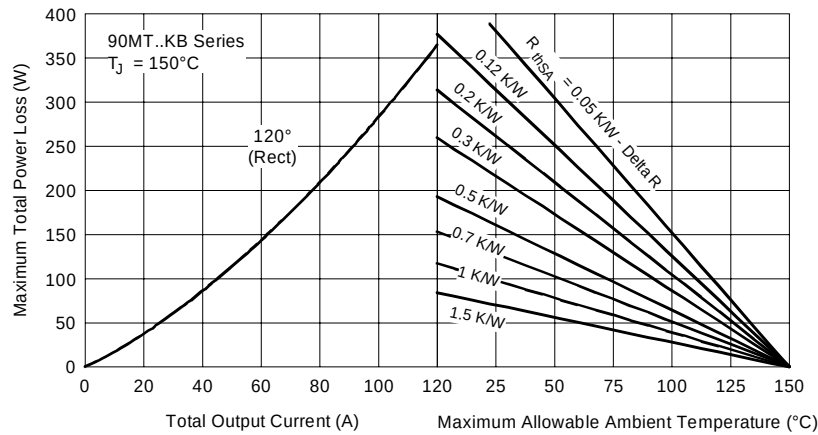


Fig. 3 - Total Power Loss Characteristics

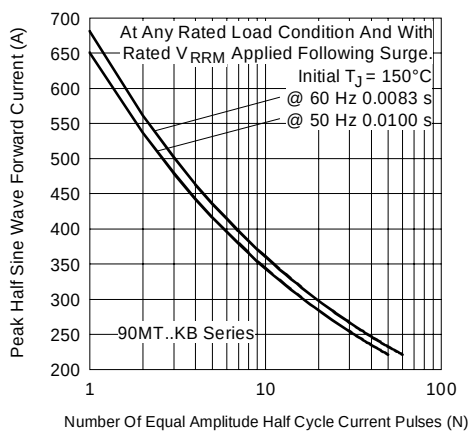


Fig. 4 - Maximum Non-Repetitive Surge Current

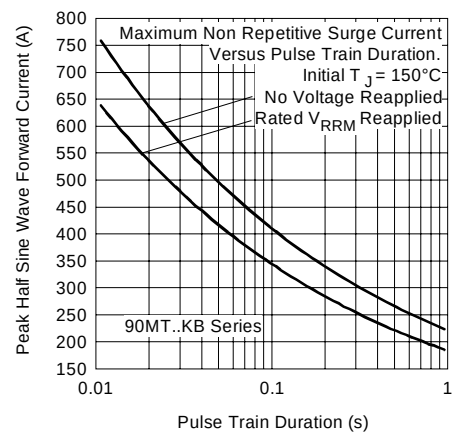


Fig. 5 - Maximum Non-Repetitive Surge Current

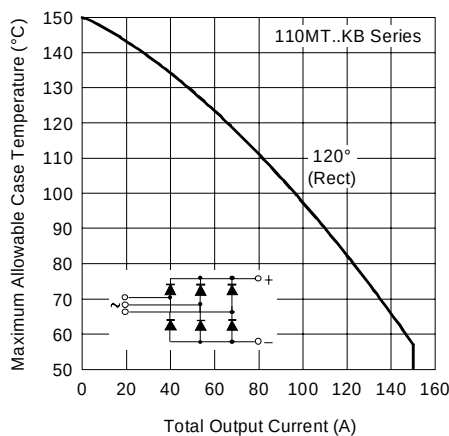


Fig. 6 - Current Ratings Characteristics

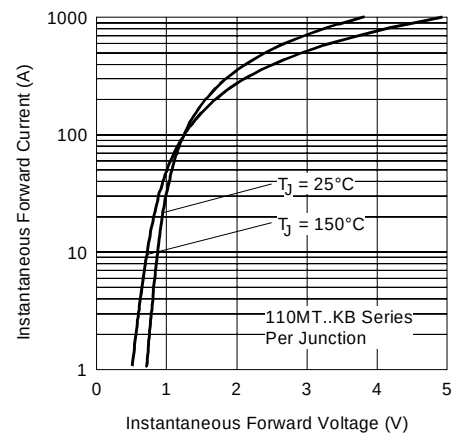


Fig. 7 - Forward Voltage Drop Characteristics

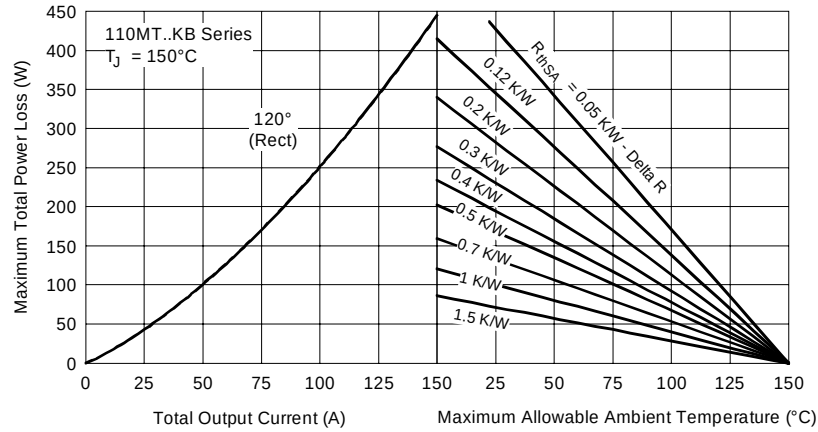


Fig. 8 - Total Power Loss Characteristics

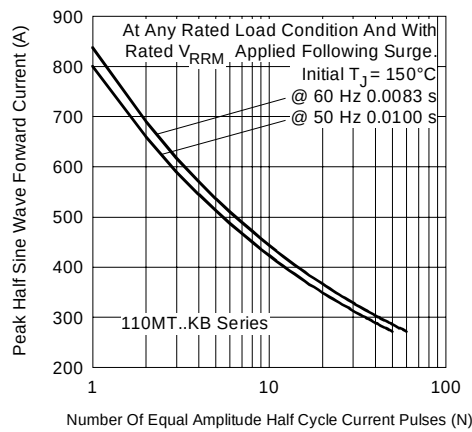


Fig. 9 - Maximum Non-Repetitive Surge Current

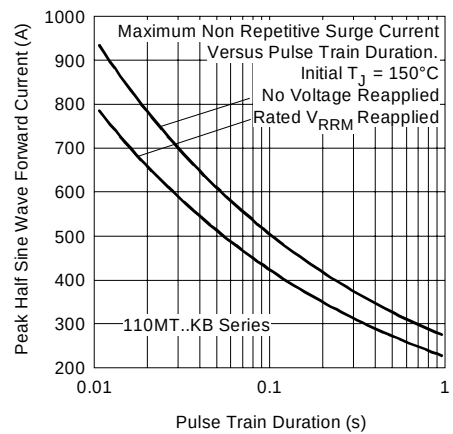


Fig. 10 - Maximum Non-Repetitive Surge Current

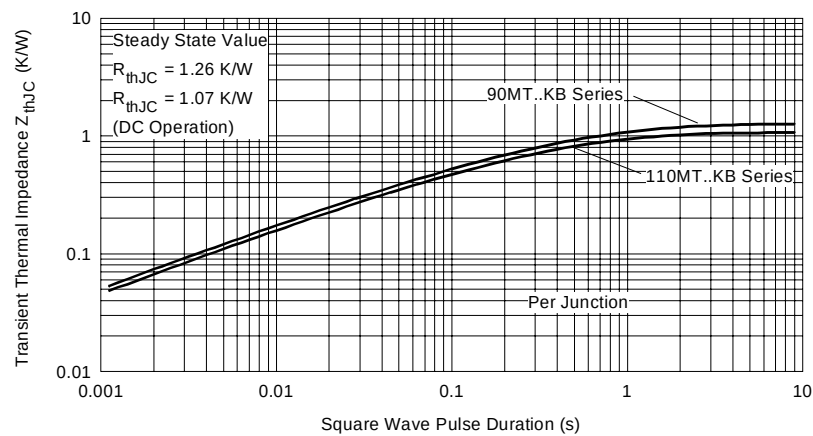


Fig. 11 - Thermal Impedance Z_{thJC} Characteristic

Data and specifications subject to change without notice.
This product has been designed and qualified for Industrial Level.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7309
05/03



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.