
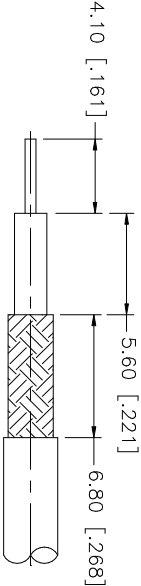
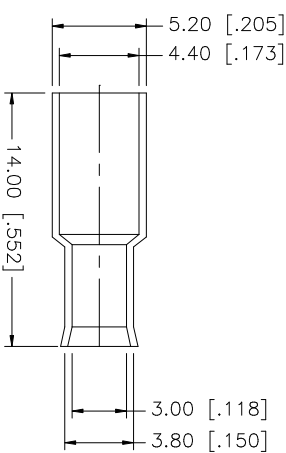


REV.	DATE	DESCRIPTION
A	01/04/04	UPDATE DRAWING FORMAT

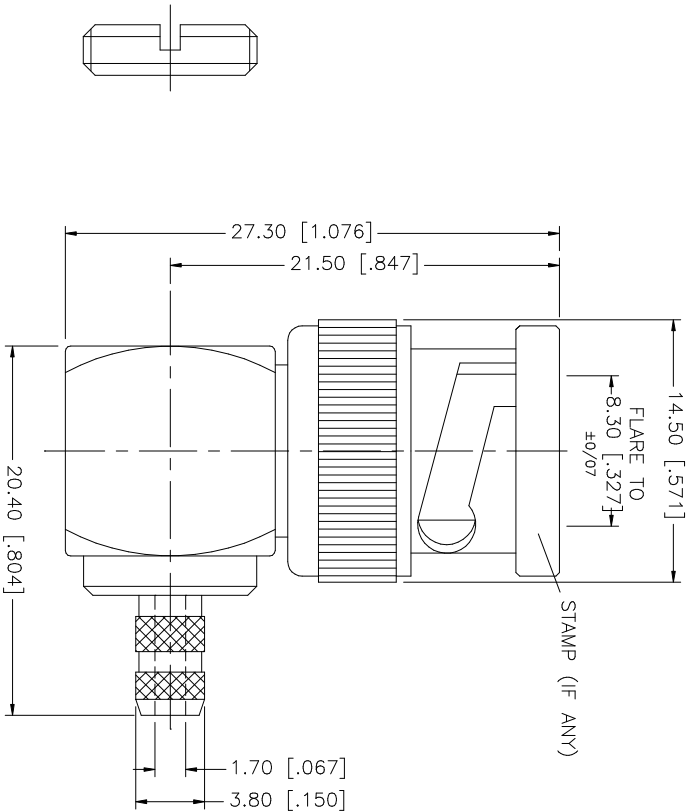

RECOMMENDED
CABLE STRIPPING DIM'S

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
 2. CONTACT PIN TO SOLDER

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	PART DESCRIPTION
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN	G.R.S.	01/04/04
6					0.5 - 8mm ± 0.20mm	CHECKED		
5	NUT	BRASS	NICKEL	1	8 - 30mm ± 0.40mm	ISSUED		
4	FERRULE	COPPER	NICKEL	1	30 - 120mm ± 0.50mm	SHEET	1 OF 1	
3	CONTACT PIN	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	PART NO.		
2	INSULATOR	DELIN	NATURAL	1	.020 - .315 = ± 0.007"			
1	BODY	BRASS	NICKEL	1	.315 - 1.180 = ± 0.015"			
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/112/112178.DWG	DWG. NO.
								112178.DWG
						REV.	A	SIZE
								A
								SCALE
								NA

Amphenol Connex

BNC R/A CRIMP PLUG - 75ohm
(FOR RG-174/U, 188A/U, 316/U CABLE)

112178