



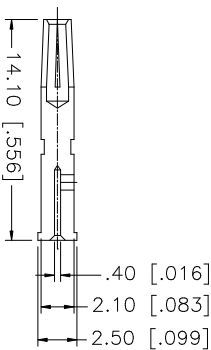




DESCRIPTION		
REV.	DATE	
A	08/27/98	REDIMENSION DRAWING
B	06/19/00	MODIFY BODY MATERIAL TO BRASS
C	04/04/03	INITIAL RELEASE

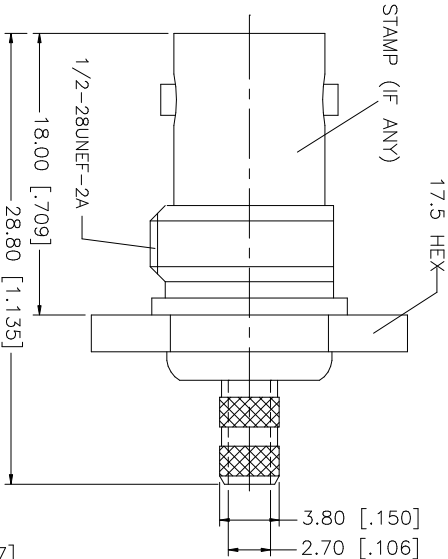

RECOMMENDED
CABLE STRIPPING DIM'S

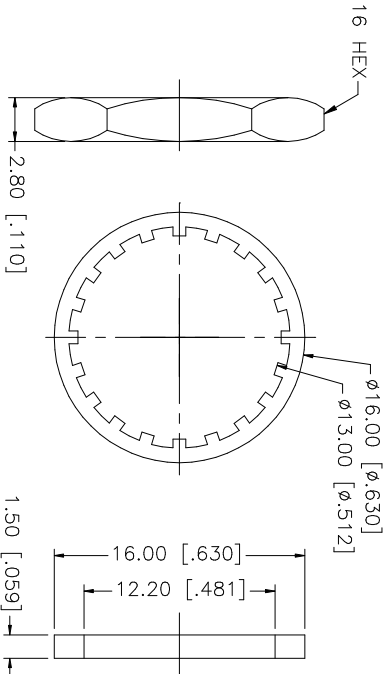

RECOMMENDED
MOUNTING HOLE

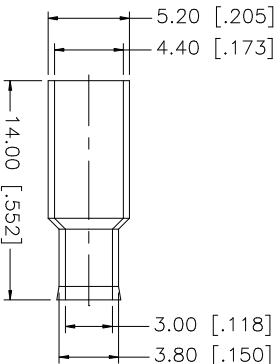

- CRIMP NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

9	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS	DATE	PART DESCRIPTION		
8	SLEEVE	DELIRIN	NATURAL	1						
7	CONTACT PIN	PHOS. BRONZE	GOLD	1						
6	HEX NUT	BRASS	NICKEL	1						
5	LOCK WASHER	BRASS	NICKEL	1						
4	GASKET	RUBBER	NICKEL	1						
3	BARREL	BRASS	NICKEL	1						
2	INSULATOR	DELIRIN	NATURAL	1						
1	HOUSING/BODY	BRASS	NICKEL	1						
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	DWG. NO.	REV.	SIZE	SCALE
						C:/112/112235.DWG	112235.DWG	C	A	NA

Amphenol Connex

BNC BULKHEAD CRIMP JACK
(FOR RG-179/U, 187A/U CABLE)

112235

Amphenol Connex