
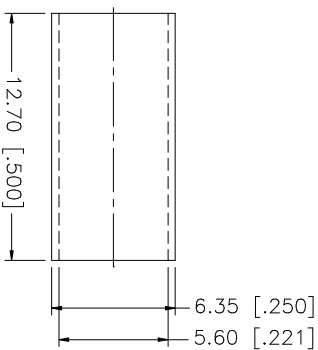
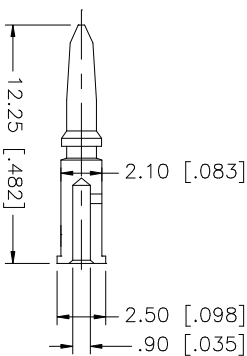
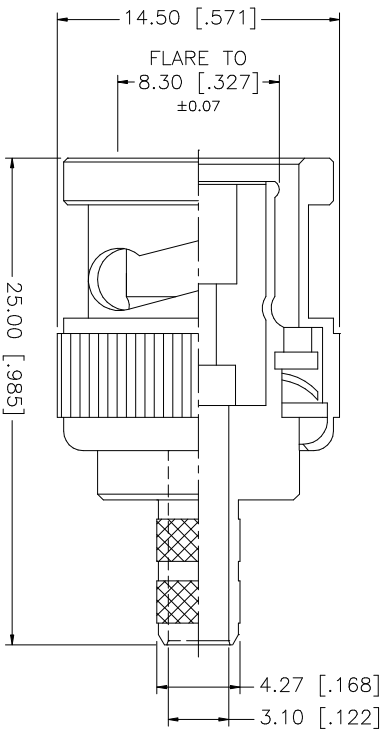


REV.	DATE	DESCRIPTION
A	04/05/03	UPDATE DRAWING FORMAT

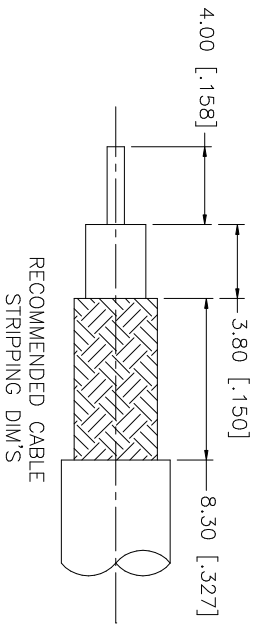

NOTE:

- 1.CRIMPED FERRULE
HEX CRIMP SIZE .213"
- 2.CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

8					UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE			
7						DRAWN	G.R.S.	04/05/03		
6	FERRULE	COPPER	NICKEL	1		CHECKED				
5	GASKET	RUBBER	RED	1		ISSUED				
4	CONTACT PIN	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	SHEET	1 OF 1			
3	INSULATOR	DELIRIN	NATURAL	1						
2	BODY	BRASS	NICKEL	1						
1	SHELL	ZINC DIE CAST	NICKEL	1						
DESCRIPTION				MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING			
						CAD FILE C:/112/112514.DWG	DWG. NO. 112514.DWG	REV. A	SIZE A	SCALE NA

Amphenol Connex

PART DESCRIPTION

BNC CRIMP PLUG
(FOR RG-55/U, 142A/U, 223/U, 400/U)

PART NO.
112514