




REVISIONS		DATE	DWG. NO.	SH	REV.
ZONE	LTR	DESCRIPTION	APPROVED		A

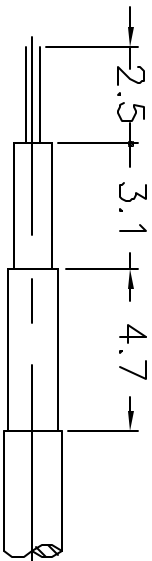

RECOMMENDED
CABLE STRIPPING DIM'S

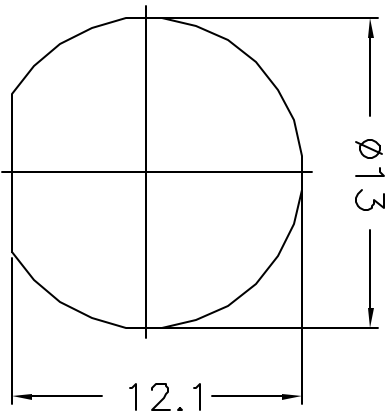

RECOMMENDED
MOUNTING HOLE

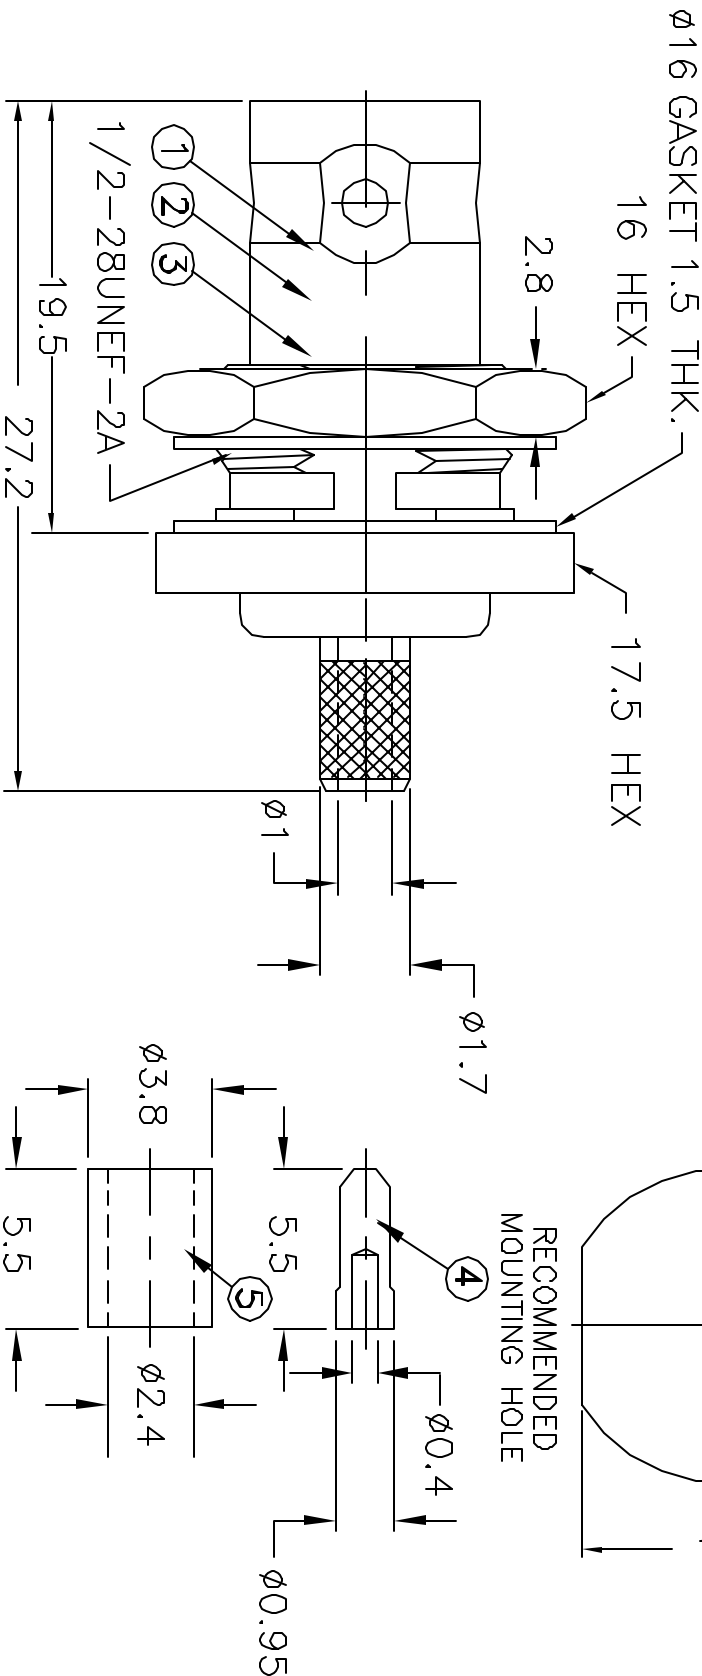

DESCRIPTION	MATERIAL	FINISH	QTY.	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		APPROVALS	DATE	TITLE			SCALE	PART NO.	SHEET	OF
1 BODY	BRASS	NICKEL	1	0.5-8 = ± 0.2 8-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	DRAWN B. BURTON 4/10/95 CHECKED ISSUED			connex Connector Corporation BNC BULKHEAD GRIMP JACK (FOR RG-178B/U, 196A/U CABLE)			SIZE A FCIM NO. 99001 DWG. NO. 112522.DWG		112522	1 OF 1
2 INSULATOR	DELRIIN	NATURAL	1											
3 CONTACT PIN	PHOS.BRONZE	GOLD	1											
4 CONTACT PIN	BRASS	GOLD	1											
5 FERRULE	COPPER	NICKEL	1											
								DO NOT SCALE DRAWING						