


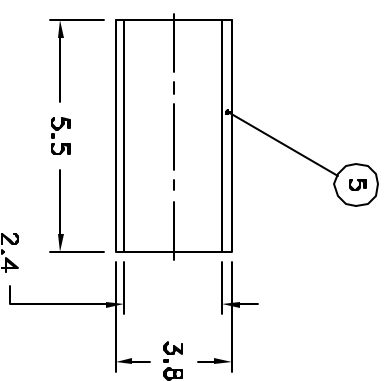


REVISIONS		DWG. NO.	SH	REV.
ZONE	LTR	DESCRIPTION	DATE	APPROVED

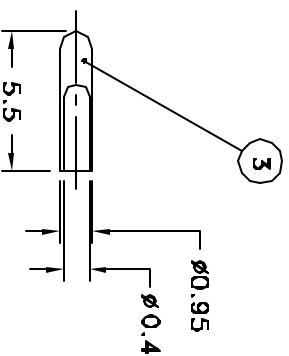

RECOMMENDED
CABLE STRIPPING DIM'S

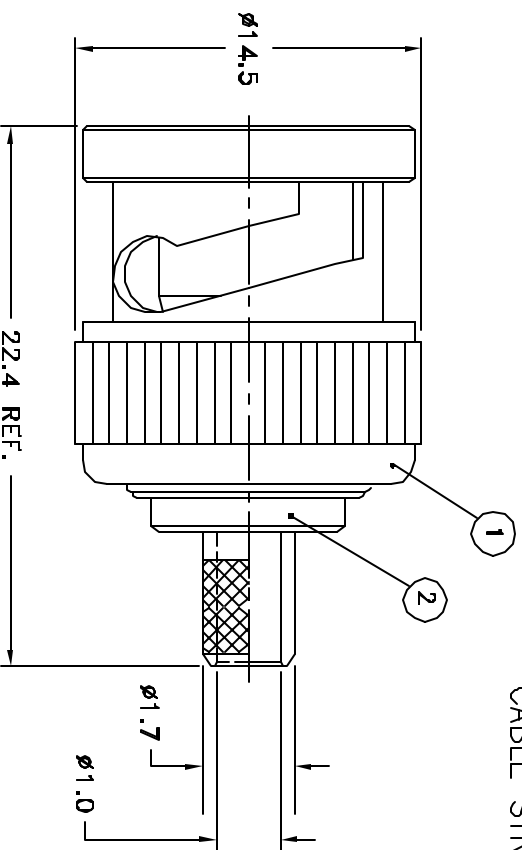

DESCRIPTION	MATERIAL	FINISH	QTY	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:		APPROVALS	DATE	 BNC CRIMP PLUG RG 178 & 196/U					
1 SHELL	DIECAST	NICKEL	1	0.5-8 = ± 0.2	DRAWN	B. BURTON	12/1/95						
2 BODY	BRASS	NICKEL	1	8-30 = ± 0.4	CHECKED								
3 CONTACT PIN	PHOS. BRONZE	GOLD	1	30-120 = ± 0.6	ISSUED								
4 INSULATOR	DELIRIN	NATURAL	1	120-315 = ± 1									
5 FERRULE	BRASS	GOLD	1	315-1000 = ± 1.6 1000-2000 = ± 2.4									
				DO NOT SCALE DRAWING									
				SCALE 3.5:1	PART NO.	112516	SHEET 1	OF 1				REV.	