



REV.	DATE	DESCRIPTION
NC	05/22/03	INITIAL RELEASE
A	05/18/05	CORRECT PART NO. AND DESCRIPTION
B	10/24/06	ADD "75ohm" TO DESCRIPTION

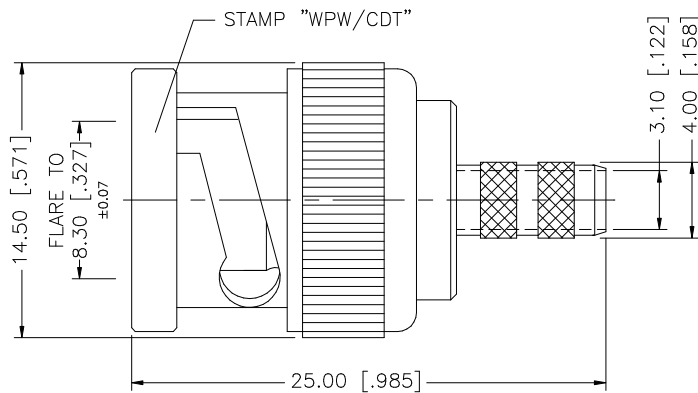

CRIMP NOTES:

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.								10/24/06
7						CHECKED			PART DESCRIPTION BNC CRIMP PLUG – 75ohm (FOR B573945, MINI MAX 500 CABLE)						
6	FERRULE	COPPER	NICKEL	1		ISSUED									
5	SLEEVE	DELTRIN	NATURAL	1	SHEET	1 OF 1		PART NO. 112556							
4	GASKET	RUBBER	RED	1											
3	INSULATOR	DELTRIN	NATURAL	1	CAD FILE	C:/112/112556.DWG		DWG. NO.	112556.DWG	REV.	B	SIZE	A	SCALE	NA
2	CONTACT PIN	BRASS	GOLD	1	DO NOT SCALE DRAWING										
1	SHELL/BODY	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											