

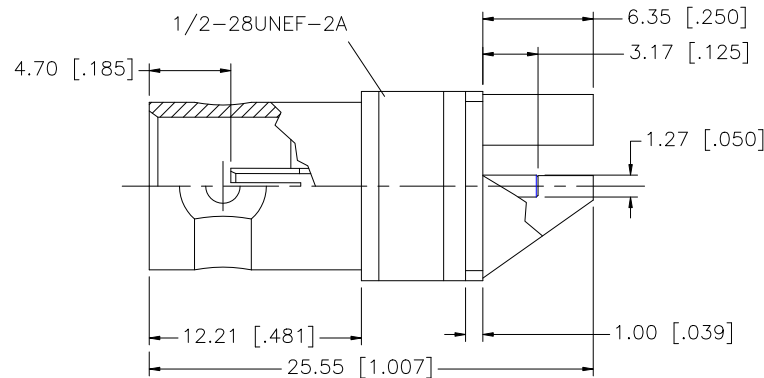


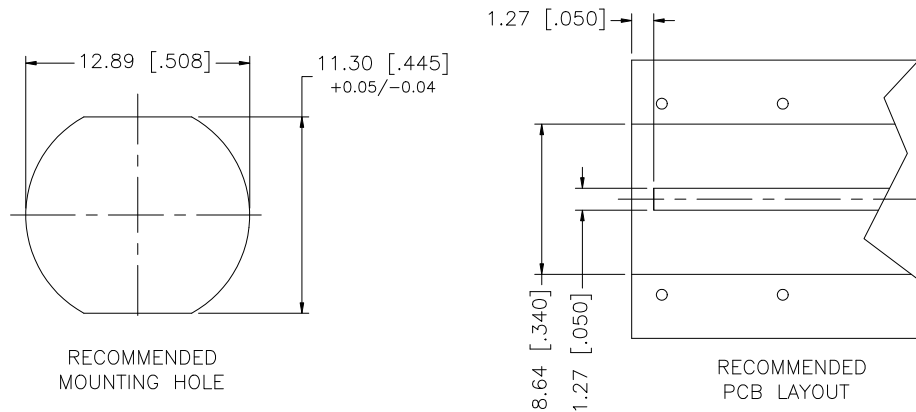

REV.	DATE	ECR NO.	DESCRIPTION
NC	08/21/07	-	INITIAL RELEASE
A	10/30/07	-	REVISE SLOT DIMENSION TO 1.65mm ①
B	11/25/07	-	REVISE SLOT DIMENSION TO 1.75mm [.069] ①
C	03/16/08	-	REVISE CONTACT PIN DIAMETER TO 1.27mm [.050]
D	04/21/08	-	REMOVE LOCK WASHER AND HEX NUT FROM BOM, BODY PLATING TO GOLD

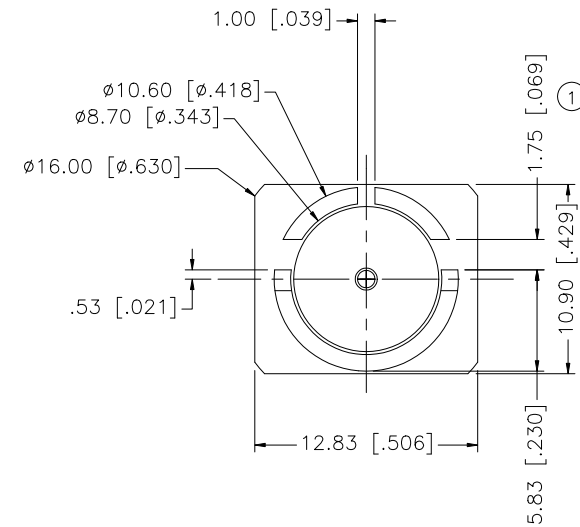

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
7						DRAWN	G.R.S.	04/21/08										
6						CHECKED												
5						ISSUED				PART DESCRIPTION								
4						SHEET	1 OF 1				BNC 75 OHMS STRAIGHT BULKHEAD JACK							
3	CONTACT PIN	PHOS. BRONZE	GOLD	1		CAD FILE					PART NO.							
2	INSULATOR	TEFLON	NATURAL	1		C:/112/112740.DWG					112740							
1	BODY	BRASS	GOLD	1														
DESCRIPTION						DWG. NO.					112740.DWG		REV.	D	SIZE	A	SCALE	NA