





- Low profile DIP socket, sits only 3,1mm above the PCB.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 208 for details.
- Series 115 use MM #0501 pins. See page 131 for details.
- Insulators are high temperature thermoplastic.

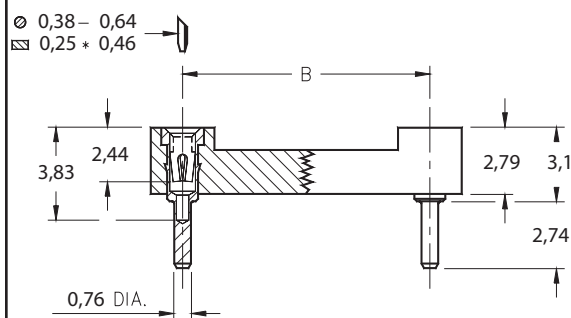

Total number of pins				Quantity per tube	Ordering Information			
	A	B	C					
10	12,6	5,08	7,6	41	115-XX-210-41-001000			
4	5,0	7,62	10,1	102	115-XX-304-41-001000			
6	7,6	7,62	10,1	67	115-XX-306-41-001000			
8	10,1	7,62	10,1	50	115-XX-308-41-001000			
10	12,6	7,62	10,1	40	115-XX-310-41-001000			
14	17,7	7,62	10,1	28	115-XX-314-41-001000			
16	20,3	7,62	10,1	25	115-XX-316-41-001000			
18	22,8	7,62	10,1	22	115-XX-318-41-001000			
20	25,3	7,62	10,1	20	115-XX-320-41-001000			
22	27,8	7,62	10,1	18	115-XX-322-41-001000			
24	30,4	7,62	10,1	16	115-XX-324-41-001000			
28	35,5	7,62	10,1	14	115-XX-328-41-001000			
20	25,4	10,16	12,7	20	115-XX-420-41-001000			
22	27,8	10,16	12,7	18	115-XX-422-41-001000			
24	30,4	10,16	12,7	16	115-XX-424-41-001000			
28	35,5	10,16	12,7	14	115-XX-428-41-001000			
32	40,6	10,16	12,7	12	115-XX-432-41-001000			
24	30,5	15,24	17,7	16	115-XX-624-41-001000			
28	35,5	15,24	17,7	14	115-XX-628-41-001000			
32	40,6	15,24	17,7	12	115-XX-632-41-001000			
36	45,7	15,24	17,7	11	115-XX-636-41-001000			
40	50,8	15,24	17,7	10	115-XX-640-41-001000			
42	53,3	15,24	17,7	9	115-XX-642-41-001000			
48	60,9	15,24	17,7	8	115-XX-648-41-001000			
50	63,5	15,24	17,7	8	115-XX-650-41-001000			
52	66,0	15,24	17,7	7	115-XX-652-41-001000			
50	63,5	22,86	25,3	8	115-XX-950-41-001000			
52	66,0	22,86	25,3	7	115-XX-952-41-001000			
64	81,2	22,86	25,3	6	115-XX-964-41-001000			

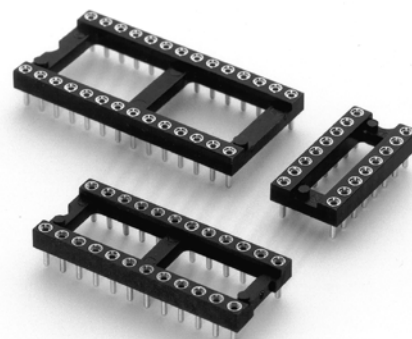

XX= Plating Code
See Below

For RoHS compliance
select ◇ plating code.

SPECIFY PLATING CODE XX=				93			43 ◇	
Sleeve (Pin)				5,08µm Sn/Pb			5,08µm Sn	
Contact (Clip)				0,76µm Au			0,76µm Au	