

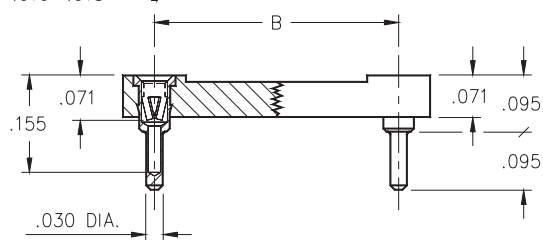


$\varnothing$.015-.022
 $\square$.010*.018

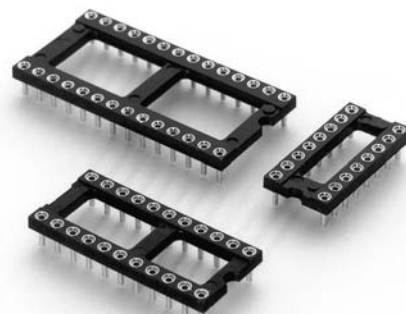

- Our lowest profile DIP socket with an above PCB height of only .095".
- Special short Hi-Rel, 4-finger BeCu #12 contact is rated at 3 amps. See page 207 for details.
- Series 115 use MM #1534 pins. See page 130 for details.
- Insulators are high temperature thermoplastic.



Total number of pins				Quantity per tube	Ordering Information	
	A	B	C			
6	0.3	0.3	0.4	68	115-XX-306-41-003000	
8	0.4	0.3	0.4	50	115-XX-308-41-003000	
14	0.7	0.3	0.4	28	115-XX-314-41-003000	
16	0.8	0.3	0.4	25	115-XX-316-41-003000	
18	0.9	0.3	0.4	22	115-XX-318-41-003000	
20	1.0	0.3	0.4	20	115-XX-320-41-003000	
22	1.1	0.3	0.4	18	115-XX-322-41-003000	
24	1.2	0.3	0.4	16	115-XX-324-41-003000	
28	1.4	0.3	0.4	14	115-XX-328-41-003000	
20	1.0	0.4	0.5	20	115-XX-420-41-003000	
22	1.1	0.4	0.5	18	115-XX-422-41-003000	
24	1.2	0.4	0.5	16	115-XX-424-41-003000	
28	1.4	0.4	0.5	14	115-XX-428-41-003000	
24	1.2	0.6	0.7	16	115-XX-624-41-003000	
28	1.4	0.6	0.7	14	115-XX-628-41-003000	
32	1.6	0.6	0.7	12	115-XX-632-41-003000	
36	1.8	0.6	0.7	11	115-XX-636-41-003000	
40	2.0	0.6	0.7	10	115-XX-640-41-003000	
48	2.4	0.6	0.7	8	115-XX-648-41-003000	
50	2.5	0.6	0.7	8	115-XX-650-41-003000	
XX= Plating Code See Below					For RoHS compliance select  plating code.	

SPECIFY PLATING CODE XX=			93			43	44
Sleeve (Pin)			200 μ " Sn/Pb			200 μ " Sn	200 μ " Sn
Contact (Clip)			30 μ " Au			30 μ " Au	200 μ " Sn