

HONEYWELL
PART NUMBER


11SM701-T

PRODUCT CODE

TWY2000

REV	DOCUMENT	CHANGED BY	CHECK
8	0038442	SSK 31MAR08	BLR

PLASTIC PLUNGER

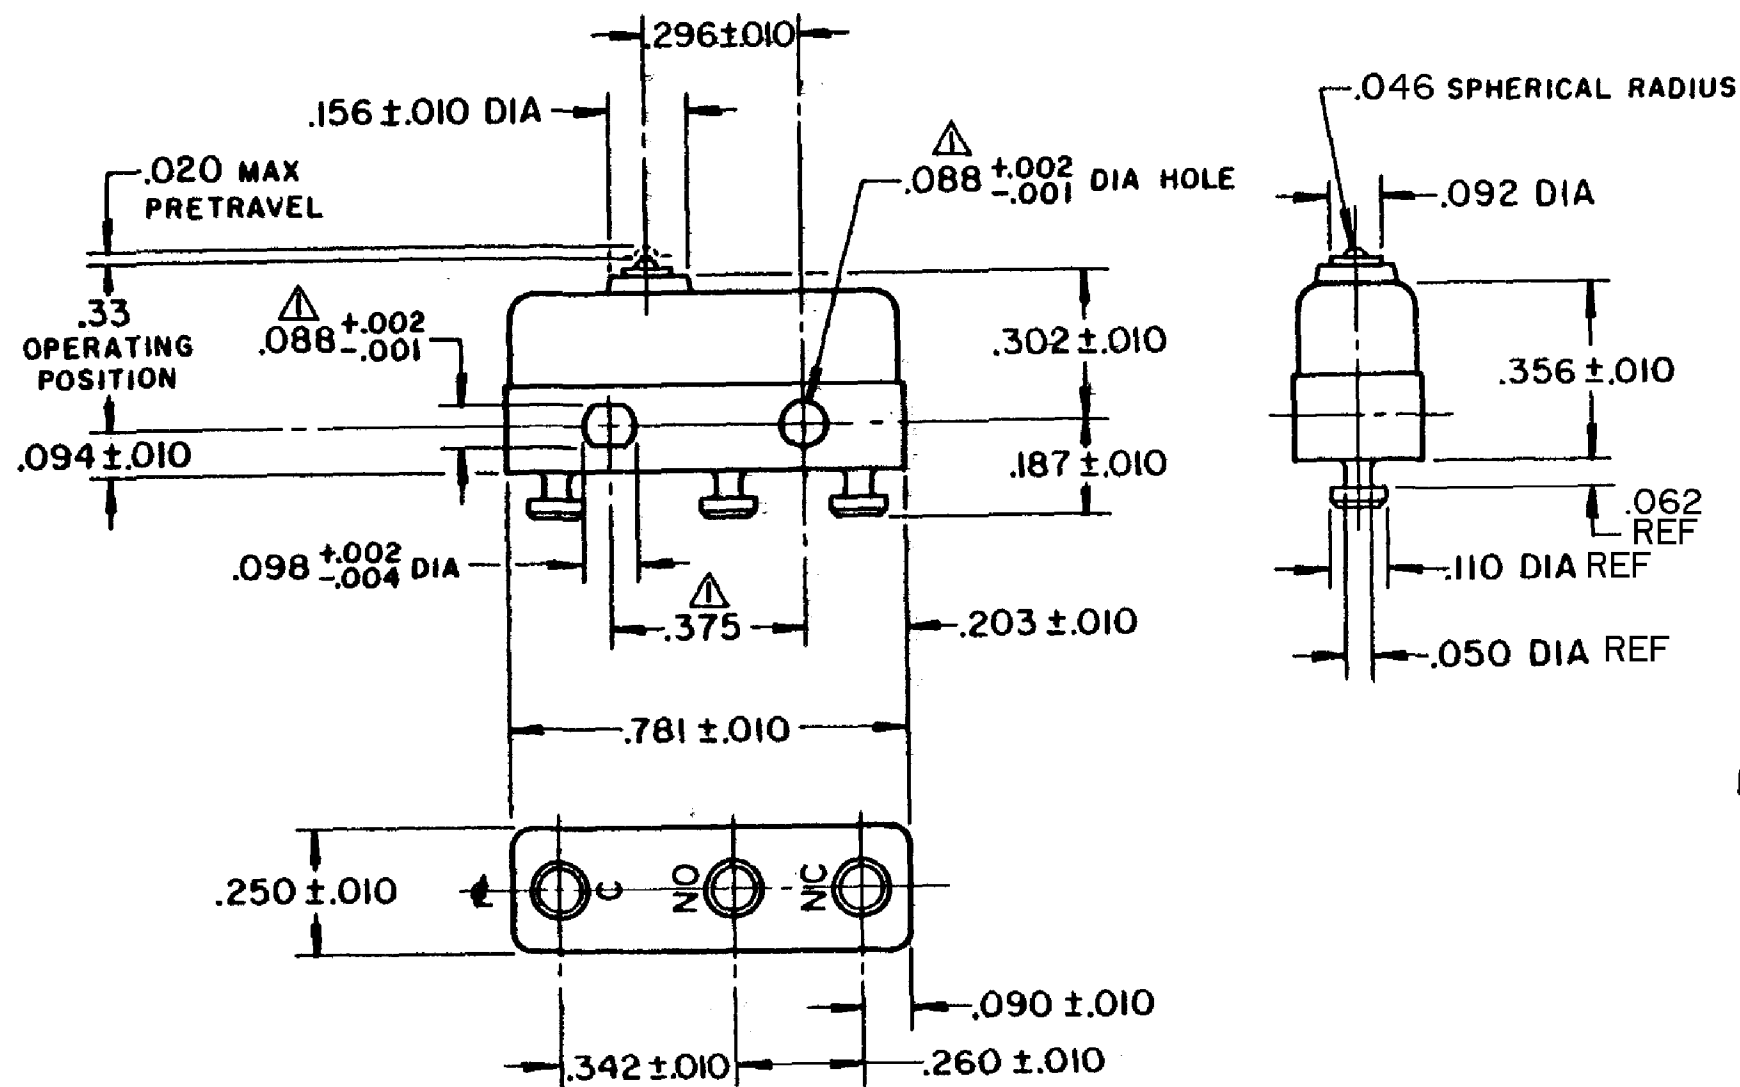

NOTE -

△-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .375 ±.002 CENTERS
2-TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO.
PR - 275REPLACES
X38169 - SM

CHARACTERISTICS

OPERATING FORCE -- 56 GRAM MAX

RELEASE FORCE-- -- 14 GRAM MIN

DIFFERENTIAL TRAVEL-- -- .002 MAX

OVERTRAVEL-- -- -- .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS	UL, CSA	4A, 250 VAC	UL	CS	BRAND	L119
-----------	---------	-------------	----	----	-------	------

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

THIRD ANGLE PROJECTION



DRAWN

VK

06 FEB 08

CHECK

RJ

06 FEB 08

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE

B

TYPE

I

DRAWING NAME

11SM701-T

REV

8

SCALE

-

WEIGHT .006 LB MAX

SHEET 1 OF 1