
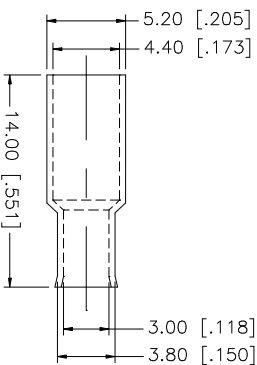


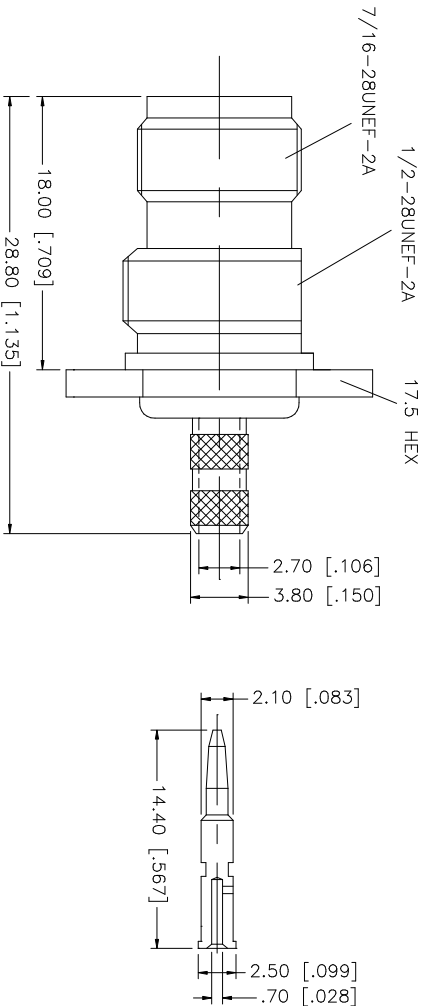
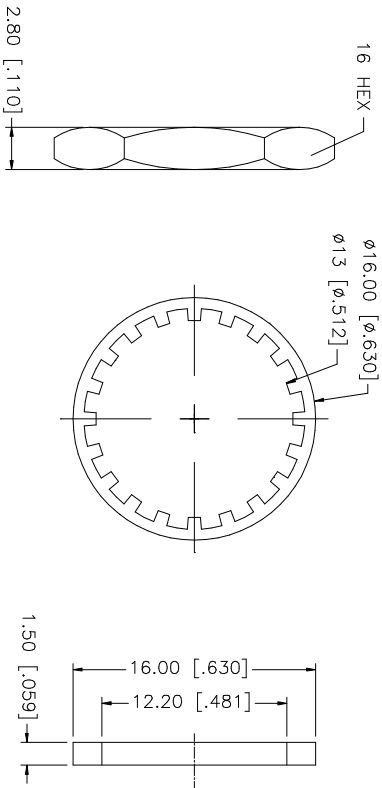


REV.	DATE	DESCRIPTION
A	04/05/03	UPDATE DRAWING FORMAT

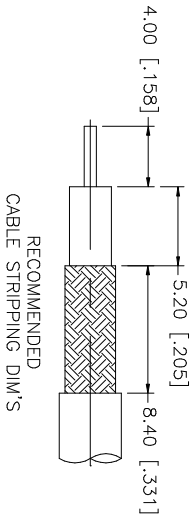

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
 2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

9	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS	DATE	PART DESCRIPTION TNC REVERSE POLARITY BULKHEAD CRIMP JACK (FOR RG174/u, 188A/u, 316/u CABLE)	PART NO. 122192RP	
8	SLEEVE	DELIRIN	NATURAL	1						
7	HEX NUT	BRASS	NICKEL	1						
6	LOCK WASHER	BRASS	NICKEL	1						
5	CONTACT PIN	BRASS	GOLD	1						
4	GASKET	RUBBER	RED	1						
3	BARREL	BRASS	NICKEL	1						
2	INSULATOR	TEFLON	NATURAL	1						
1	HOUSING/BODY	BRASS	NICKEL	1						
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/122/122192RP.DWG	DWG. NO. 122192RP.DWG	REV. A	SIZE A	SCALE NA

Amphenol Connex