

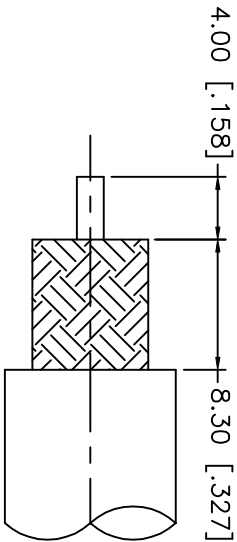
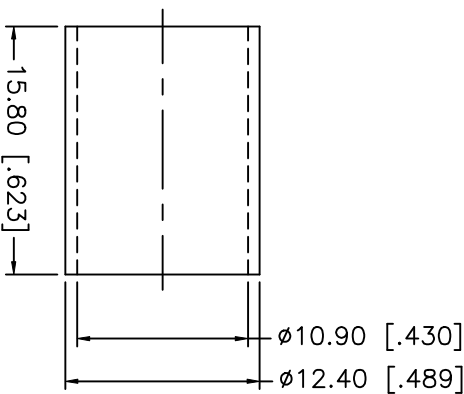


REV.	DATE	DESCRIPTION
A	10/25/99	UPDATE CONTACT PIN

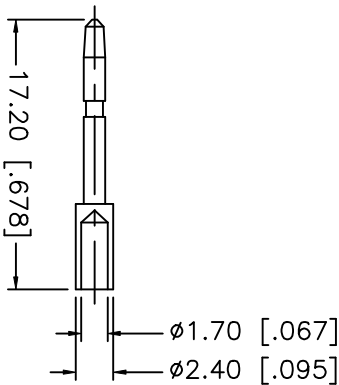

RECOMMENDED CABLE
STRIPPING DIMENSIONS

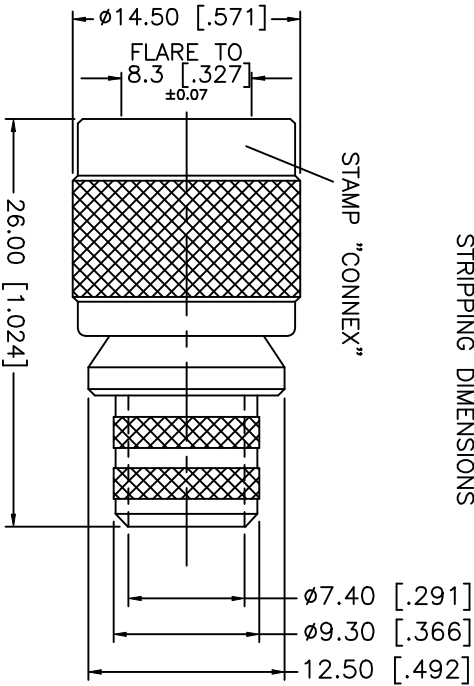

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMP CONTACT PIN
HEX CRIMP SIZE .068"

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY			APPROVALS		DATE	Amphenol - Connex CONNECTOR CORPORATION TNC CRIMP PLUG (FOR BELDEN 9292, 8213, CABLE)			
1 BODY	BRASS	NICKEL	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4			DRAWN	G.R.S.	10/25/99				
2 INSULATOR	TEFLON	NATURAL				CHECKED						
3 CONTACT PIN	BRASS	GOLD				ISSUED						
4 FERRULE	BRASS	NICKEL										
5												
6												
7												
8			DO NOT SCALE DRAWING									
TITLE												
SIZE FSQM NO. DWG. NO. REV.												
A 99001 122470.DWG NC												
SCALE NA PART NO. 122470 SHEET 1 OF 1												