
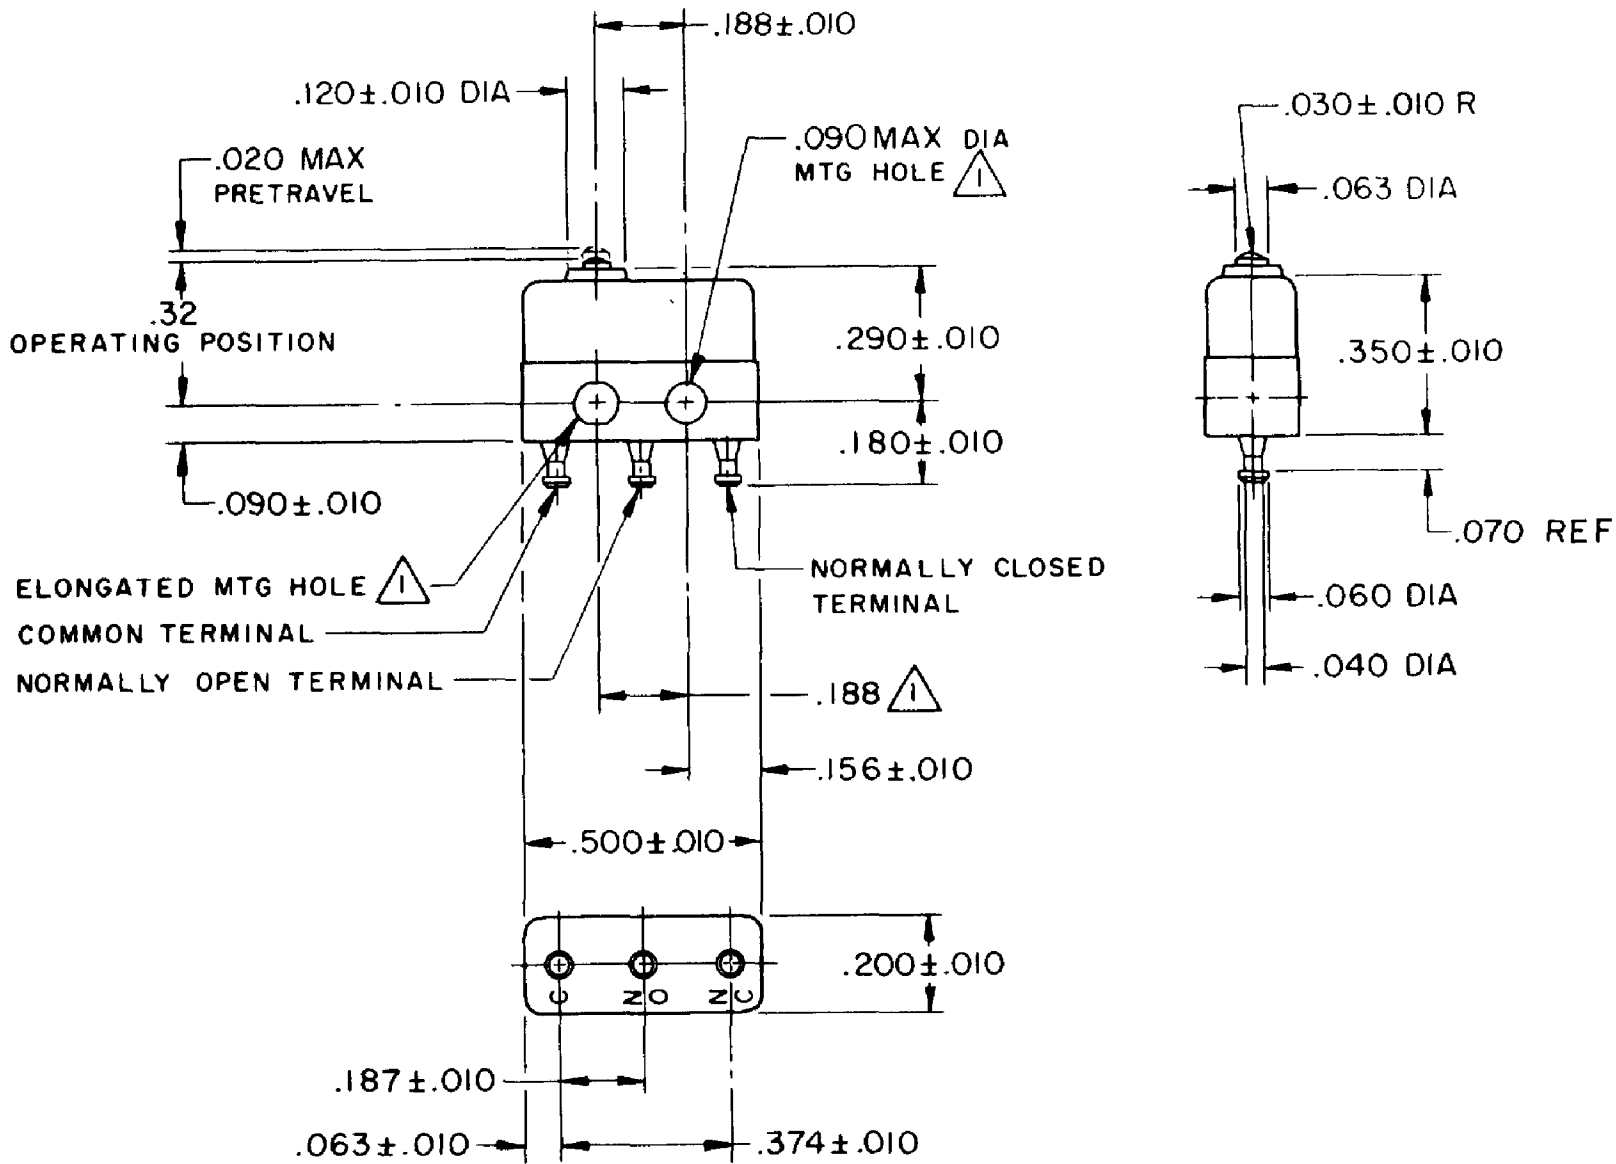


HONEYWELL PART NUMBER
12SX1-T
PRODUCT CODE VDK1000

REV	DOCUMENT	CHANGED BY	CHECK
9	0038448	VS 28APR08	BLR

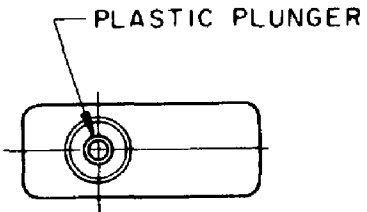

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
- 2 - TERMINALS ARE SOLDER DIPPED WITH ROHS-COMPLIANT TIN/COPPER/SILVER SOLDER.
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
- 4 - MOVABLE CONTACT MATERIAL - 24K SOLID GOLD
- 5 - STATIONARY CONTACT MATERIAL - GOLD ALLOY

RELEASE NO.	PR-1410
REPLACES	X42190-SX

CHARACTERISTICS
OPERATING FORCE - - - - 5 OZ MAX
RELEASE FORCE - - - - - 1 OZ MIN
DIFFERENTIAL TRAVEL - - - .003 MAX
OVERTRAVEL - - - - - .004 MIN

ELECTRICAL DATA			
CONTACT ARRANGEMENT S P D T			
30 VOLTS DC RATING			
		SEA LEVEL	50,000 FT
INDUCTIVE		0.5 AMP	0.5 AMP
RESISTIVE		1 AMP	1 AMP
MAXIMUM INRUSH 2 AMP			
APPROVALS	KEMA, CE	1A 250 V ~ T125 25E3	 05 
	UL, CSA	1A 125 VAC	  BRAND
			L22J

DESIGN UNITS: INCH			
TOLERANCES UNLESS NOTED:			
NO PLACE	X	±	
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	
ANGLES		±	
THIRD ANGLE PROJECTION			

DRAWN	SPK	13FEB08
CHECK	RJ	13FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell				
TITLE SWITCH - BASIC				
SIZE B	TYPE I	DRAWING NAME 12SX1-T		REV 9
SCALE -	WEIGHT:.003 LB MAX		SHEET 1 OF 1	