
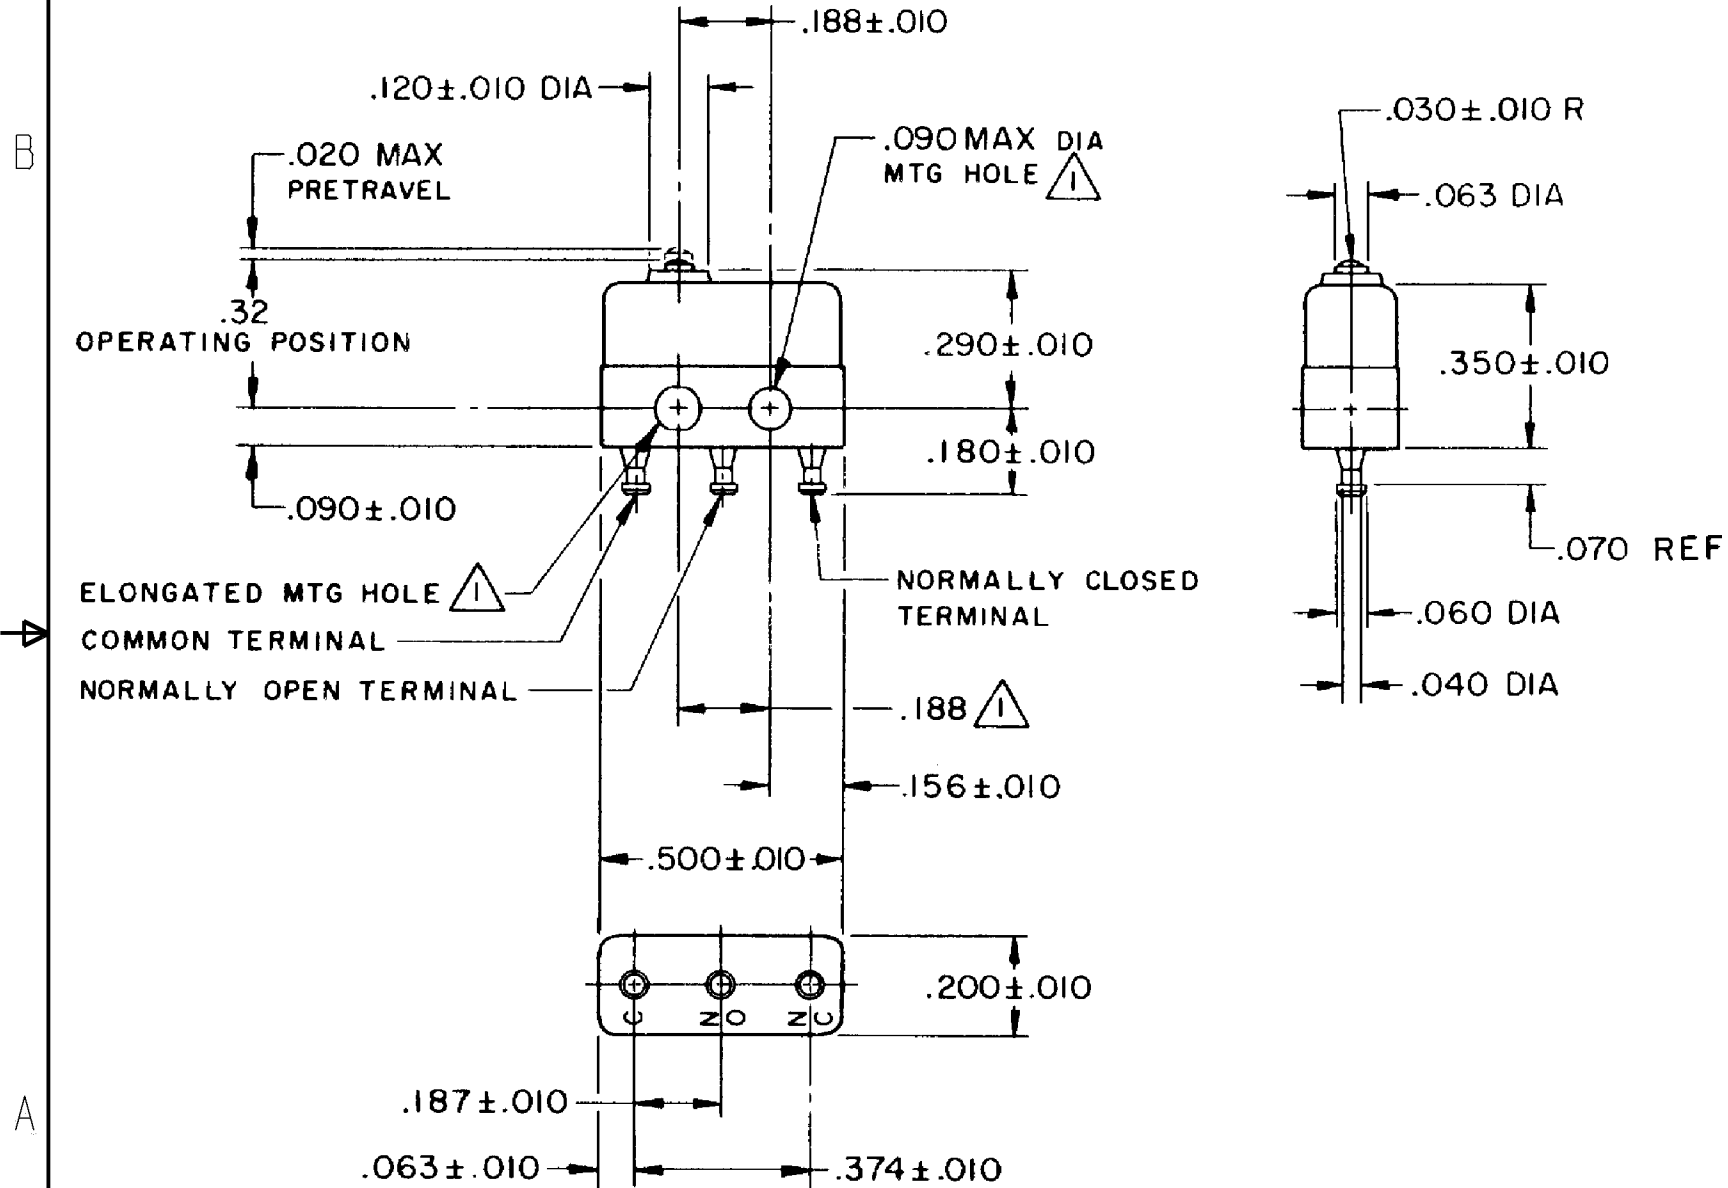


HONEYWELL PART NUMBER
12SX2-T
PRODUCT CODE VDK1050

REV	DOCUMENT	CHANGED BY	CHECK
11	0038448	VS 28APR08	BLR

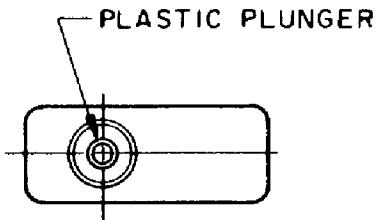

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
 - 2 - TERMINALS ARE SOLDER DIPPED WITH RoHS-COMPLIANT TIN/COPPER/SILVER SOLDER.
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
 - 4 - MOVABLE CONTACT MATERIAL-24K SOLID GOLD
 - 5 - STATIONARY CONTACT MATERIAL-GOLD ALLOY

RELEASE NO.	PR-1257-T
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH		DRAWN	SPK	13FEB08	Honeywell																
OPERATING FORCE — — — — 2.5-5 OZ		CONTACT ARRANGEMENT SPDT			TOLERANCES UNLESS NOTED:		CHECK	RJ	13FEB08																	
RELEASE FORCE— — — — — 1 OZ MIN		30 VOLTS DC RATING			NO PLACE X ±		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC																
DIFFERENTIAL TRAVEL— — — .002 MAX					ONE PLACE .X ±																					
OVERTRAVEL — — — — — .004 MIN					TWO PLACE .XX ±																					
					THREE PLACE .XXX ±																					
		INDUCTIVE 0.5 AMP 0.5 AMP			FOUR PLACE .XXXX ±		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B				TYPE I				DRAWING NAME 12SX2-T				REV 11				
		RESISTIVE 1 AMP 1 AMP			ANGLES ±																					
		MAXIMUM INRUSH 2 AMP			THIRD ANGLE PROJECTION																					
		KEMA, CE 1A 250 V ~ T125 25E3			UL, CSA 1A 125 VAC																					