
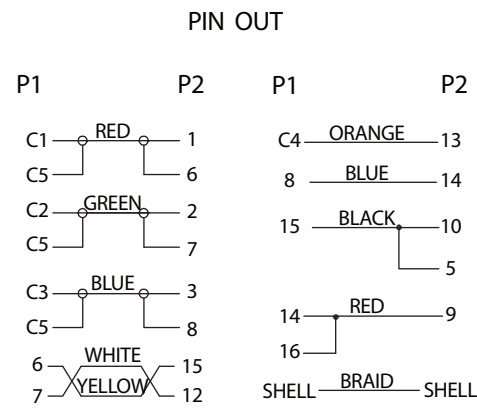
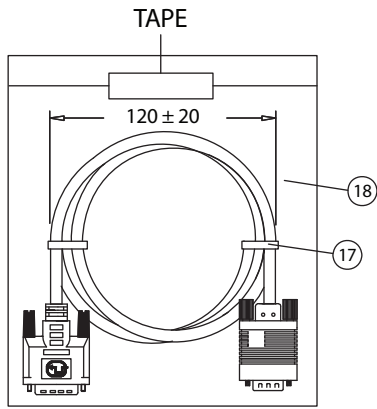


| REVISION |             |      |          |
|----------|-------------|------|----------|
| REV.     | DESCRIPTION | DATE | APPROVED |
|          |             |      |          |
|          |             |      |          |

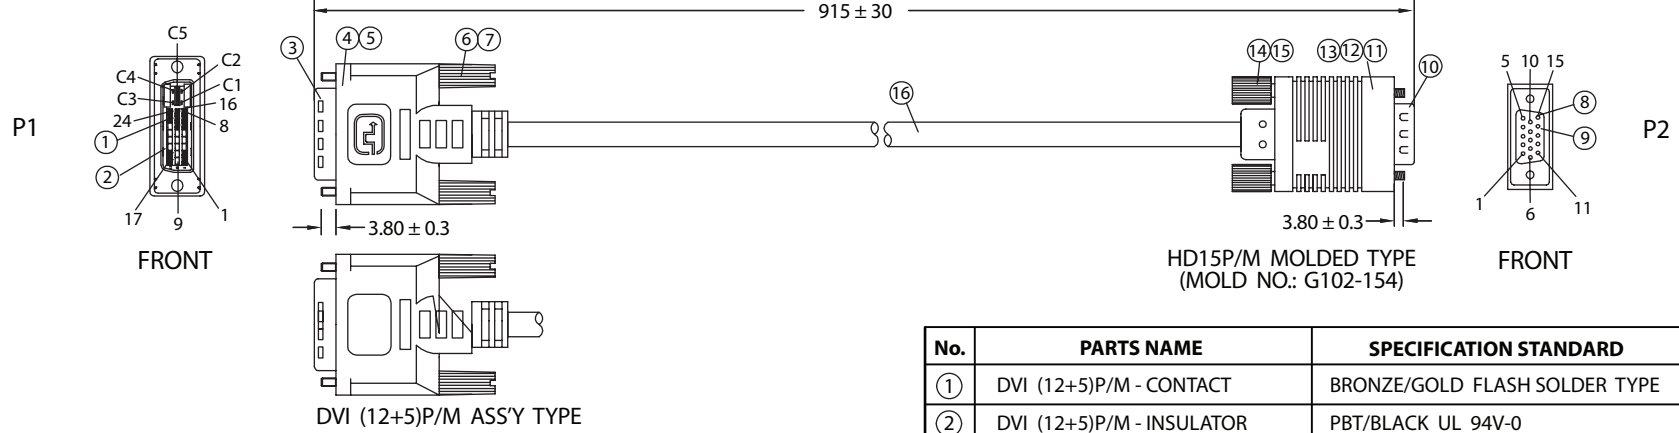

#### NOTES:

- CABLE: UL20276  
(28AWGxSP+FOIL)x3C+28AWGx4C+28AWGx1P+MYLAR+FOIL+BD  
OUTER JACKET: BLACK, OD: 6.5 ± 0.2mm  
PRINTING: "E166307 AWM 20276 28AWG 80°C 30V VW-1  
LOW VOLTAGE COMPUTER CABLE"
- CONNECTORS: DVI (12+5)P/M-HD15P/M
- HOOD: ASS'Y TYPE & MOLDED TYPE
- ELECTRICAL TEST:  
<1>.100% OPEN SHORT & MISS WIRE TEST  
<2>.INSULATION RESISTANCE: DC400V 10M ohm MIN.  
<3>.CONDUCTOR RESISTANCE: 3 ohm MAX.
- PACKING: 1PC/POLYBAG

| No. | PARTS NAME                | SPECIFICATION STANDARD          | QTY |  |
|-----|---------------------------|---------------------------------|-----|--|
| ①   | DVI (12+5)P/M - CONTACT   | BRONZE/GOLD FLASH SOLDER TYPE   | 17  |  |
| ②   | DVI (12+5)P/M - INSULATOR | PBT/BLACK UL 94V-0              | 1   |  |
| ③   | DVI (12+5)P/M - SHELL     | STEEL NICKEL PLATED             | 1   |  |
| ④   | DVI (12+5)P/M - CAN       | STEEL TIN PLATED                | 1   |  |
| ⑤   | DVI (12+5)P/M - COVER     | 45P PVC/COLOR: BLACK            | 1   |  |
| ⑥   | THUMB SCREW               | #4-40 2.8x45, NICKEL PLATED     | 2   |  |
| ⑦   | SCREW MOLD                | 35P PVC/COLOR: BLACK            | 2   |  |
| ⑧   | HD15P/M - CONTACT         | BRASS GOLD FLASH SOLDER TYPE    | 15  |  |
| ⑨   | HD15P/M - INSULATOR       | PBT/BLACK UL 94V-0              | 1   |  |
| ⑩   | HD15P/M - SHELL           | STEEL NICKEL PLATED             | 1   |  |
| ⑪   | HD15P/M - INNER MOLD      | PE NATURAL                      | 1   |  |
| ⑫   | HD15P/M - COPPER FOIL     | WIDTH: 28mm                     | 1   |  |
| ⑬   | HD15P/M - OUTER MOLD      | 45P PVC/COLOR: BLACK            | 1   |  |
| ⑭   | HD15P/M - THUMB SCREW     | UNC #4-40 Ø4xL50, NICKEL PLATED | 2   |  |
| ⑮   | HD15P/M - SCREW MOLD      | 35P PVC/COLOR: BLACK            | 2   |  |
| ⑯   | CABLE DVI 12+5 UL20276    | L03010ABK01A                    | 1   |  |
| ⑰   | MINI TIE                  | PE/BLACK                        | 2   |  |
| ⑱   | POLYBAG                   | PE/0.8x160x200mm                | 1   |  |

| Dim range (mm) | Tolerance +/- (mm) | Qualtek Electronics Corp.<br>WCI DIVISION                                                          |                |                 |
|----------------|--------------------|----------------------------------------------------------------------------------------------------|----------------|-----------------|
|                |                    | Part Number: 1321001-03 <span style="border: 1px solid green; padding: 2px;">RoHS Compliant</span> |                |                 |
| 0-1            | 0.15               | Description:<br>DVI (12+5)P/M - HD15P/M                                                            |                |                 |
| 1-6            | 0.20               |                                                                                                    |                |                 |
| 6-18           | 0.30               |                                                                                                    |                |                 |
| 18-50          | 0.50               |                                                                                                    |                |                 |
| 50-120         | 0.70               | Drawn / Date                                                                                       | Checked / Date | Approved / Date |
| 120-250        | 0.90               | B.Grubb<br>01-24-07                                                                                | 01-24-07       | JJH / 01-24-07  |
| 250-500        | 1.20               |                                                                                                    |                |                 |