
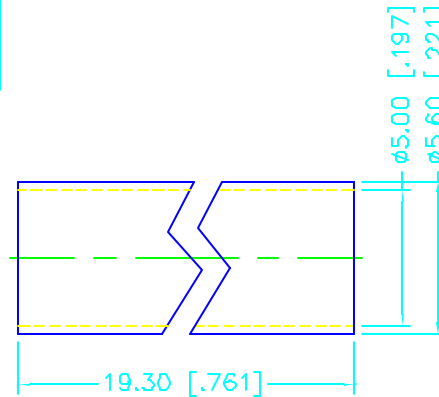
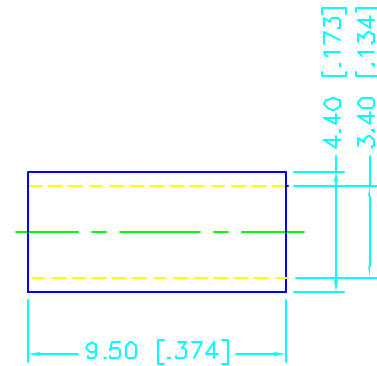

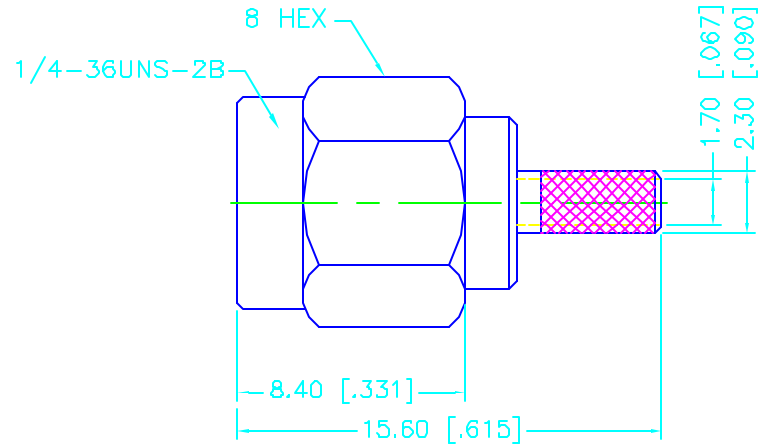


REV.	DATE	DESCRIPTION
D	11/08/99	UPDATE STRIPPING DIM'S

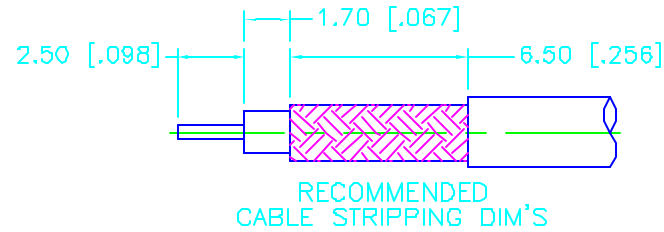

NOTE:
USE .151 HEX CRIMP DIE TO
TERMINATE FERRULE TO CABLE.
— CONNEX TOOL 47-10160
— IDEAL TOOL 36-489

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	 Connex Connector Corporation			
1 BODY	BRASS	GOLD	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	DRAWN G.R.S.	11/08/99				
2 INSULATOR	TEFLON	NATURAL		CHECKED		TITLE			
3 CONTACT PIN	BRASS	GOLD		ISSUED		SMA CRIMP PLUG			
4 HEAT SHRINK						316/U - DOUBLE BRAID			
5						SIZE A	FSCM NO. 99001	DWG. NO. 132178.DWG	REV. D
6						SCALE NA	PART NO. 132178	SHEET 1 OF 1	
7									
8			DO NOT SCALE DRAWING						