

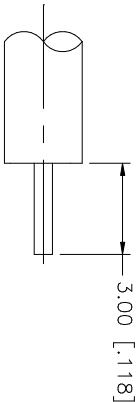
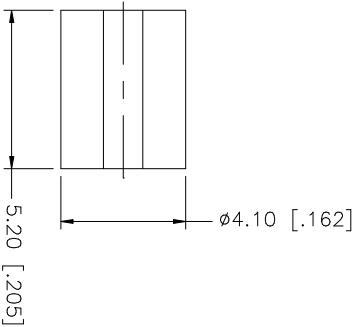
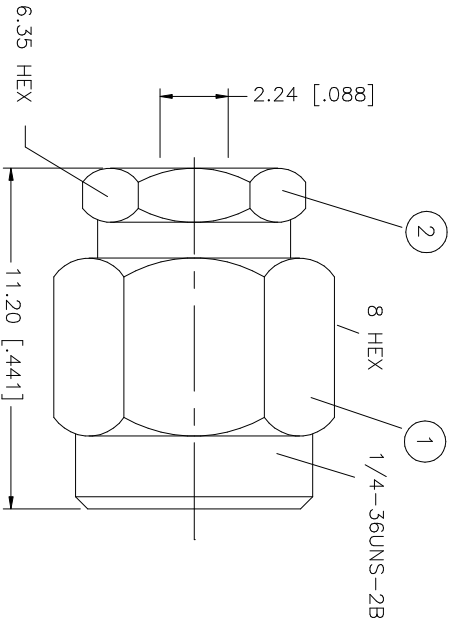


REV.	DATE	DESCRIPTION
A-1	01/25/04	UPDATE DRAWING FORMAT

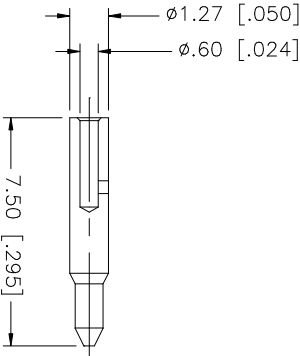

RECOMMENDED
CABLE STRIPPING DIM'S



1. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex		
8						DRAWN	G.R.S.		01/25/04	
7					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED				
6	RETAINER RING	BER. COPPER	NATURAL	1		ISSUED				
5	GASKET	SILICONE	RED	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1			
4	CONTACT PIN	BRASS	GOLD	1					PART NO.	
3	INSULATOR	TEFLON	NATURAL	1					132188	
2	BODY	BRASS	GOLD	1						
1	SHELL	STAINLESS STEEL	PASSIVATED S.S.	1						
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/132/132188.DWG	DWG. NO. 132188.DWG		REV. A-1	SIZE A