REV.	DATE	DESCRIPTION
A	06/25/98	ADDITIONS AND MODIFICATIONS TO CONNECTOR
B	01/27/00	MODIFY INSULATOR / CONTACT PIN

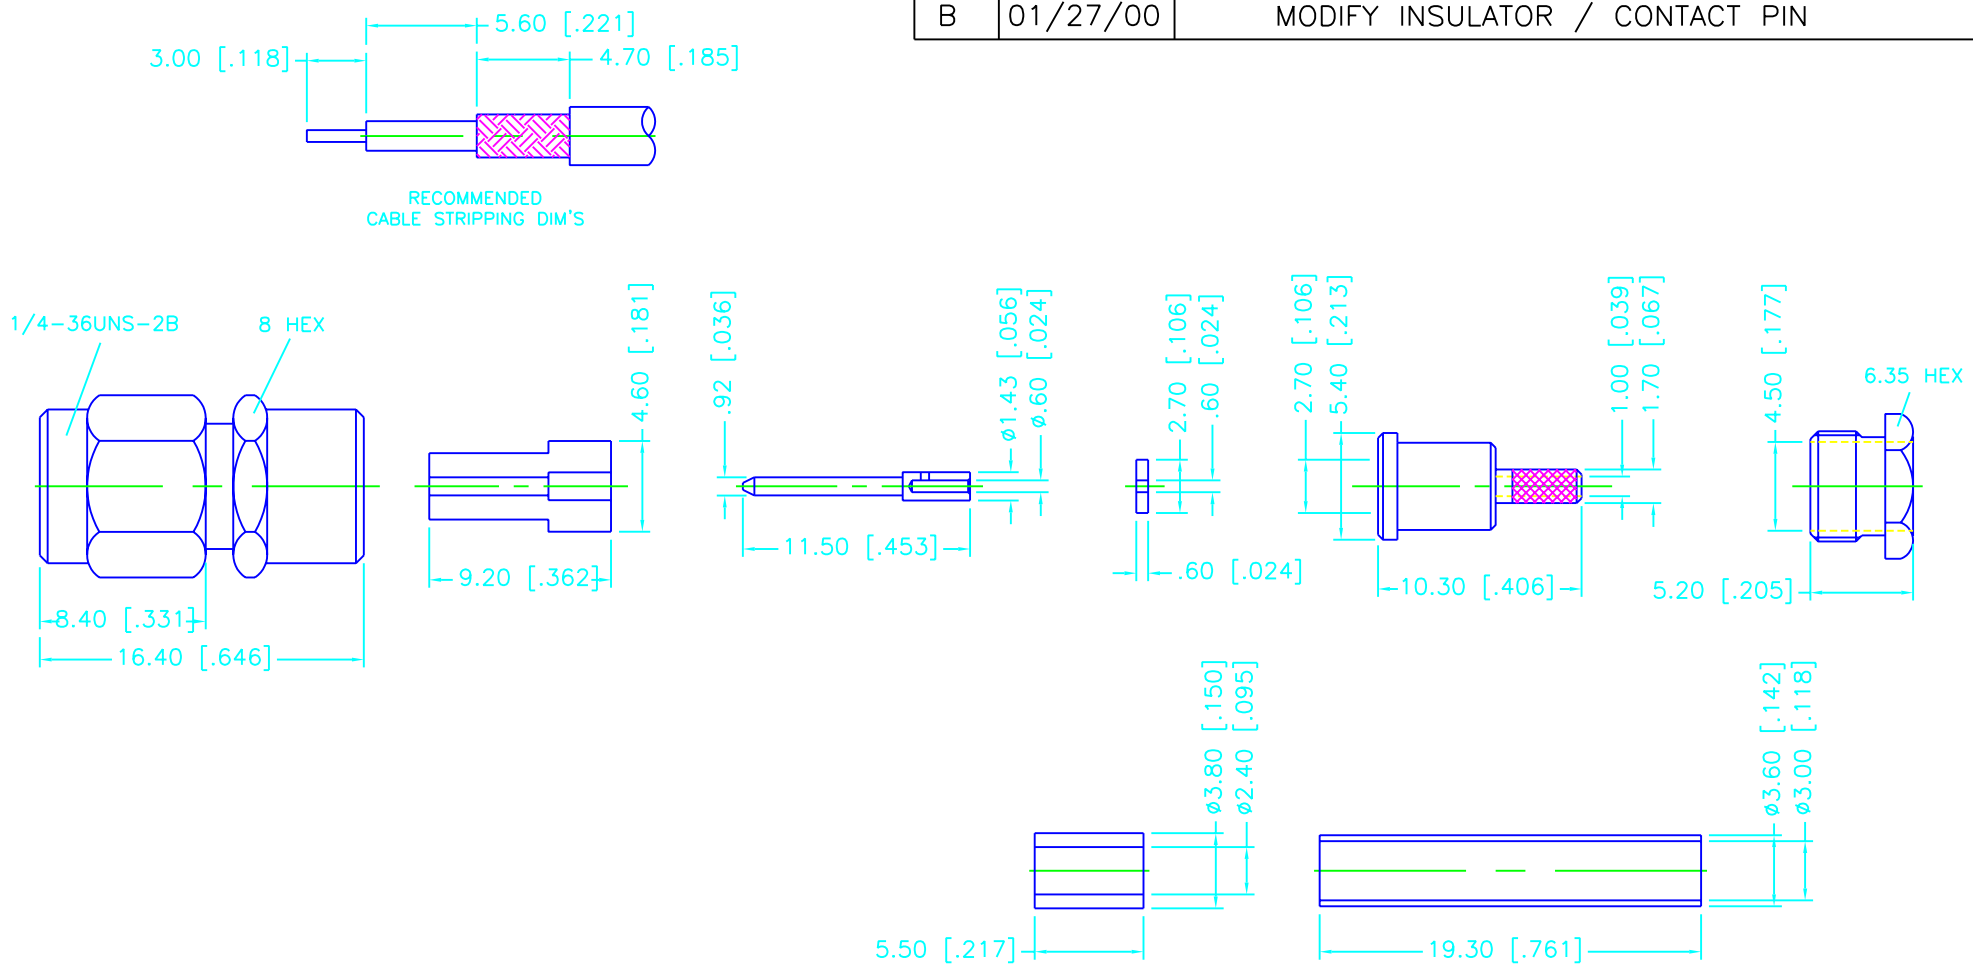

	DESCRIPTION	MATERIAL	FINISH
1	BODY	BRASS	GOLD
2	INSULATOR	TEFLON	NATURAL
3	CONTACT PIN	BRASS	GOLD
4	BARREL	BRASS	GOLD
5	HEX NUT	BRASS	GOLD
6	FERRULE	COPPER	GOLD
7	HEAT SHRINK		
8			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS

DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERANCE ONLY

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1
315-1000 = ± 1.6
1000-2000 = ± 2.4

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	G.R.S.	01/27/00
CHECKED		
ISSUED		

Connex Connector Corporation

TITLE: SMA CRIMP PLUG (FOR RG-178B/U, 196A/U CABLE)

SIZE	FSCM NO.	DWG. NO.	REV.
A	99001	132193.DWG	B

SCALE	PART NO.	SHEET
NA	132193	1 OF 1