


REV.	DATE	DESCRIPTION
A	01/25/04	UPDATE DRAWING FORMAT

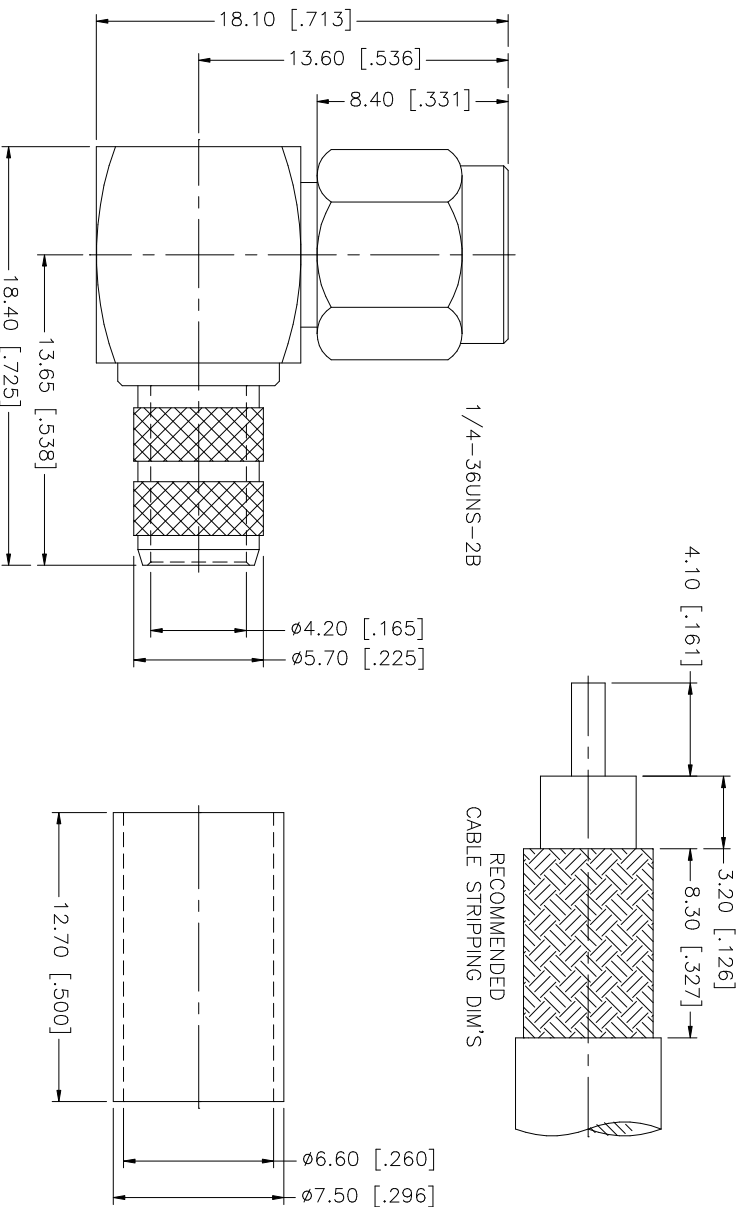

NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .255"

8																					
8																					
7																					
6																					
5	FERRULE	COPPER	GOLD	1																	
4	COVER	BRASS	GOLD	1																	
3	CONTACT PIN	BRASS	GOLD	1																	
2	INSULATOR	TEFLON	NATURAL	1																	
1	BODY	BRASS	GOLD	1																	
DESCRIPTION		MATERIAL		FINISH		QTY		DO NOT SCALE DRAWING		APPROVALS		DATE		PART DESCRIPTION		DWG. NO.		REV.		SCALE	
										DRAWN G.R.S.		01/25/04		SMA R/A CRIMP PLUG (FOR RG-8X, LMR-240)		132239.DWG		A		NA	
										CHECKED				PART NO.		132239					
										ISSUED				SHEET		1 OF 1					
										CAD FILE		C:/132/132239.DWG									
										UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.											
										UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLING ARE											
										0.5 - 8mm ± 0.20mm											
										8 - 30mm ± 0.40mm											
										30 - 120mm ± 0.50mm											
										UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE											
										.020 - .315 = ± 0.007"											
										.315 - 1.180 = ± 0.015"											
										1.180 - 4.724 = ± 0.020"											

Amphenol Connex