
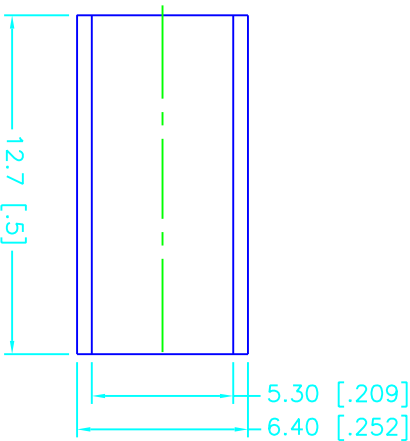
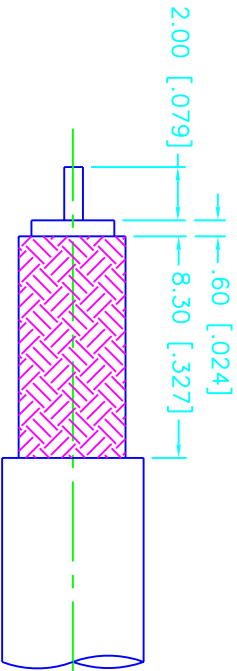
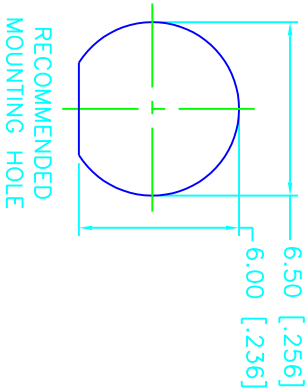


REV.	DATE	DESCRIPTION
NC	05/30/00	INITIAL RELEASE

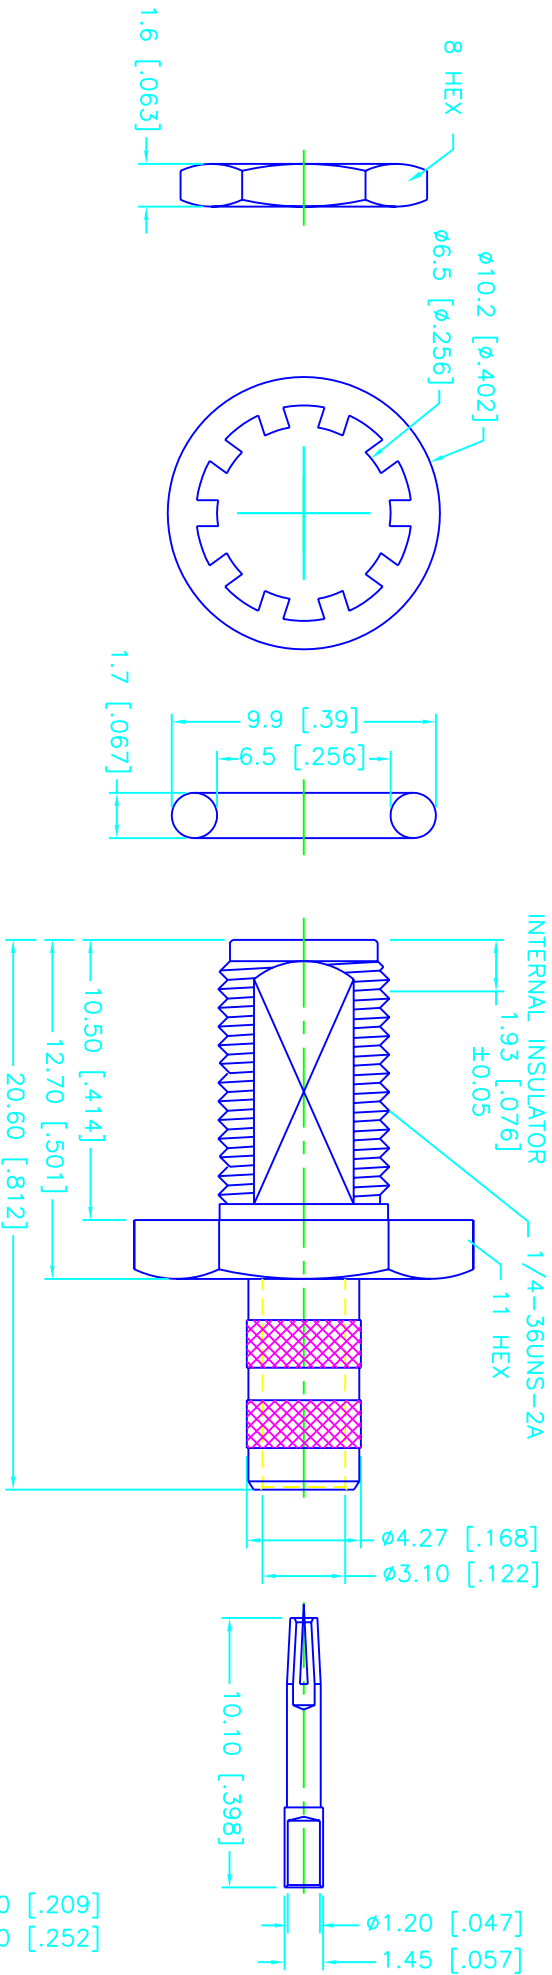

CRIMP NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .213"

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS		APPROVALS	DATE	 Connex Connector Corporation			
1 BODY	BRASS	GOLD	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY		DRAWN	G.R.S.	05/30/00	TITLE SMA BULKHEAD CRIMP JACK O-RING SEAL (FOR RG-58C/U, 58/U CABLE)		
2 INSULATOR	TEFLON	NATURAL			CHECKED					
3 CONTACT PIN	BER. COPPER	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4							
4 GASKET	SILICONE	RED			ISSUED					
5 LOCK WASHER	BRASS	GOLD								
6 HEX NUT	BRASS	GOLD								
7 FERRULE	COPPER	GOLD						SCALE	NA	PART NO.
8			DO NOT SCALE DRAWING					132280	SHEET	1 OF 1