REV.	DATE	DESCRIPTION
NC	05/30/00	INITIAL RELEASE

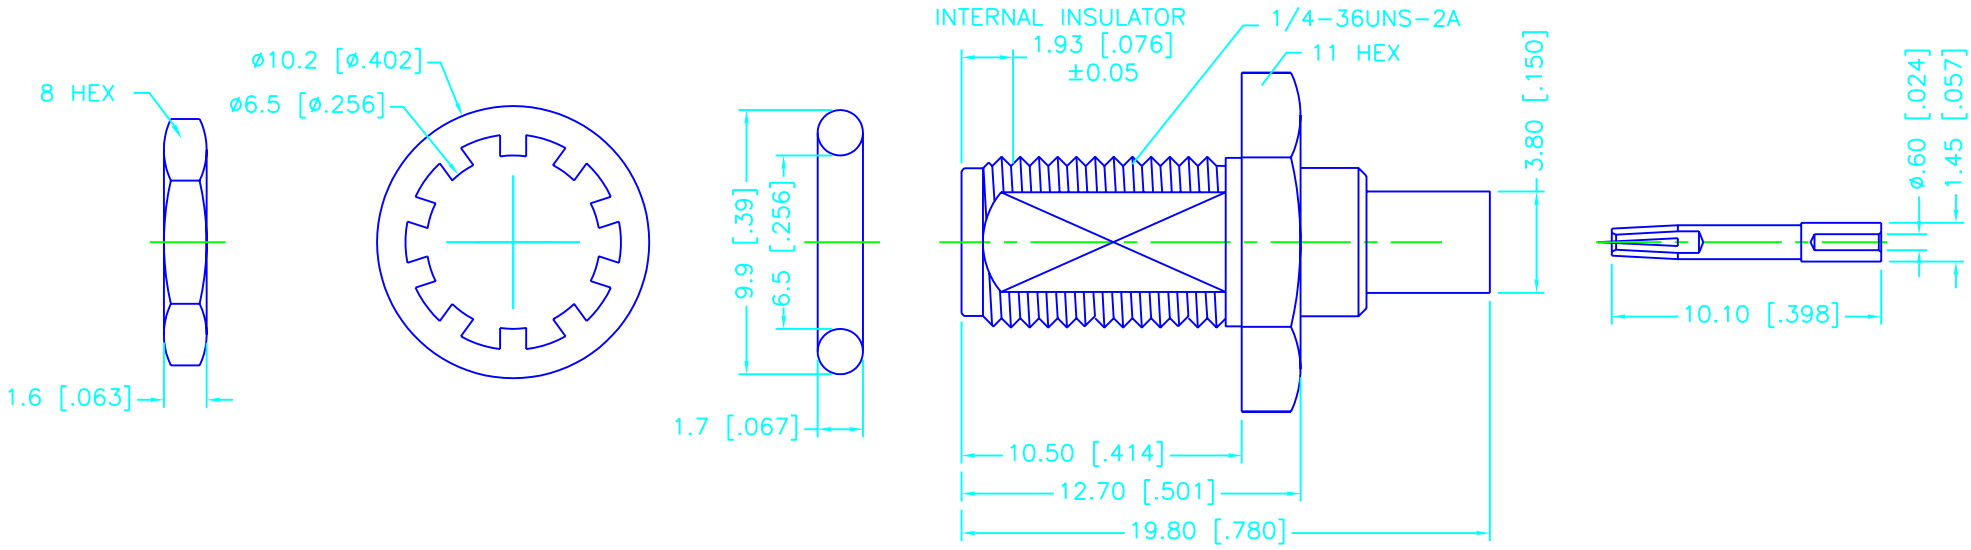

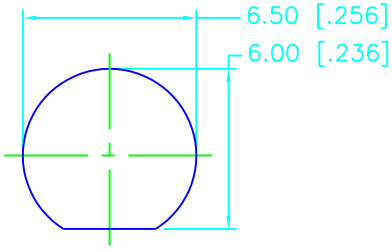

RECOMMENDED
MOUNTING HOLE

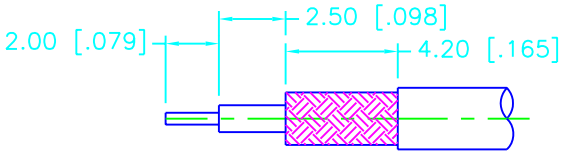

RECOMMENDED
CABLE STRIPPING DIM'S

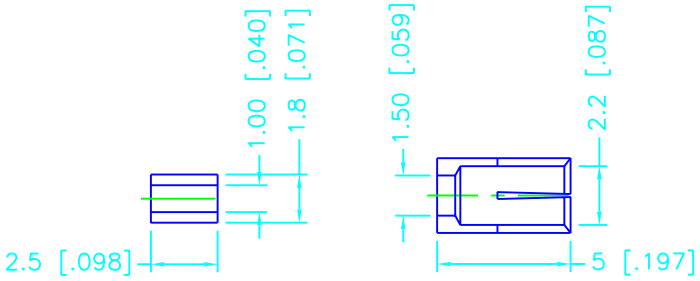

CRIMP NOTES:

1. CRIMPED FERRULE
   HEX CRIMP SIZE .128"

	DESCRIPTION	MATERIAL	FINISH
1	BODY	BRASS	GOLD
2	CONTACT PIN	BER. COPPER	GOLD
3	INSULATOR	TEFLON	NATURAL
4	GASKET	SILICONE	RED
5	LOCK WASHER	BRASS	GOLD
6	HEX NUT	BRASS	GOLD
7	FERRULE	COPPER	GOLD
8			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS

DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERANCE ONLY

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1
315-1000 = ± 1.6
1000-2000 = ± 2.4

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	G.R.S.	05/30/00
CHECKED		
ISSUED		

Connex
Connector Corporation

TITLE: SMA BULKHEAD CRIMP JACK O-RING SEAL (FOR RG-178B/U, 196A/U CABLE)

SIZE	FSCM NO.	DWG. NO.	REV.
A	99001	132286.DWG	NC

SCALE	PART NO.	SHEET
NA	132286	1 OF 1