
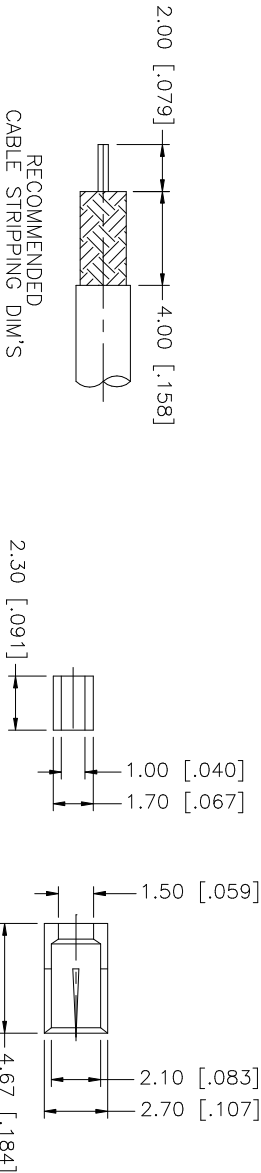
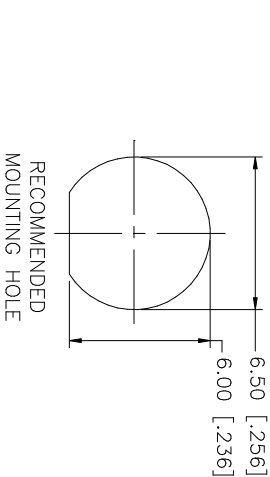


REV.	DATE	DESCRIPTION
NC	10/20/05	INITIAL RELEASE

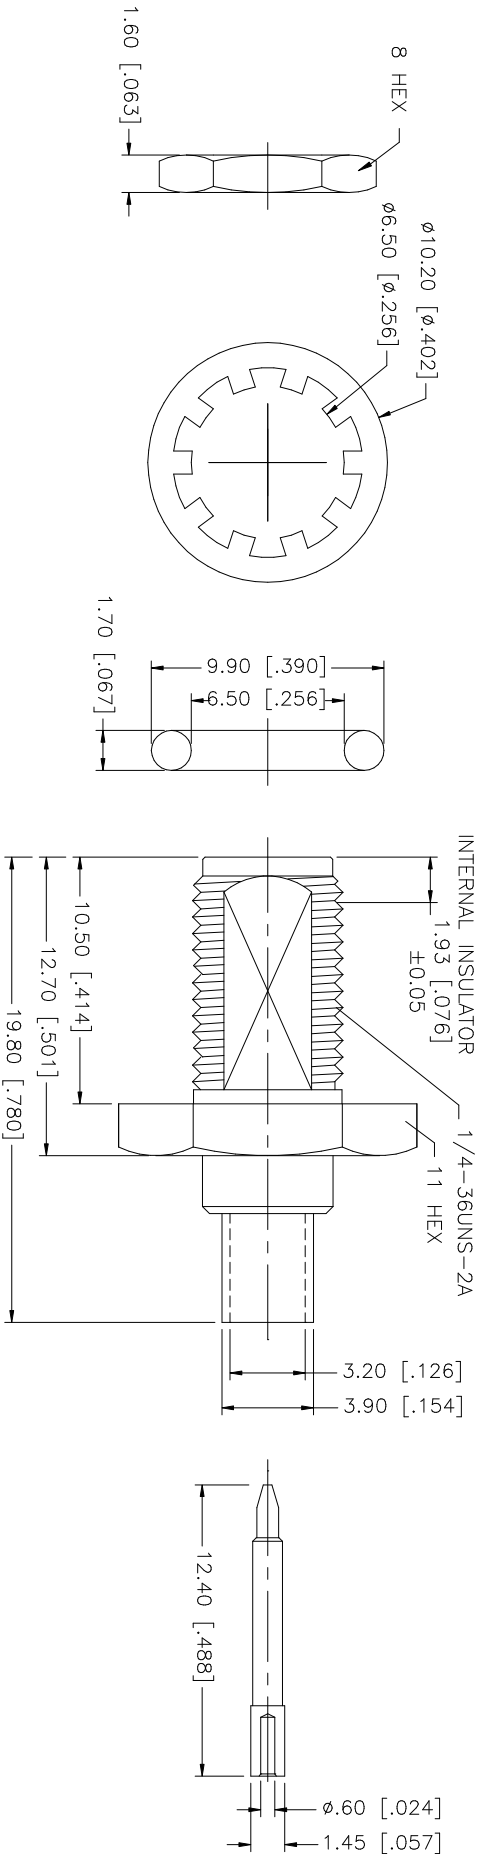

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
 2. CONTACT PIN TO SOLDER.

8	FERRULE	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	PART DESCRIPTION
7	HEX NUT	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	DRAWN	G.R.S.	10/20/05
6	LOCK WASHER	BRASS	GOLD	1	0.5 - 8mm $\pm$ 0.20mm	CHECKED		
5	GASKET	SILICONE	RED	1	8 - 30mm $\pm$ 0.40mm	ISSUED		
4	CONTACT PIN	BRASS	GOLD	1	30 - 120mm $\pm$ 0.50mm	SHEET	1 OF 1	
3	INSULATOR	TEFLON	NATURAL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	PART NO.		1 322286RP
2	BODY	BRASS	GOLD	1	.020 - .315 $\pm$ 0.007"	DWG. NO.	1 322286RP.DWG	
1					.315 - 1.180 $\pm$ 0.015"	REV.	B	
					1.180 - 4.724 $\pm$ 0.020"	SIZE	A	
						SCALE	NA	
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/132/1322286RP.DWG	

Amphenol Connex

SMA R/P BULKHEAD CRIMP JACK
(FOR RG-178B/U, 196A/U CABLE)