

PART NUMBER	ITEM ① BODY	ITEM ② SLIDER	ITEM ③ CONTACT	ITEM ④ INSULATOR TEFLON	ITEM ⑤ RETENTION SPRINGS BERYLLIUM COPPER UNPLATED	ITEM ⑥ COUPLING NUT BERYLLIUM COPPER NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN
142-1901-821	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BRASS NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN			

DRAWING NO.									
C - 142-1901-821/830									
0		REVISIONS							
ENGINEERING RELEASE									
1	5-18-04		T A K				4-29-04	ECN 49278	

INSTRUCTIONS FOR USE:


1. WITH SLIDER IN THE ENGAGED POSITION THE CONNECTOR FUNCTIONS LIKE A STANDARD SMA CONNECTOR.
TIGHTEN (SPIN) THE KNURLED NUT BY HAND TO OBTAIN FULL MATING ENGAGEMENT OR DISENGAGEMENT.
2. QUICK CONNECT FUNCTION:

A. WITH SLIDER IN THE DISENGAGED POSITION, SLIDE THE CABLED CONNECTOR ONTO THE JACK RECEPTACLE,
OVER THE JACK THREADS BY PUSHING ON THE BACK OF THE KNURLED NUT.

B. ENGAGE THE SLIDER WHILE MAINTAINING LIGHT FORWARD PRESSURE ON THE NUT. THIS ACTION IS DONE BY
SLIPPING YOUR FINGERS FROM THE NUT TO THE SLIDER IN ONE MOTION.

C. ONCE THE SLIDER IS ENGAGED THE KNURLED NUT CAN BE TURNED 1 TURN OR LESS TO OBTAIN
FULL MATING ENGAGEMENT PERFORMANCE.

D. DISENGAGE THE CONNECTOR BY FIRST LOOSENING THE COUPLING NUT A PARTIAL TURN.
THEN DISENGAGE THE SLIDER AND REMOVE THE CONNECTOR.

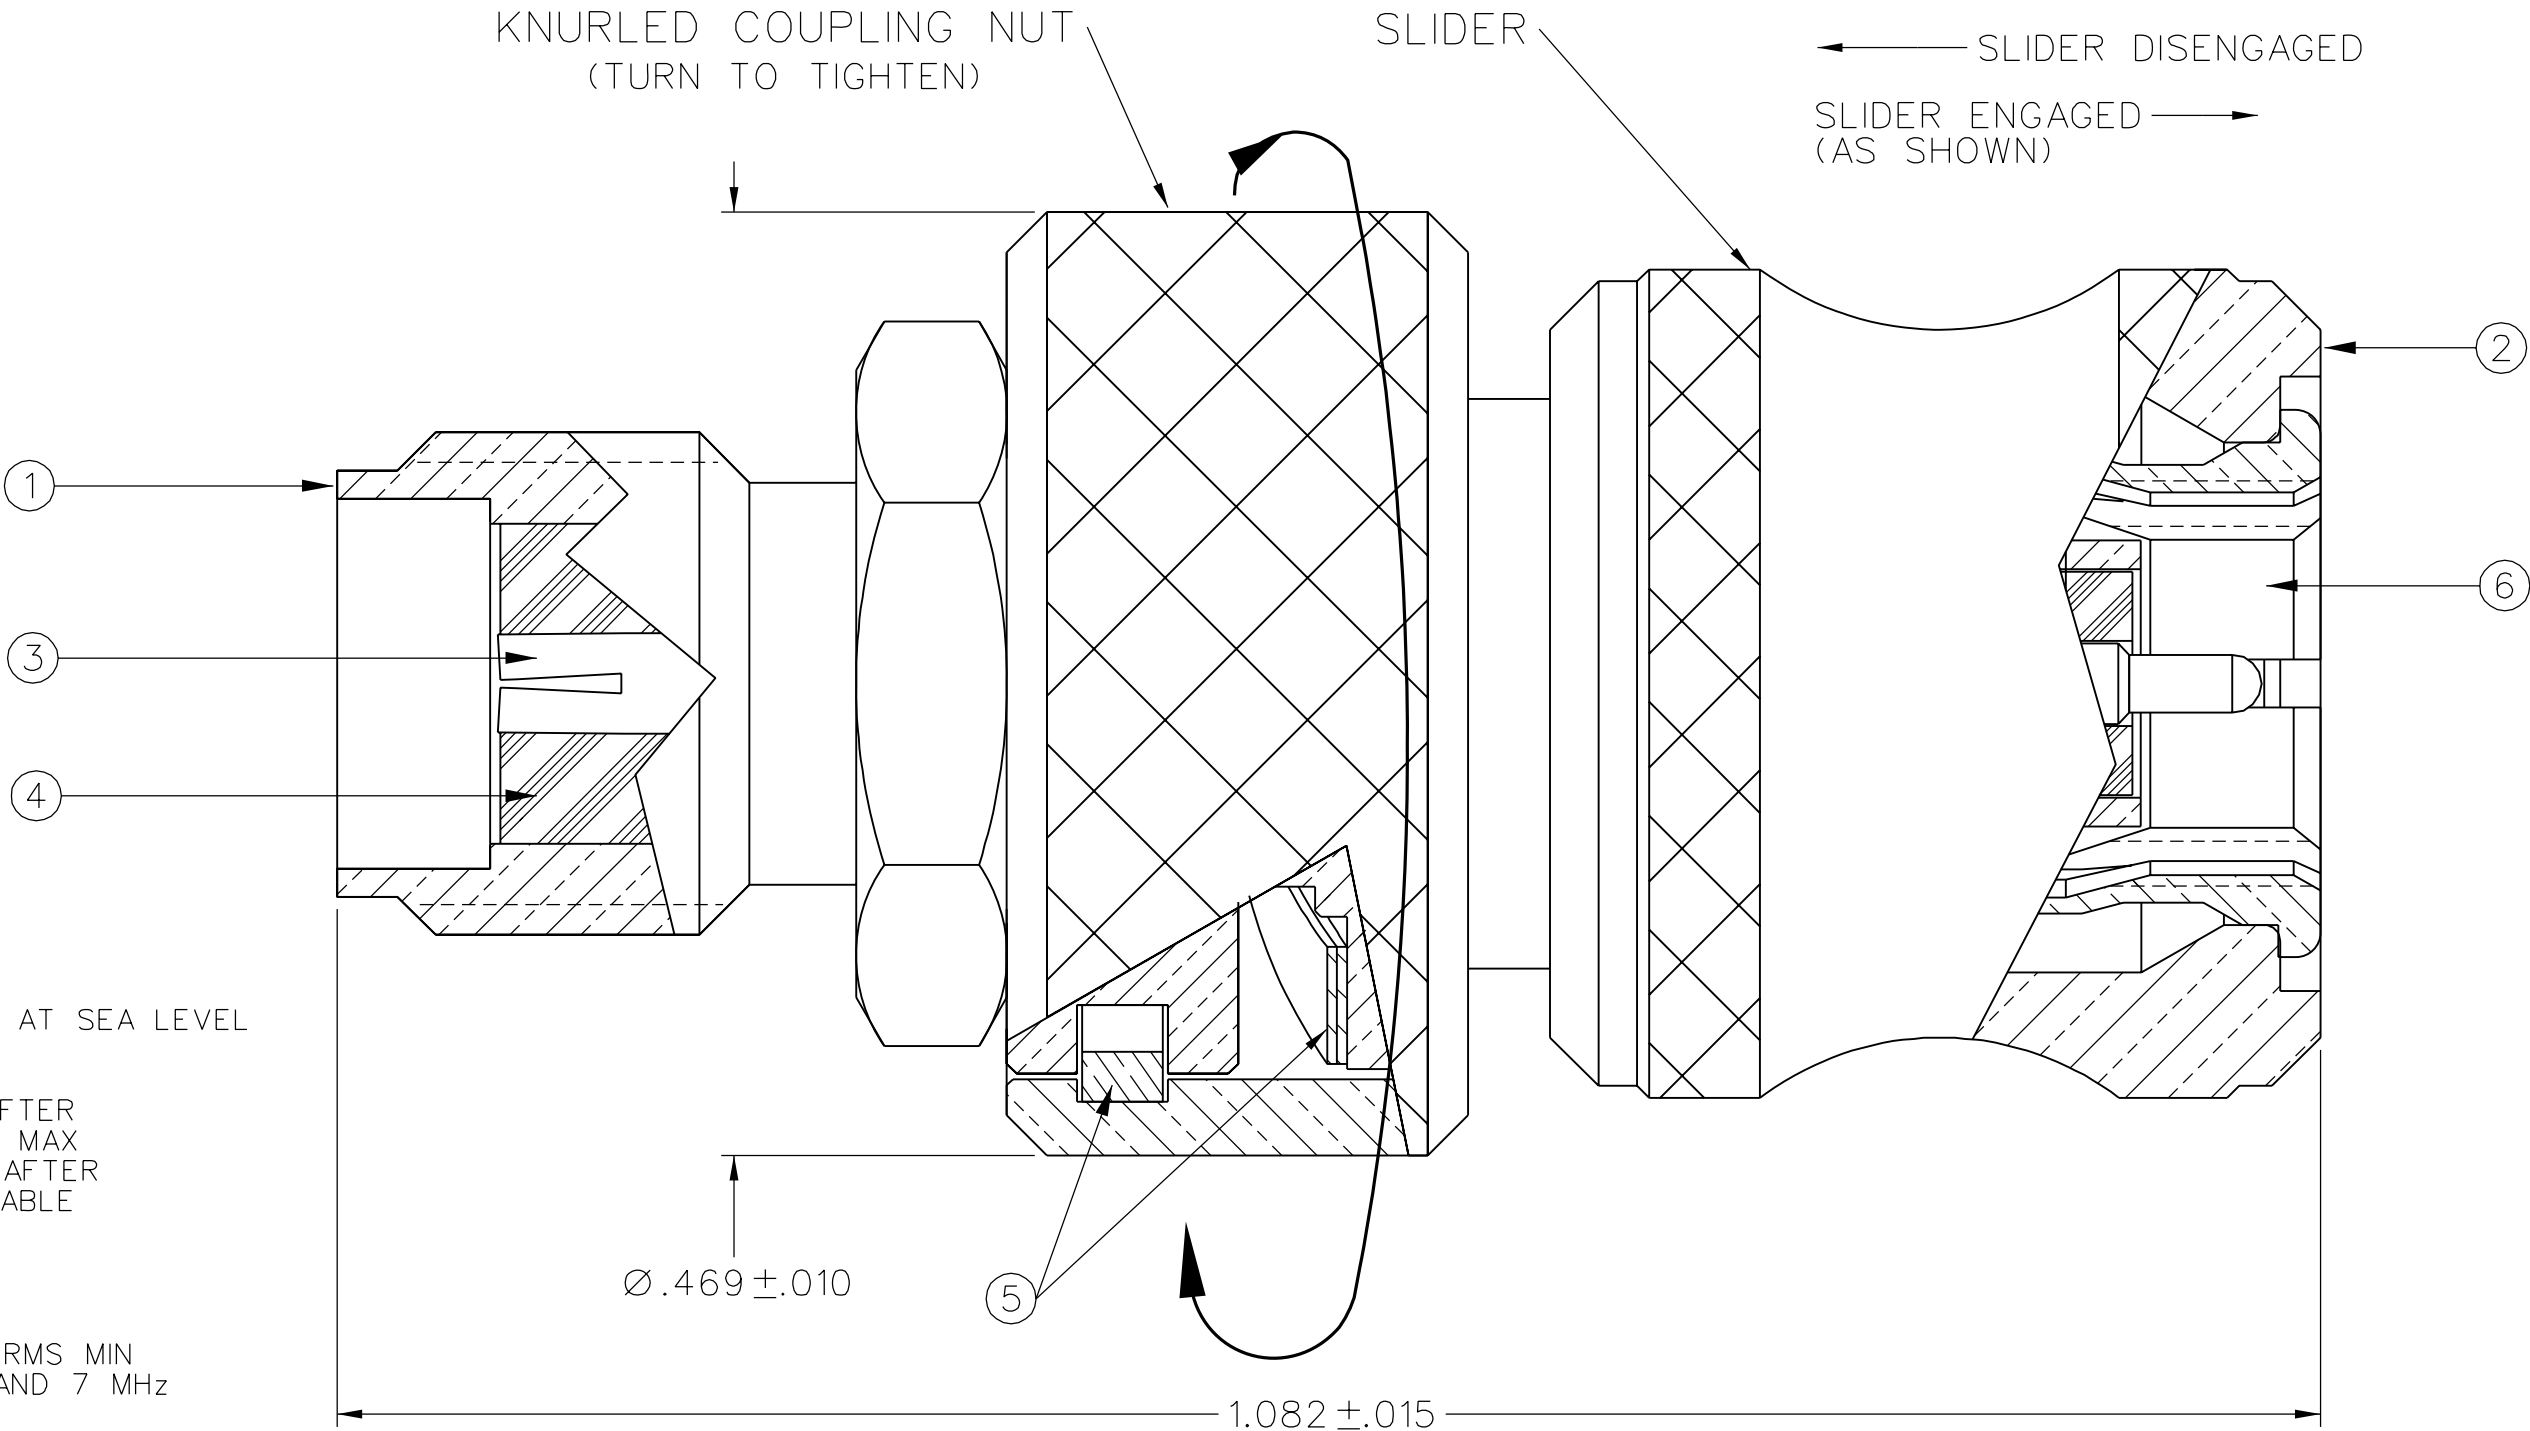

NOTES:

1. SPECIFICATIONS:

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: 0-18 GHZ
VSWR: 1.05+.005 F MAX (F IN GHZ)
WORKING VOLTAGE: 500 VRMS MAX AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS MIN AT SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHM MIN
CONTACT RESISTANCE:
CENTER CONTACT - INITIAL 4.0 MILLIOHM MAX, AFTER
ENVIRONMENTAL 6.0 MILLIOHM MAX
OUTER CONDUCTOR - INITIAL 2.0 MILLIOHM MAX, AFTER
ENVIRONMENTAL NOT APPLICABLE
BRAID TO BODY - NOT APPLICABLE
CORONA LEVEL: 375 VOLTS MIN AT 70,000 FEET
INSERTION LOSS: .06√F MAX (F IN GHZ) AT 6 GHZ
RF LEAKAGE: -90 DB MIN AT 2.5 GHZ
RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 1000 VRMS MIN
AT 4 AND 7 MHZ

MECHANICAL:

ENGAGE/DISENGAGE TORQUE: 2 INCH-POUNDS MAX
MATING TORQUE: 7-10 INCH POUNDS
COUPLING PROOF TORQUE: 15 INCH-POUNDS MIN
COUPLING NUT RETENTION: 60 LBS MIN
CONTACT RETENTION: 6 LBS MIN AXIAL FORCE
CABLE ACCEPTABILITY: NOT APPLICABLE
CABLE HEX CRIMP SIZE: NOT APPLICABLE
CABLE RETENTION: NOT APPLICABLE
DURABILITY: 1000 CYCLES MIN

ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-A-55339)
THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B
OPERATING TEMPERATURE: -65 DEG C TO 165 DEG C
CORROSION: MIL-STD-202, METHOD 101, CONDITION B
SHOCK: MIL-STD-202, METHOD 213, CONDITION I
VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED
PER ASME Y 14.5M - 1994

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY T.A.Kari	DATE 9-16-03	 Connectivity Solutions P.O. Box 1732 Waseca, MN 56093 1-800-247-8256	
DECIMALS .XX	mm	CHECKED BY	DATE		
.XXX ±.003		APPROVED BY T.A.Kari	DATE 5-18-04	TITLE ADAPTER, SMA, IN SERIES JACK TO QUICK CONNECT PLUG	
MATL		RELEASE DATE	5-18-04	SHEET 2 OF 2	DRAWING NO. C - 142-1901-821/830
FINISH		U/M INCH	SCALE 10:1		