| REV. | DATE | DESCRIPTION |
|---|---|---|
| A | 03/27/05 | UPDATE DRAWING FORMAT |

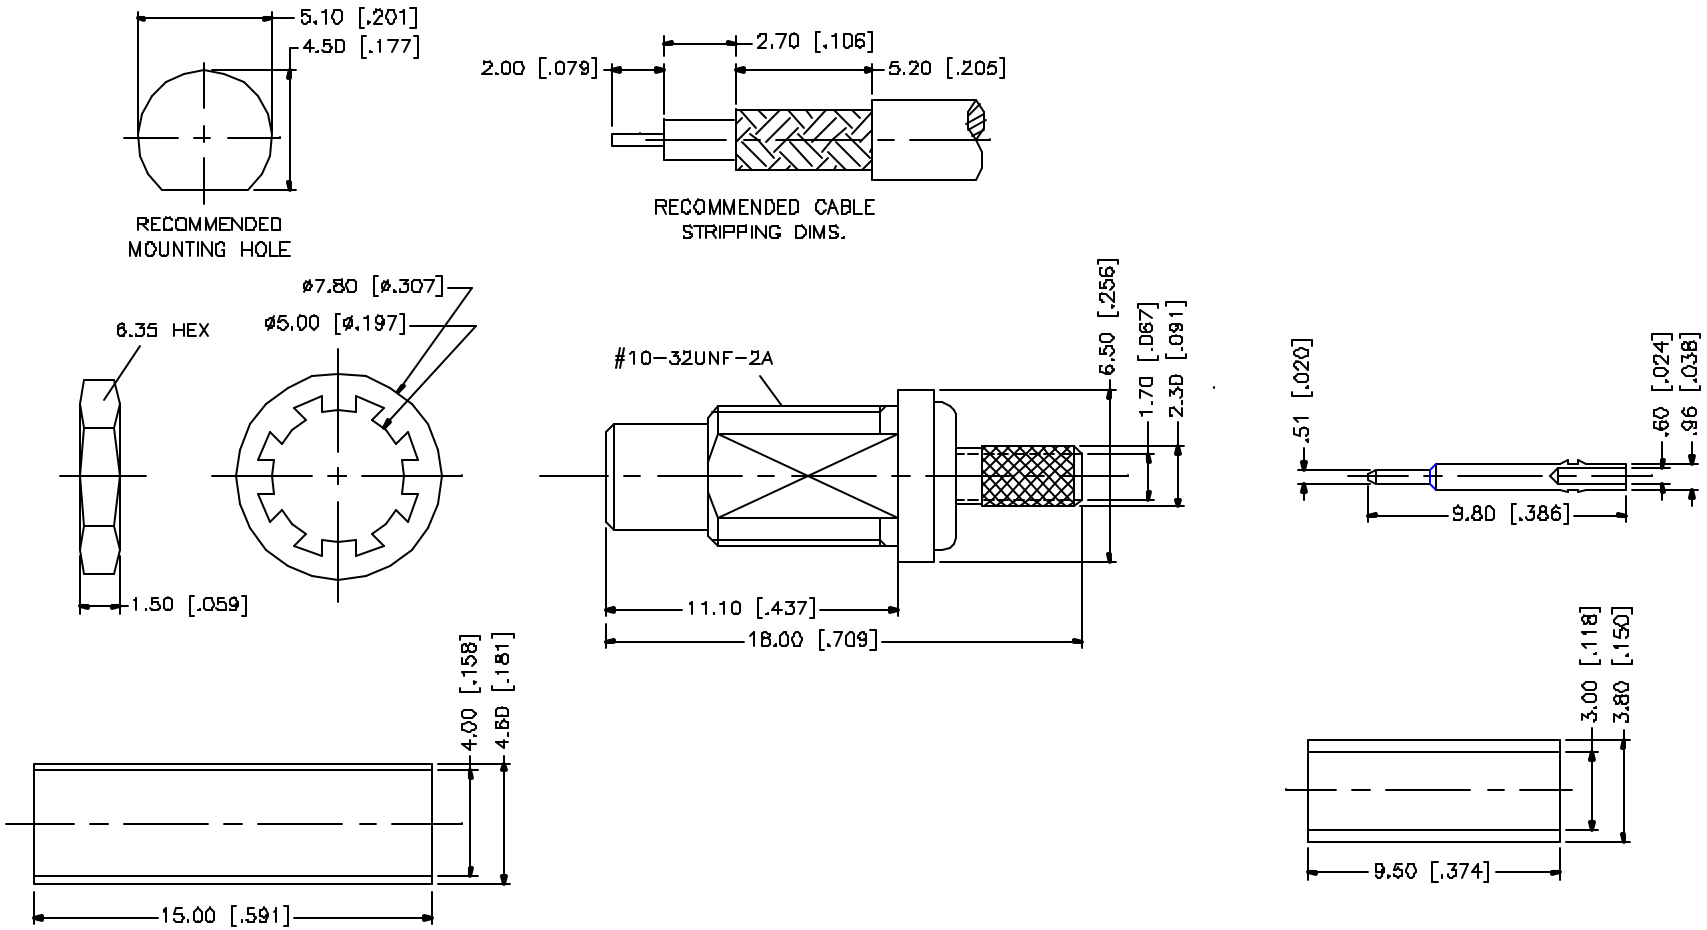


NOTES:

1. CRIMPED FERRULE
   HEX CRIMP SIZE .128"
2. MAX. PANEL THICKNESS = 2.4mm

| | DESCRIPTION | MATERIAL | FINISH | QTY |
|---|---|---|---|---|
| 8 | | | | |
| 7 | HEAT SHRINK TUBE | | | 1 |
| 6 | HEX NUT | BRASS | GOLD | 1 |
| 5 | LOCK WASHER | BRASS | GOLD | 1 |
| 4 | FERRULE | COPPER | GOLD | 1 |
| 3 | CONTACT PIN | BRASS | GOLD | 1 |
| 2 | INSULATOR | TEFLON | NATURAL | 1 |
| 1 | BODY | BRASS | GOLD | 1 |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 – 6mm ± 0.20mm
6 – 30mm ± 0.40mm
30 – 120mm ± 0.60mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | G.R.S. | 03/27/05 |
| CHECKED | | |
| ISSUED | | |
| SHEET | 1 OF 1 | |
| CAD FILE | C:/152/152105.DWG | |

**Amphenol Connex**

PART DESCRIPTION
SMC BULKHEAD CRIMP JACK
(FOR RG-174/U, 188A/U, 316/U)

PART NO. 152105

| DWG. NO. | REV. | SIZE | SCALE |
|---|---|---|---|
| 152105.DWG | A | A | NA |