



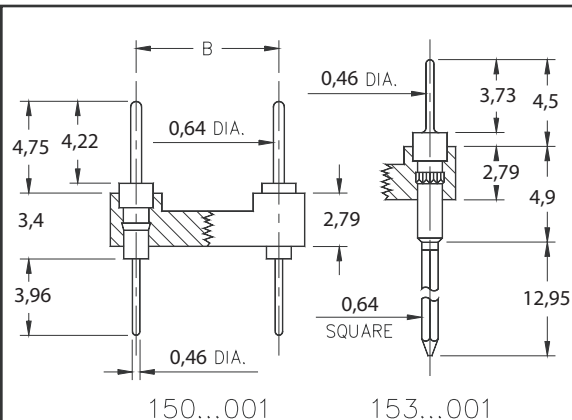

- Series 150 DIL Headers are equipped with 0,64 dia. pins MM #0290. See page 173 for details.
- Series 153 DIL Headers have 3-level wrapposts MM #5301. See page 184 for details.
- Both series have 0,46 dia. solder tails which are pluggable into standard contacts.
- Insulators are high temperature thermoplastic.

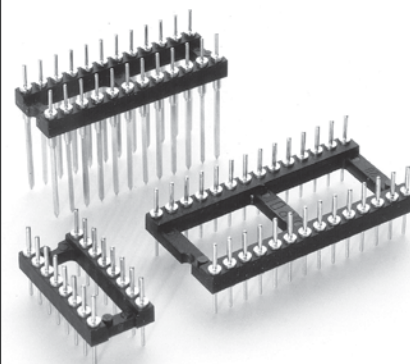

Total number of pins				Quantity per tube	Ordering Information				
	A	B	C		Solder Tail		3 Level Wrapost		
10	12,6	5,08	7,6	40	150-XX-210-00-001000	153-10-210-00-001000			
4	5,0	7,62	10,1	102	150-XX-304-00-001000	153-10-304-00-001000			
6	7,6	7,62	10,1	67	150-XX-306-00-001000	153-10-306-00-001000			
8	10,1	7,62	10,1	50	150-XX-308-00-001000	153-10-308-00-001000			
10	12,6	7,62	10,1	40	150-XX-310-00-001000	153-10-310-00-001000			
14	17,7	7,62	10,1	29	150-XX-314-00-001000	153-10-314-00-001000			
16	20,3	7,62	10,1	25	150-XX-316-00-001000	153-10-316-00-001000			
18	22,8	7,62	10,1	22	150-XX-318-00-001000	153-10-318-00-001000			
20	25,3	7,62	10,1	20	150-XX-320-00-001000	153-10-320-00-001000			
22	27,8	7,62	10,1	18	150-XX-322-00-001000	153-10-322-00-001000			
24	30,4	7,62	10,1	16	150-XX-324-00-001000	153-10-324-00-001000			
28	35,5	7,62	10,1	14	150-XX-328-00-001000	153-10-328-00-001000			
20	25,4	10,16	12,7	20	150-XX-420-00-001000	153-10-420-00-001000		For RoHS compliance select plating code. XX= Plating Code See Below	
22	27,8	10,16	12,7	18	150-XX-422-00-001000	153-10-422-00-001000			
24	30,4	10,16	12,7	16	150-XX-424-00-001000	153-10-424-00-001000			
28	35,5	10,16	12,7	14	150-XX-428-00-001000	153-10-428-00-001000			
32	40,6	10,16	12,7	12	150-XX-432-00-001000	153-10-432-00-001000			
24	30,5	15,24	17,7	16	150-XX-624-00-001000	153-10-624-00-001000			
28	35,5	15,24	17,7	14	150-XX-628-00-001000	153-10-628-00-001000			
32	40,6	15,24	17,7	12	150-XX-632-00-001000	153-10-632-00-001000			
36	45,7	15,24	17,7	11	150-XX-636-00-001000	153-10-636-00-001000			
40	50,8	15,24	17,7	10	150-XX-640-00-001000	153-10-640-00-001000			
42	53,3	15,24	17,7	9	150-XX-642-00-001000	153-10-642-00-001000			
48	60,9	15,24	17,7	8	150-XX-648-00-001000	153-10-648-00-001000			
50	63,5	15,24	17,7	8	150-XX-650-00-001000	153-10-650-00-001000			
52	66,0	15,24	17,7	7	150-XX-652-00-001000	153-10-652-00-001000			
50	63,5	22,86	25,3	8	150-XX-950-00-001000	153-10-950-00-001000			
52	66,0	22,86	25,3	7	150-XX-952-00-001000	153-10-952-00-001000			
64	81,2	22,86	25,3	6	150-XX-964-00-001000	153-10-964-00-001000			
SPECIFY PLATING CODE XX=					10	90	40		
Pin Plating					0,25µm Au	5,08µm Sn/Pb	5,08µm Sn		

For RoHS compliance select plating code.

XX= Plating Code
See Below