




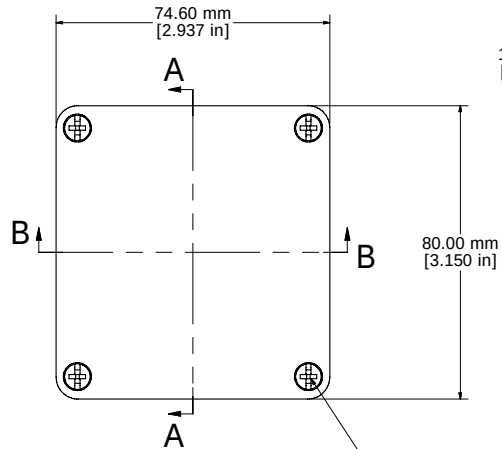


ASSEMBLY

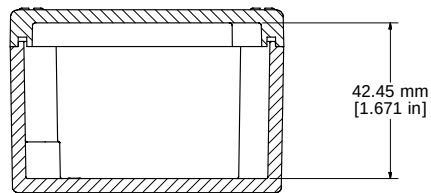


SECTION B-B

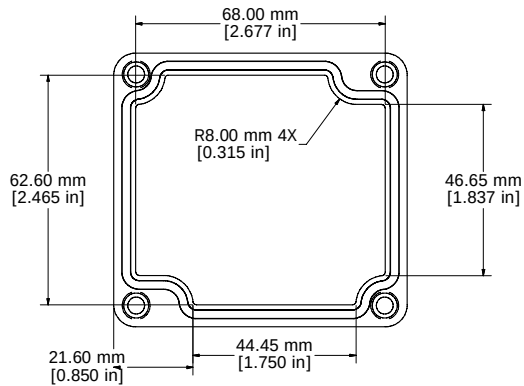


LID - INSIDE

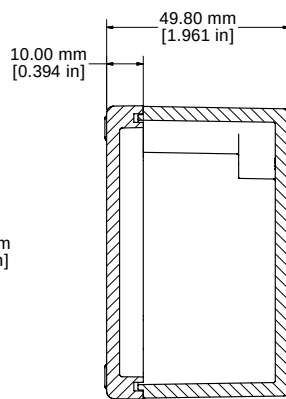

SECTION A-A

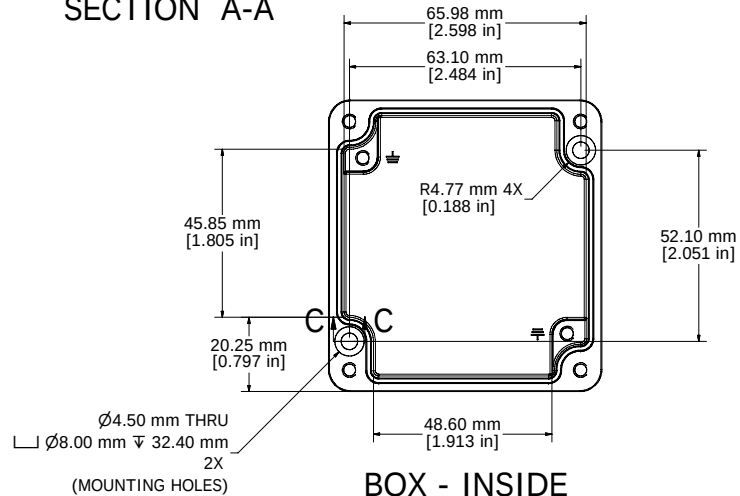


BOX - INSIDE



SECTION C-C

UL US LISTED
File #E65324
NEMA 4, 4X

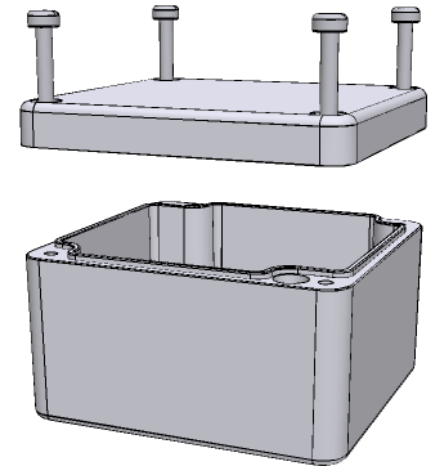

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmgf.com for quotes
Solid models of this enclosure available in STEP or IGES.

NOTES

Purchased assembly includes enclosure, M4x25 lid screws and M4x6 ground screws.

Gasket - Preformed Silicone Rubber

Cover screws should be torqued to 10 lbf-in (120 cN-m)

1590Z110

PART NUMBERS

Basic Enclosure	1590Z110
Black Enclosure	1590Z110BK
Grey Enclosure - RAL7001 Gloss	1590Z110GY



**HAMMOND
MANUFACTURING™**

1590Z110

www.hammondmgf.com