




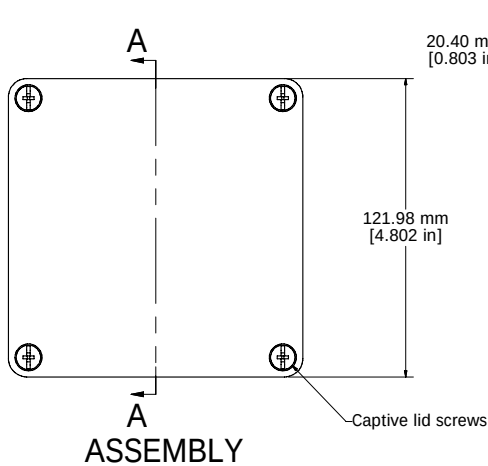



ASSEMBLY

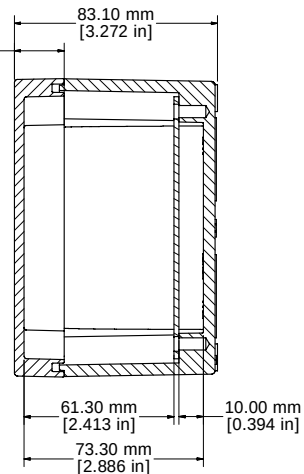


SECTION A-A

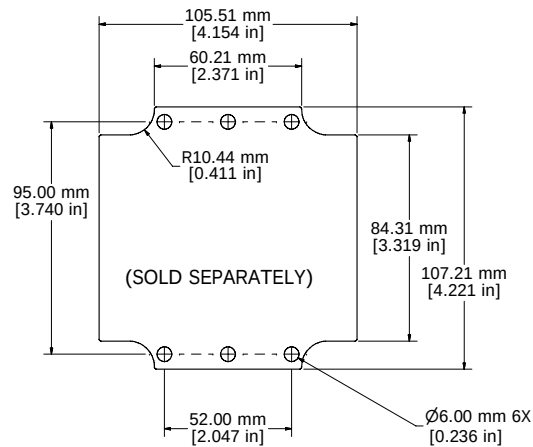


1590Z119PL

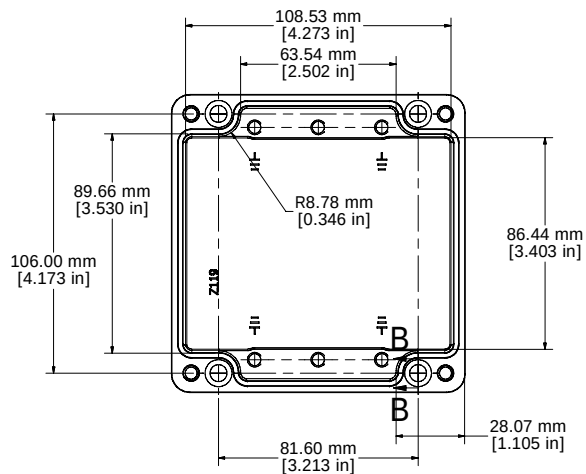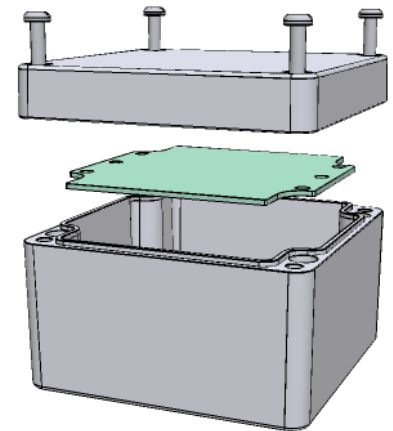

BOX - INSIDE



SECTION B-B

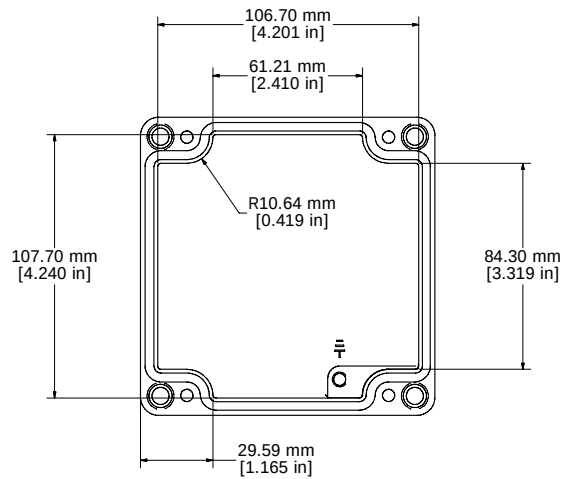

LID - INSIDE

UL US LISTED
File #E65324
NEMA 4, 4X

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmgf.com for quotes
Solid models of this enclosure available in STEP or IGES.

NOTES

Purchased assembly includes enclosure, M6x35 lid screws and M6x10 ground screws.
Gasket - Preformed Silicone Rubber
Cover screws should be torqued to 15-17 lbf.in (150-170 cN.m)

1590Z119

PART NUMBERS

Basic Enclosure	1590Z119
Black Enclosure	1590Z119BK
Grey Enclosure - RAL7001 Gloss	1590Z119GY

ACCESSORIES

Inner Panel	1590Z119PL
-------------	------------



**HAMMOND
MANUFACTURING™**

1590Z119

www.hammondmgf.com