

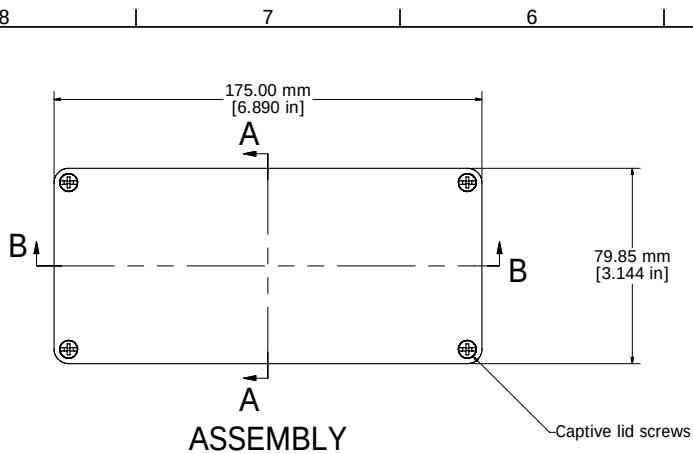
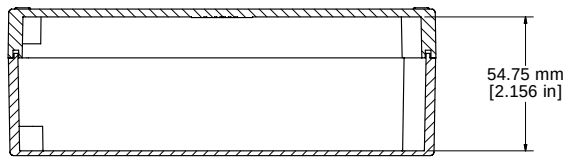



SECTION A-A

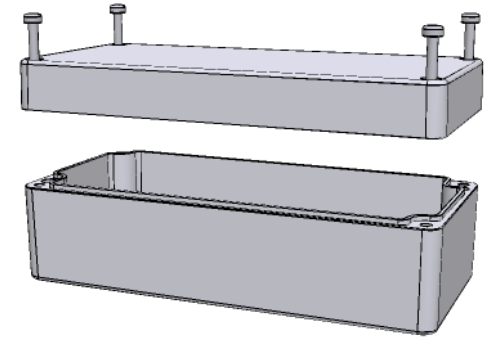


SECTION B-B

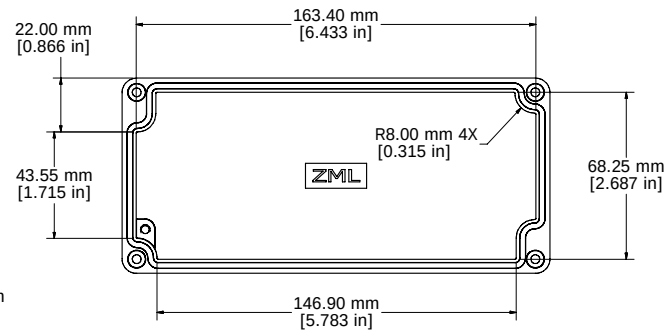

LID - INSIDE

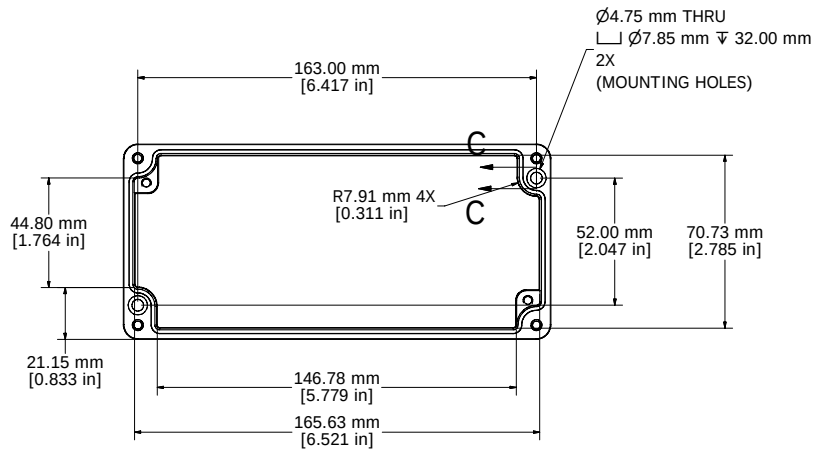

BOX - INSIDE



SECTION C-C

UL US LISTED
File #E65324
NEMA 4, 4X

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmgf.com for quotes
Solid models of this enclosure available in STEP or IGES.

NOTES

Purchased assembly includes enclosure, M4x30 lid screws and M4x6 ground screws.
Gasket - Preformed Silicone Rubber
Cover screws should be torqued to 5-7.5 lbf.in (50-75 cN.m)

1590Z135

PART NUMBERS

Basic Enclosure	1590Z135
Black Enclosure	1590Z135BK
Grey Enclosure - RAL7001 Gloss	1590Z135GY



**HAMMOND
MANUFACTURING™**

1590Z135

www.hammondmgf.com