


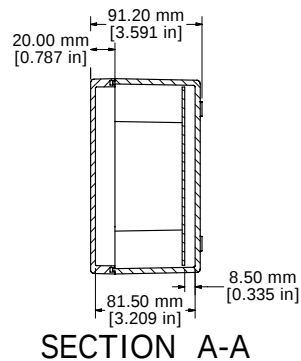
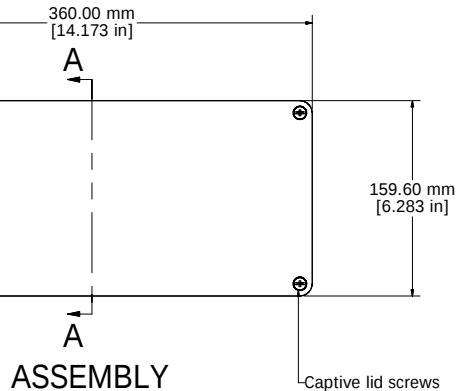
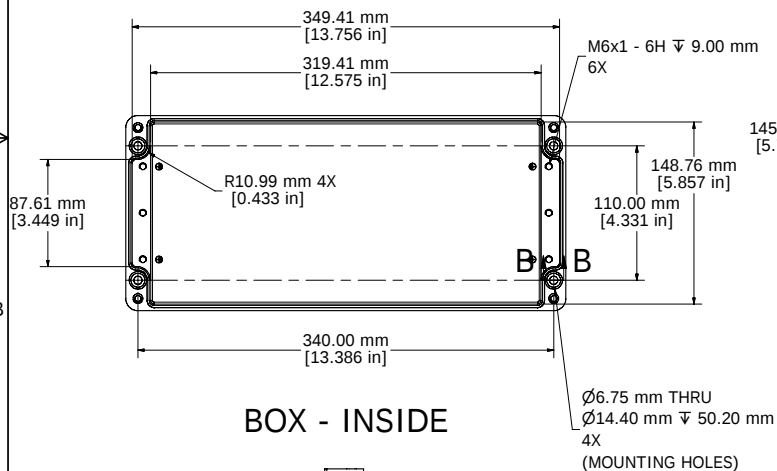
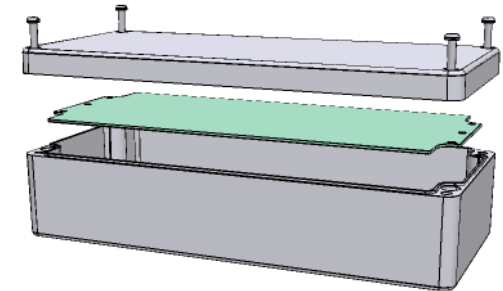


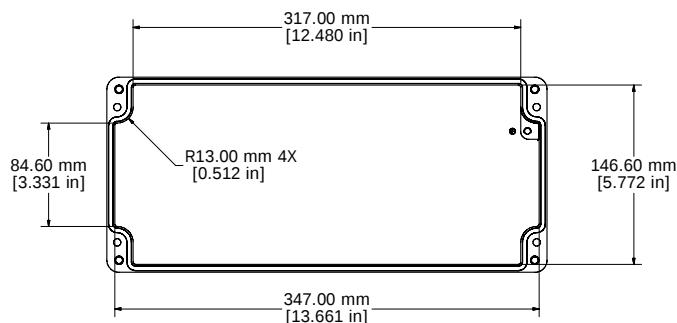

UL US LISTED
File #E65324
NEMA 4, 4X

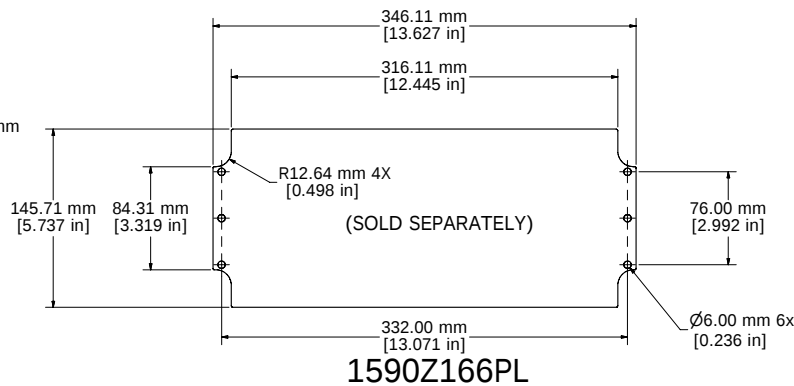

SECTION B-B



Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmfg.com for quotes
Solid models of this enclosure available in STEP or IGES.

NOTES

Purchased assembly includes enclosure, M6x35 lid screws and M6x10 ground screws.

Gasket - Preformed Silicone Rubber

Cover screws should be torqued to 15-17 lbf.in (150-170 cN.m)

1590Z166

PART NUMBERS

Basic Enclosure	1590Z166
Black Enclosure	1590Z166BK
Grey Enclosure - RAL7001 Gloss	1590Z166GY

ACCESSORIES

Inner Panel	1590Z166PL
-------------	------------



**HAMMOND
MANUFACTURING™**

1590Z166

www.hammondmfg.com