
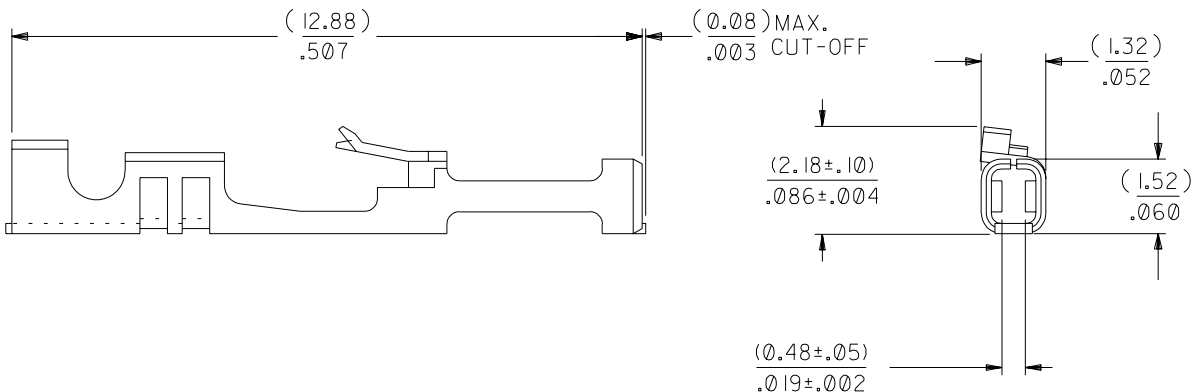




NOTES:

1. TERMINAL TO BE USED IN HOUSINGS 70066-**** AND 70450-****
2. REFER TO PRODUCT SPECIFICATION PS-71851
3. REFER TO MOLEX OPERATIONS AND SERVICE MANUAL FOR CRIMP DETAILS
4. TERMINAL TO BE USED WITH (0.64)/.025 SQUARE PINS
5. TERMINAL TO BE USED WITH 22-24 AWG STRANDED WIRE WITH (1.63)/.064 MAX. DIA. INSULATION
6. TERMINALS SUPPLIED IN REEL FORM

PLATING:

.000015 MINIMUM GOLD PLATE IN SELECT AREA
WITH .000075 MINIMUM TIN PLATE IN SELECT
AREA OVER NICKEL PLATE OVERALL

*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO
RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC".
CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

		B	REVISE PER ECR# U82219 11-07-88 MJM/MGB	DIMENSIONS SHOWN (METRIC) INCH		▽ = 0 ▼ = 0		REVISE ONLY ON CAD SYSTEM	
				UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		TITLE			
				INCH METRIC		TERMINAL-BOX/CRIMP HIGH FORCE CONTACT			
				3 PLACE ± .010 ---					
				2 PLACE ± .014 ± 0.25					
				1 PLACE --- ± 0.35					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					
				DRWG. BY MJM	CHK'D. BY MJM				
				APP'D. BY WAZ	SCALE 10: 1				
</									