

4



3

2


1

used for:

D-SUB HD

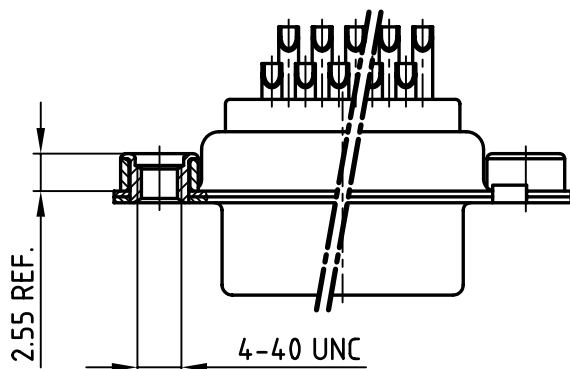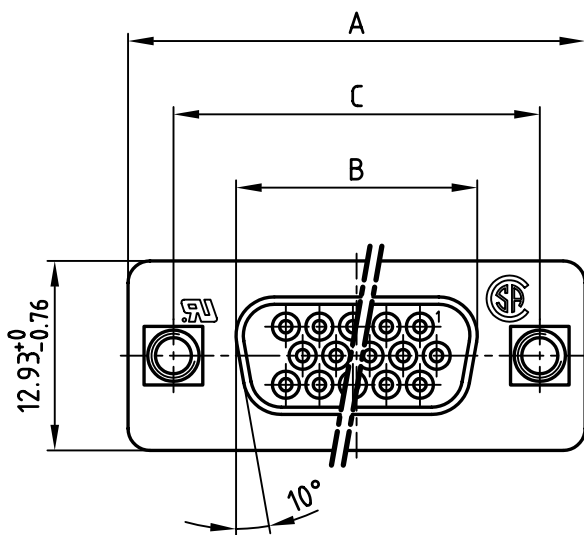

POS.	A -0.76	B -0.25	C	Part NO.
15	31.19	16.46	25.00 $+0.12/-0.13$	164A17059X
26	39.52	24.79	33.30 $+0.15/-0.1$	164A17069X
44	53.42	38.50	47.04 ± 0.13	164A17079X
62	69.70	54.96	63.50 ± 0.13	164A17089X

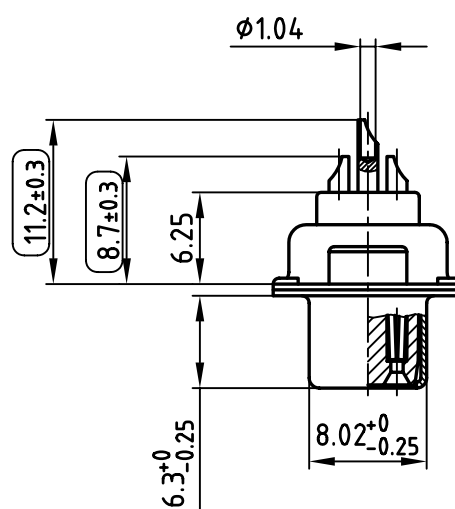

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
SOLDER CUP ACCEPTS CABLE AWG 22
- THREADED INSERT: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
- COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
- = CHECK DIMENSION

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

			tolerance		dim. in mm
rev.	description	date	name		
		2003	date	name	
		drawn	30.07.	Lehmenkühler	
		appd.	30.07.	Mickenbecker	
		norm			
		d-old			

scale:	2:1	
material:	SEE NOTES	
title:	D-SUB HD FEMALE 15-62pos. SOLDER CUP with threaded insert	
dwg no:	AutoCAD 2000	DIN-A
	16K1A989	4
		sh: 1/1
part no:	SEE TABLE	

4

3

2

1