



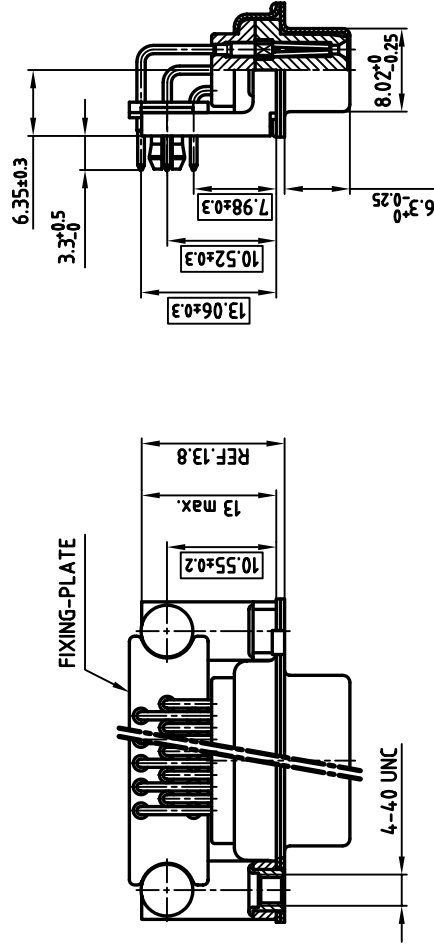

NOTES:

1. METAL SHELLS: STEEL; min. 320 μ " TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
4. PLATING: min. 8 μ " HARD GOLD OVER min. 50 μ " NICKEL
5. METAL BRACKET: STEEL; min. 320 μ " TIN over 80 μ " NICKEL
6. FIXING-PLATE: PBT GF UL 94 V-0, BLACK
7. THREADED INSERT: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
8. PCB-SNAP: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
9. PCB-HOLE: ϕ 3.1 $\pm$ 0.1; PCB THICKNESS 1.6mm
10. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V1IH6B
11. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
12. $\square$ = CRITICAL DIMENSION: SPC

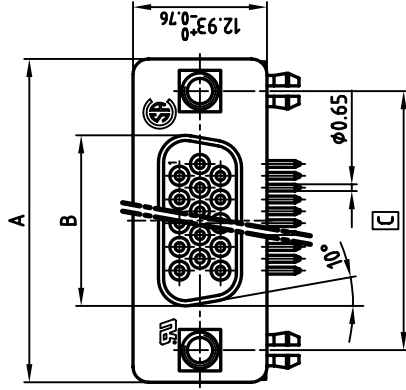

tolerance		scale: 2:1		material: SEE NOTES	
2001		date		name	
drawn		22.11.		Parel	
appd.		22.11.		Resonek	
norm					
d-old					
rev.		description		date	
name					
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.					
OWNERSHIP AND COPYRIGHT OF CONEC GMBH					
DO NOT ALTER CAD DRAWING BY HAND					
title: D-SUB HD FEMALE 90°					
15-62pos. 0.350inch					
threaded insert, metal bracket, fixing-plate, clip					
dwg no: AutoCAD 2000 DIN-A					
16K1A375A					
part no: SEE TABLE					

POS.	A -0.76	B -0.25	C	Part NO.
15	31.19	16.46	25.00 $\pm$ 0.12	164A18179X
26	39.52	24.79	33.30 $\pm$ 0.15	164A18189X
44	53.42	38.50	47.04 $\pm$ 0.13	164A18199X
62	69.70	54.96	63.50 $\pm$ 0.13	164A18209X