


## MKDS 1,5/ 3-5,08 BD:1-3

Order No.: 1715857

The illustration shows a combination as a 15-position version

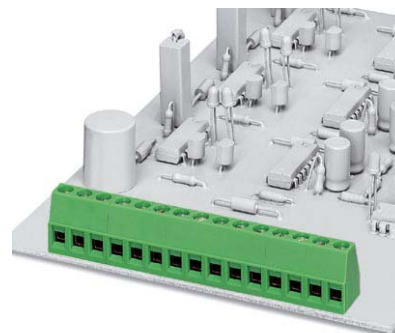

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1715857>

PC terminal block, Nominal current: 17.5 A, Nom. voltage: 250 V, Pitch: 5.08 mm, Number of positions: 3, Type of connection: Screw connection, Assembly: Soldering, Conductor/PCB connection direction: 0 °, Color: green

### Commercial data

|                |               |
|----------------|---------------|
| EAN            | 4017918257903 |
| Pack           | 50 Pcs.       |
| Customs tariff | 85369010      |
| Weight/Piece   | 0.00448 KG    |

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Certificates / Approvals



Certification

CCA, CSA, CUL, SEV, UL

---

**CSA**

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 300 V |
| Nominal current $I_N$ | 10 A  |
| AWG/kcmil             | 28-14 |

**CUL**

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 300 V |
| Nominal current $I_N$ | 10 A  |
| AWG/kcmil             | 30-14 |

**UL**

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 300 V |
| Nominal current $I_N$ | 10 A  |
| AWG/kcmil             | 30-14 |

**Accessories**

| Item            | Designation              | Description                                                                                                                                          |
|-----------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Assembly</b> |                          |                                                                                                                                                      |
| 1702048         | RZ 1,25-MKDS 1,5         | Pitch spacer, for adjusting the pitches between MKDS and GMKDS terminal blocks in mixed rows, 1.25 mm thick                                          |
| <b>General</b>  |                          |                                                                                                                                                      |
| 1733169         | EBP 2- 5                 | Insertion bridge, fully insulated, for plug connectors with 5.0 or 5.08 mm pitch, no. of positions: 2                                                |
| <b>Marking</b>  |                          |                                                                                                                                                      |
| 0804293         | SK 5,08/3,8:FORTL.ZAHLEN | Marker card, printed horizontally, self-adhesive, 12 identical decades marked 1-10, 11-20 etc. up to 91-(99)100, sufficient for 120 terminal blocks  |
| <b>Tools</b>    |                          |                                                                                                                                                      |
| 1205053         | SZS 0,6X3,5              | Screwdriver, bladed, matches all screw terminal blocks up to 4.0 mm <sup>2</sup> connection cross section, blade: 0.6 x 3.5 mm, without VDE approval |

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2008 Phoenix Contact  
Technical modifications reserved;