
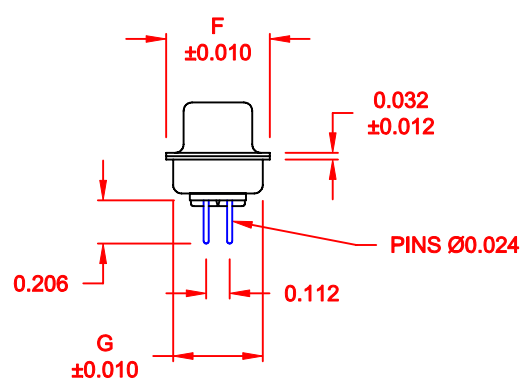


DESCRIPTION: FEMALE - DIP SOLDER / MACHINED - PREMIUM

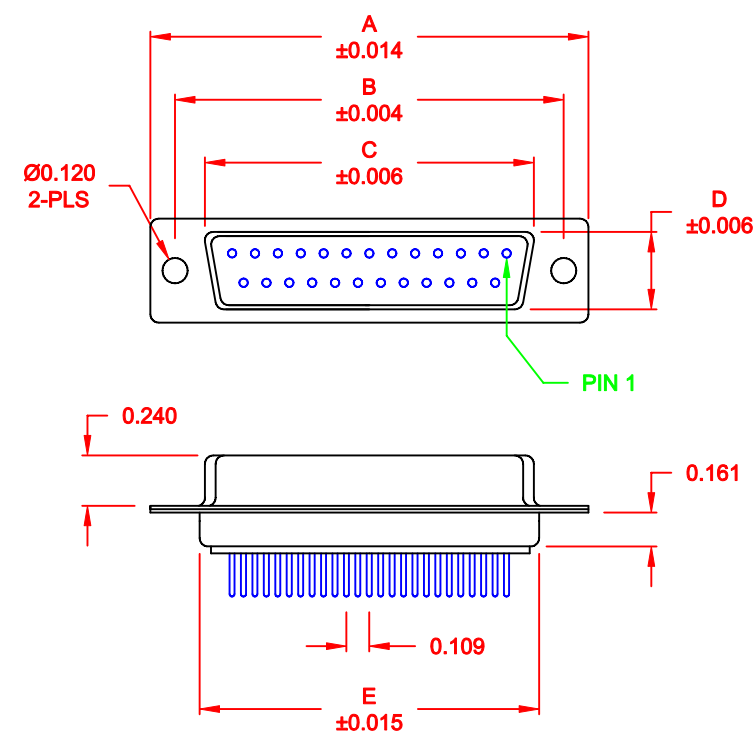

No. OF PINS	DIMENSIONS						
	A	B	C	D	E	F	G
9	1.213	0.984	0.642	0.315	0.760	0.496	0.429
	30.80	24.99	16.30	8.00	19.30	12.60	10.90
15	1.541	1.312	0.969	0.315	1.083	0.496	0.429
	39.15	33.32	24.60	8.00	27.51	12.60	10.90
25	2.088	1.852	1.512	0.315	1.630	0.496	0.429
	53.04	47.04	38.40	8.00	41.40	12.60	10.90
37	2.729	2.500	2.157	0.315	2.276	0.496	0.429
	69.32	63.50	54.80	8.00	57.81	12.60	10.90
50	2.635	2.406	2.059	0.425	2.182	0.602	0.535
	66.93	61.11	52.30	10.80	55.42	15.30	13.60

MATERIAL:

SHELL: STEEL, TIN
INSULATOR: UL 94V-O RATED, BEIGE PBTP
PROCESS TEMP.: 260° C
CONTACT: BRASS

ELECTRICAL:

CURRENT RATING: 5 AMPS
CONTACT RESISTANCE: 15 mOhms Max.
INSULATION RESISTANCE: 1,000 MOhms min.
VOLTAGE: 500VAC FOR 1 MINUTE
TEMPERATURE: -50° C TO 100° C

DO NOT SCALE FROM DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS

CHECKED:

DATE: 09-12-05

DATE:

NorComp

SCALE: 1 : 1

SHEET 1 OF 3

REV 7






DWG NO.

172-YYY-212RYY1

172-YYY-212RYY1

- SERIES _____
POSITIONS _____
009
015
025
037
050
GENDER _____
2 = FEMALE
TERMINATION _____
1 = DIP SOLDER
SHELL PLATING _____
2 = TIN
RoHS COMPLIANT _____
HARDWARE OPTIONS _____
00 = NO HARDWARE
01 = .065" CLINCH NUT (BOARD SIDE)
02 = .250" CLINCH NUT (BOARD SIDE)
03 = .250" CLINCH NUT (MOUNTING SIDE)
05 = .237" 4-40 BOARD LOCK
91 = .237" 4-40 SPACER/ BOARD LOCK
PLATING OPTIONS _____
1 = GOLD FLASH
2 = 30MICRO-INCH GOLD

RoHS COMPLIANT

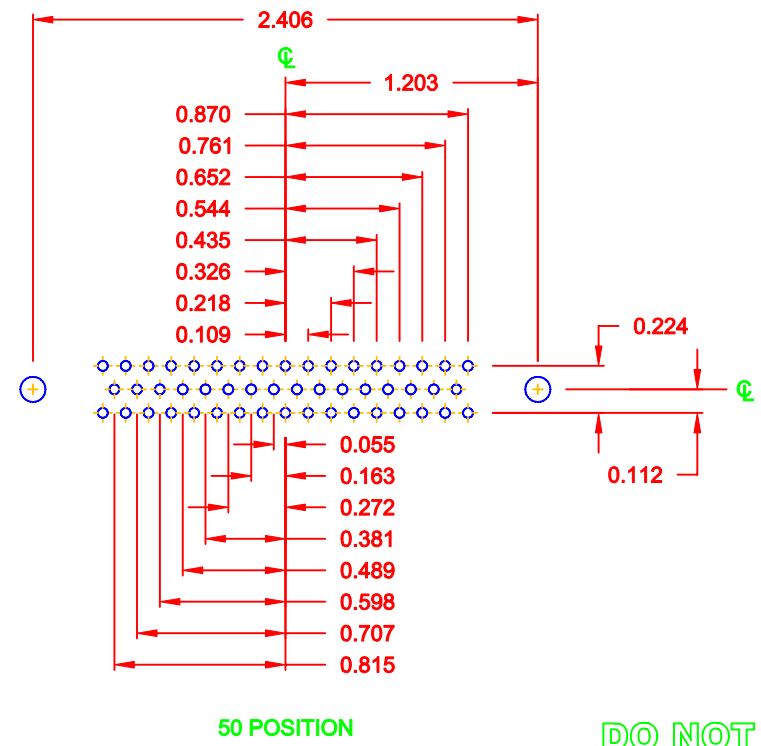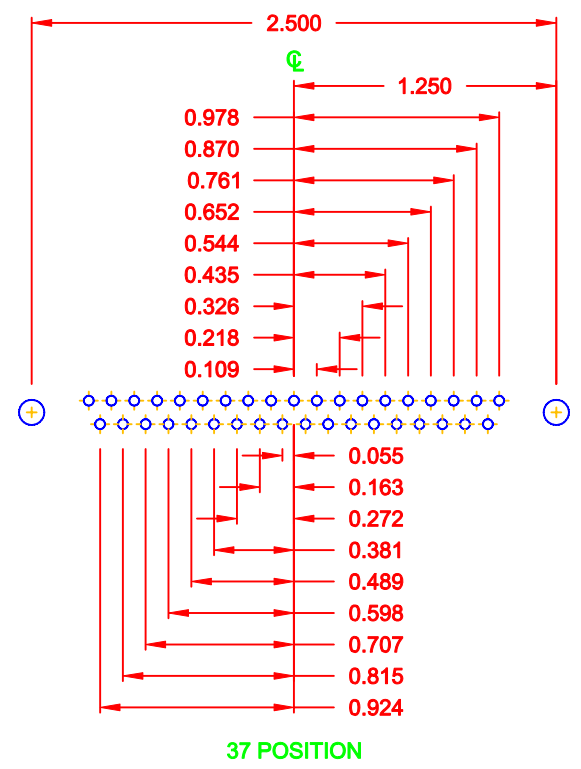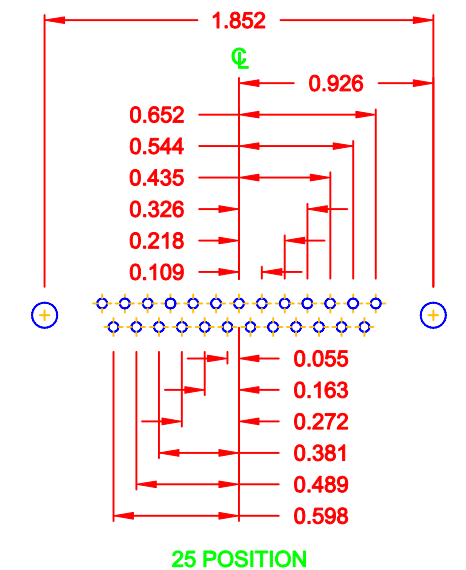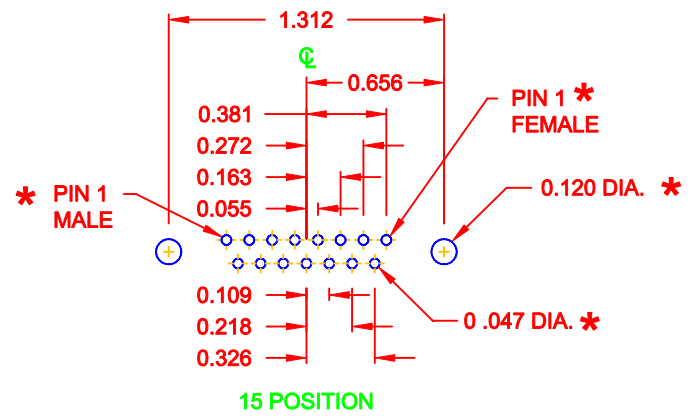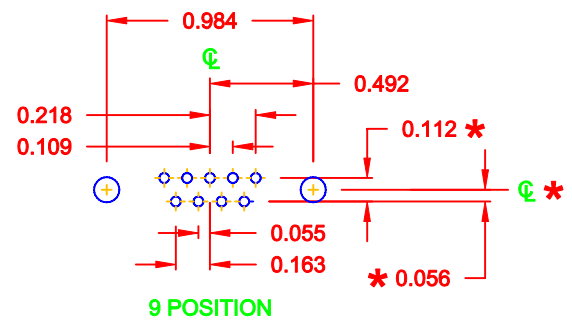

* TYP. ON ALL SIZES

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: C. SMITH		DATE: 03-08-06	
		CHECKED:		DATE:	
NorComp		SCALE: FULL	SHEET 2 OF 3		REV 7
		DWG NO. 172-YYY-212RYY1			

