

HC-B 6-TFL-43/M1PG13,5S

Order No.: 1771118

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1771118>

Sleeve housing, for single locking latch, height 43 mm, with screw connection, 1x Pg13.5, lateral cable entry

Commercial data

EAN	4017918035853
Pack	10 Pcs.
Customs tariff	76169910
Weight/Piece	0.11852 KG
Catalog page information	Page 394 (PC-2007)

Product notes

WEEE/RoHS-compliant since:
01/31/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Note	For contact inserts HC-B6, BB10, DD24, M
Design	B6
Height	43 mm
Width	43 mm
Length	60 mm

Housing type	Sleeve housings
Locking type	for single locking latch
Type of the screw connection	1x Pg13,5
Pg screw connection	With
Wrench size, union nut	20 mm
Cable exit	Lateral
External cable diameter	7.5 mm ... 12.5 mm
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Screw connection material	Nickel-plated brass
Cable seal material	NBR

Certificates / Approvals

Approval logo




requested approbations

Certification	GOST
---------------	------

Drawings

Dimensioned drawing

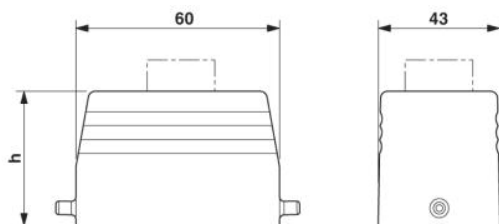

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact
Technical modifications reserved;