

## HC-D 15-AML

Order No.: 1772379

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1772379>

HEAVYCON panel mounting base D15, with single locking latch,  
height 26 mm

### Commercial data

|                          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918037048      |
| Pack                     | 10 Pcs.            |
| Customs tariff           | 76169910           |
| Weight/Piece             | 0.08688 KG         |
| Catalog page information | Page 425 (PC-2007) |

### Product notes

WEEE/RoHS-compliant since:  
03/01/2006



[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

### Technical data

#### General data

|        |                                 |
|--------|---------------------------------|
| Note   | For contact inserts HC-D15, A10 |
| Design | D15                             |
| Height | 26 mm                           |
| Width  | 30.5 mm                         |
| Length | 81 mm                           |

|                                 |                               |
|---------------------------------|-------------------------------|
| Housing type                    | Panel mounting base, straight |
| Locking type                    | With single locking latch     |
| Degree of protection            | IP65                          |
| Ambient temperature (operation) | -40 °C ... 125 °C             |
| Housing material                | Aluminum, die-cast            |
| Housing surface material        | Powder-coated, gray           |
| Seal material                   | NBR                           |
| Locking latch material          | Steel, galvanized             |
| Length of the assembly cutout   | 58 mm                         |
| Width of the assembly cutout    | 24 mm                         |

#### Certificates / Approvals

Approval logo




#### requested approbations

|               |      |
|---------------|------|
| Certification | GOST |
|---------------|------|

#### Drawings

Dimensioned drawing

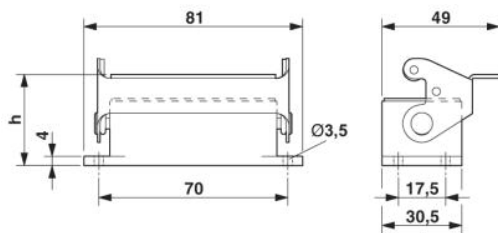

**Address**

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 00  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



© 2008 Phoenix Contact  
Technical modifications reserved;