
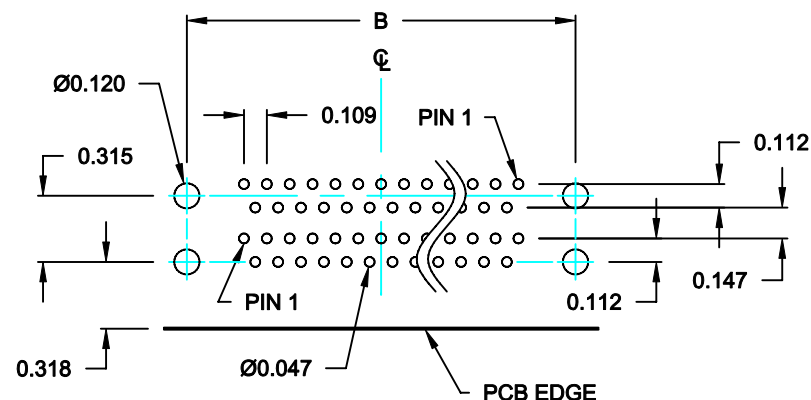
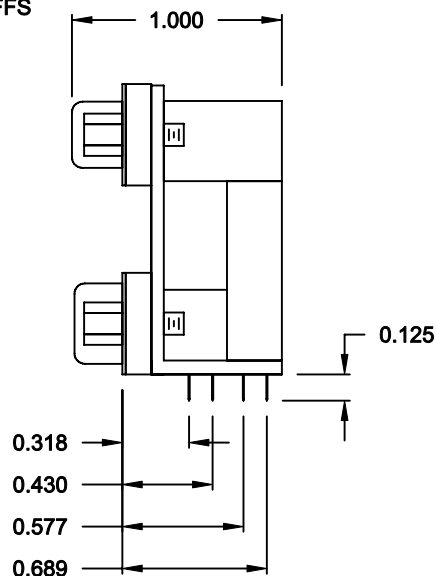


	DIMENSIONS (IN.)			
	9	15	25	37
A	1.204	1.535	2.078	2.724
B	0.984	1.312	1.850	2.500
C	0.494	0.494	0.494	0.494

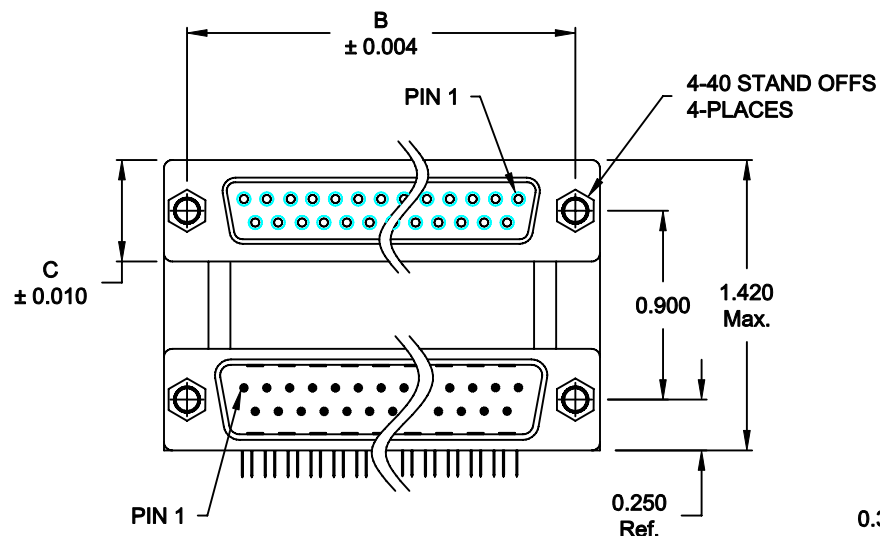

SPECIFICATION:

SHELL: STEEL, NICKEL PLATED
INSULATOR: UL 94V-0 RATED, BLACK PA9T,
260° PROCESS TEMP.
CONTACTS: BRASS
CONTACT PLATING: GOLD PLATED ENTIRE CONTACT

INSULATOR RESISTANCE: 1,000 Ohms Min.
DIELECTRIC STRENGTH: 1,000VAC RMS
CURRENT RATING: 5 AMPS
OPERATING TEMPERATURE: -55° C TO 105° C

179-YYY-313R481

SERIES

POSITIONS

009

015

025

037

GENDER

31 = FEMALE OVER MALE

41 = MALE OVER FEMALE

51 = FEMALE OVER FEMALE

61 = MALE OVER MALE

SHELL PLATING

3 = NICKEL

RoHS COMPLIANT (HIGH TEMP. PROCESS)

HARDWARE OPTIONS

48 = 4-40 STAND OFFS/METAL BRACKET

PLATING OPTIONS

1 = GOLD FLASH

DO NOT SCALE FROM DRAWING



DRAWN: C. SMITH

DATE:	03-30-07
-------	----------

CHECKED:

DATE:

SCALE:

SCALE:	SHEET	OF	REV
1:1	1	1	3

DWG NO.

179-YYY-313R481

NorComp

RoHS COMPLIANT