


	DIMENSIONS (IN.)			
	9	15	25	37
A	1.204	1.535	2.078	2.724
B	0.984	1.312	1.850	2.500
C	0.494	0.494	0.494	0.494

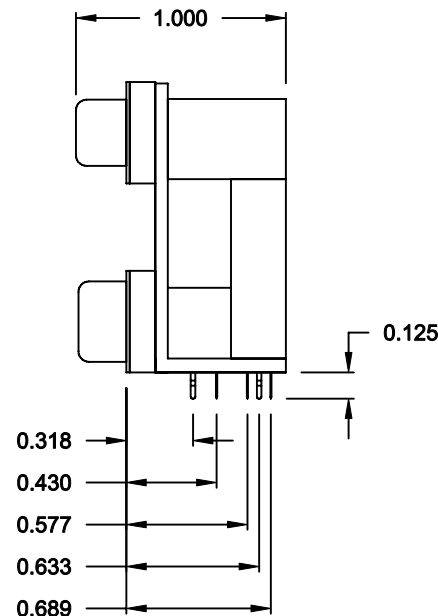

RoHS COMPLIANT

MATERIAL:
SHELL: STEEL, NICKEL PLATED
INSULATOR: UL 94V-0 RATED, BLACK PA9T,
260° PROCESS TEMP.
CONTACTS: BRASS
CONTACT PLATING: GOLD PLATED ENTIRE CONTACT

INSULATOR RESISTANCE: 1,000 Ohms Min.
DIELECTRIC STRENGTH: 1,000VAC RMS
CURRENT RATING: 5 AMPS
OPERATING TEMPERATURE: -55° C TO 105° C

179-YYY-313R691

SERIES _____

POSITIONS _____

009
015
025
037

GENDER _____

31 = FEMALE OVER MALE
41 = MALE OVER FEMALE
51 = FEMALE OVER FEMALE
61 = MALE OVER MALE

SHELL PLATING _____

3 = NICKEL

RoHS COMPLIANT (HIGH TEMP. PROCESS) _____

HARDWARE OPTIONS _____

69 = 4-40 INSERTS/BOARD LOCKS (REAR)

PLATING OPTIONS _____

1 = GOLD FLASH

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF NorComp AND
SHALL NOT BE REPRODUCED, COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OF SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH

DATE:	03-30-07
-------	----------

CHECKED:

DATE:

SCALE:

SHEET	OF
1	

REV
3

DWG NO.

179-YYY-313R691

NorComp