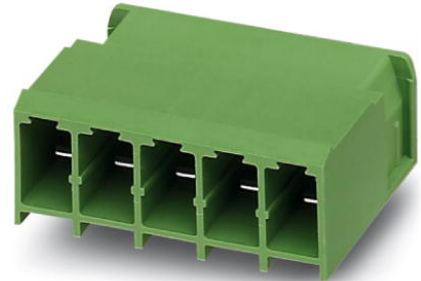


PC 4/ 4-G-7,62

Order No.: 1804810

The figure shows a 5-pos. version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1804810>

Header, nominal current: 20 A, rated voltage: 400 V, pitch: 7.62 mm,
no. of positions: 4, mounting: Soldering

Commercial data

| | |
|--------------------------|--------------------|
| EAN | 4017918046255 |
| Pack | 50 Pcs. |
| Customs tariff | 85366990 |
| Weight/Piece | 0.00931 KG |
| Catalog page information | Page 326 (CC-2007) |

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

| | |
|---------------------|------------|
| Pitch | 7.62 mm |
| Dimension a | 22.86 mm |
| Number of positions | 4 |
| Pin dimensions | 1 x 0,8 mm |
| Hole diameter | 1.3 mm |

Technical data

| | |
|------------------------------------|--------|
| Insulating material group | IIIa |
| Rated surge voltage (III/3) | 6 kV |
| Rated surge voltage (III/2) | 6 kV |
| Rated surge voltage (II/2) | 6 kV |
| Rated voltage (III/2) | 630 V |
| Rated voltage (II/2) | 630 V |
| Connection in acc. with standard | EN-VDE |
| Nominal current I_N | 20 A |
| Nominal voltage U_N | 400 V |
| Maximum load current | 20 A |
| Insulating material | PBT |
| Inflammability class acc. to UL 94 | V0 |

Certificates / Approvals



CSA

| | |
|-----------------------|-------|
| Nominal voltage U_N | 300 V |
| Nominal current I_N | 20 A |

CUL

| | |
|-----------------------|-------|
| Nominal voltage U_N | 300 V |
| Nominal current I_N | 35 A |

UL

| | |
|-----------------------|---|
| Nominal voltage U_N | 300 V |
| Nominal current I_N | 35 A |
| Certification | BV, CSA, CUL, DNV, GL, GOST, LR, RS, UL |

Accessories

| Item | Designation | Description |
|------|-------------|-------------|
|------|-------------|-------------|

Assembly

| | | |
|---------|---------|---|
| 1827570 | BF-PC 4 | Mounting flange, is snapped onto the left and right of the headers, for screw connection with PC 4/...-STF-7.62 |
|---------|---------|---|

Marking

| | | |
|---------|--------------------------|---|
| 1051993 | B-STIFT | Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm |
| 0804549 | SK 7,62/3,8:FORTL.ZAHLEN | Marker card, printed horizontally, self-adhesive, 10-section marker strip, 12 identical decades marked 1-10, 11-20 etc. up to 91-99, sufficient for 120 terminal blocks |
| 0805153 | SK 7,62/3,8:SO | Marker card, special printing, self-adhesive, labeled acc. to customer requirements, 12 identical marker strips per card, max. 25-position labeling per strip, color: white |
| 0803906 | SK U/3,8 WH:UNBEDRUCKT | Unprinted marker cards, DIN A4 format, pitch as desired, self-adhesive, with 40 stamped marker strips, 185 mm strip length, can be labeled with the CMS system or manually with the M-PEN |


Plug/Adapter

| | | |
|---------|----------|---|
| 1600027 | CP-HCC 4 | Coding profile, is inserted into the slot on the plug and header, red insulating material |
|---------|----------|---|


Additional products

| Item | Designation | Description |
|----------------|---------------------|--|
| General | | |
| 1848915 | PC 4 HV/ 4-ST-7,62 | Plug component, nominal current: 20 A, rated voltage: 800 V, pitch: 7.62 mm, no. of positions: 4, type of connection: Screw connection |
| 1882395 | PC 4 HV/ 4-STF-7,62 | Plug component, nominal current: 20 A, rated voltage: 800 V, pitch: 7.62 mm, no. of positions: 4, type of connection: Screw connection |
| 1804920 | PC 4/ 4-ST-7,62 | Plug component, nominal current: 20 A, rated voltage: 400 V, pitch: 7.62 mm, no. of positions: 4, type of connection: Screw connection |
| 1828265 | PC 4/ 4-STF-7,62 | Plug component, nominal current: 20 A, rated voltage: 400 V, pitch: 7.62 mm, no. of positions: 4, type of connection: Screw connection |
| 1840175 | PCC 4/ 4-ST-7,62 | Plug component, nominal current: 20 A, rated voltage: 400 V, pitch: 7.62 mm, no. of positions: 4, type of connection: Crimp connection |


Drawings

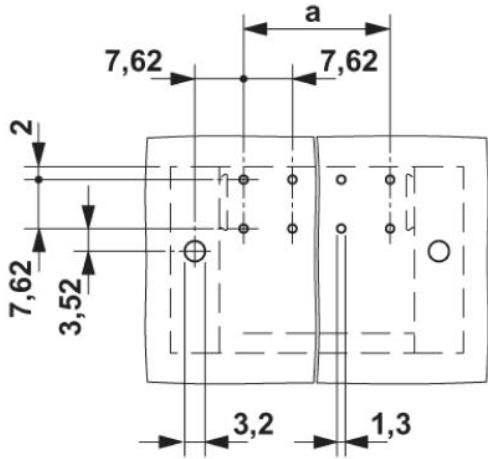

The illustration shows the derating curve for plugs PC 5/...-CT 3.00 in combination with header PC 4/...-CT 3.00.

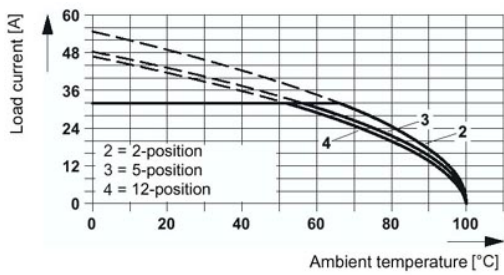

The illustration shows the derating curve for plugs PC 5/...-ST-7,62 in combination with header PC 4/...-G-7,62.

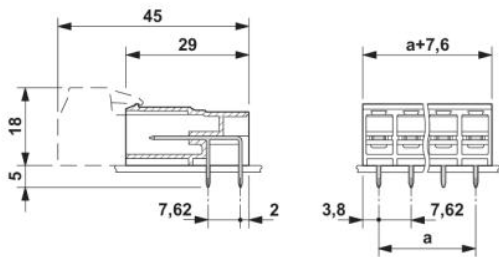

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2008 Phoenix Contact
Technical modifications reserved;