REV.	DATE	DESCRIPTION
NC	08/17/02	INITIAL RELEASE

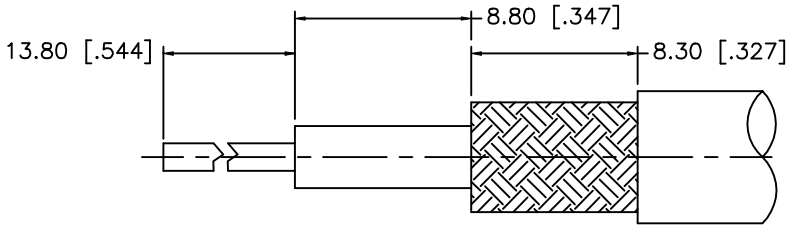

RECOMMENDED CABLE
STRIPPING DIM'S

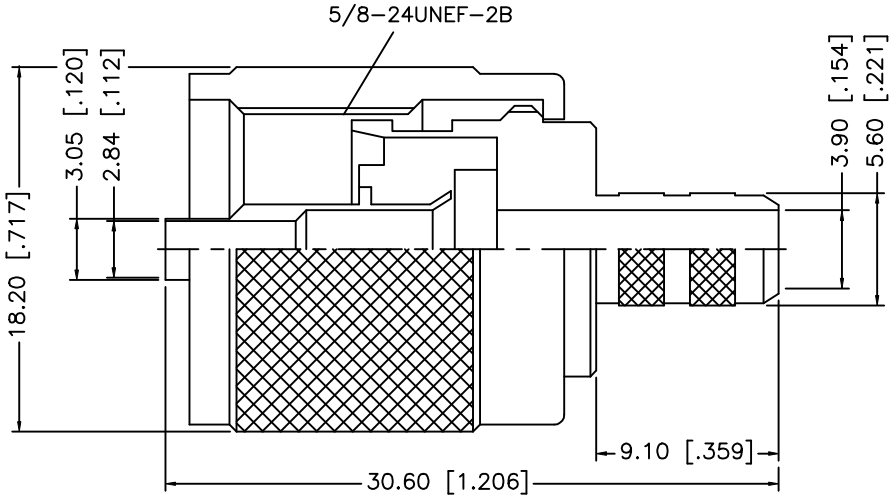

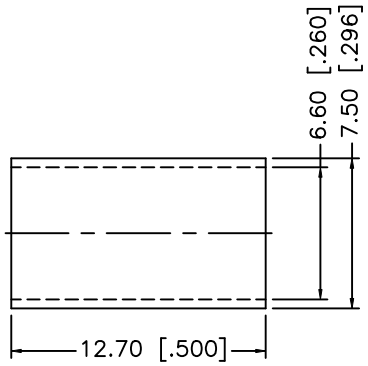

8			
7			
6			
5			
4	FERRULE	COPPER	NICKEL
3	CONTACT PIN	BRASS	GOLD
2	INSULATOR	PHENOLIC	YELLOW
1	BODY/SHELL	BRASS	NICKEL
	DESCRIPTION	MATERIAL	FINISH

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS

DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERANCE ONLY

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.XXX = ± 0.005"
.XX = ± 0.010"
.X = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	G.R.S.	08/17/02
CHECKED		
ISSUED		

Amphenol - Connex
CONNECTOR CORPORATION

TITLE
UNF CRIMP PLUG
(FOR RG–59/U CABLE)

SIZE	FSCM NO.	DWG. NO.	REV.
A	99001	182101.DWG	NC

SCALE	PART NO.	SHEET
NA	182101	1 OF 1