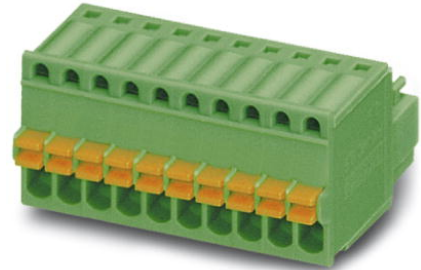


## FK-MC 0,5/10-ST-2,5

Order No.: 1881406

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1881406>

Plug, nominal current: 4 A, rated voltage: 100 V, pitch: 2.5 mm,  
number of positions: 10, connection method: Spring-cage connection

### Commercial data

|                          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918156657      |
| Pack                     | 50 Pcs.            |
| Customs tariff           | 85366990           |
| Weight/Piece             | 0.006216 KG        |
| Catalog page information | Page 120 (CC-2007) |

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Dimensions / positions

|                     |         |
|---------------------|---------|
| Pitch               | 2.5 mm  |
| Dimension a         | 22.5 mm |
| Number of positions | 10      |

#### Technical data

|                                    |                                                        |
|------------------------------------|--------------------------------------------------------|
| Insulating material group          | I                                                      |
| Rated surge voltage (III/3)        | 1.5 kV                                                 |
| Rated surge voltage (III/2)        | 2.5 kV                                                 |
| Rated surge voltage (II/2)         | 2.5 kV                                                 |
| Rated voltage (III/2)              | 160 V                                                  |
| Rated voltage (II/2)               | 320 V                                                  |
| Connection in acc. with standard   | EN-VDE                                                 |
| Nominal current $I_N$              | 4 A                                                    |
| Nominal voltage $U_N$              | 100 V                                                  |
| Nominal cross section              | 0.5 mm <sup>2</sup>                                    |
| Maximum load current               | 4 A (with 0.5 mm <sup>2</sup> conductor cross section) |
| Insulating material                | PA                                                     |
| Inflammability class acc. to UL 94 | V0                                                     |
| Stripping length                   | 8 mm                                                   |

#### Connection data

|                                                                            |                      |
|----------------------------------------------------------------------------|----------------------|
| Conductor cross section solid min.                                         | 0.14 mm <sup>2</sup> |
| Conductor cross section solid max.                                         | 0.5 mm <sup>2</sup>  |
| Conductor cross section stranded min.                                      | 0.14 mm <sup>2</sup> |
| Conductor cross section stranded max.                                      | 0.5 mm <sup>2</sup>  |
| Conductor cross section stranded, with ferrule without plastic sleeve min. | 0.25 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 0.5 mm <sup>2</sup>  |
| Conductor cross section AWG/kcmil min.                                     | 26                   |
| Conductor cross section AWG/kcmil max                                      | 20                   |

#### Certificates / Approvals



#### CUL

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 125 V |
| Nominal current $I_N$ | 4 A   |
| AWG/kcmil             | 28-20 |

## UL

|                       |                            |
|-----------------------|----------------------------|
| Nominal voltage $U_N$ | 125 V                      |
| Nominal current $I_N$ | 4 A                        |
| AWG/kcmil             | 28-20                      |
| Certification         | CB, CUL, GOST, UL, VDE-PZI |

## Accessories

| Item           | Designation              | Description                                                                                                                                                              |
|----------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Marking</b> |                          |                                                                                                                                                                          |
| 0804853        | SK 2,54/2,8:FORTL.ZAHLEN | Marker card, printed horizontally, self-adhesive, 10-section marker strip, 14 identical decades marked 1-10, 11-20 etc. up to 91-100, sufficient for 140 terminal blocks |

## Tools


|         |             |                                                                                                                                                   |
|---------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| 1205202 | SZS 0,4X2,0 | Screwdriver, bladed, matches all screw terminal blocks up to 1.5 mm <sup>2</sup> connection cross section, blade width: 2.5 mm, without approvals |
|---------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------|

## Additional products

| Item           | Designation        | Description                                                                                                 |
|----------------|--------------------|-------------------------------------------------------------------------------------------------------------|
| <b>General</b> |                    |                                                                                                             |
| 1881529        | MC 0,5/10-G-2,5    | Header, nominal current: 4 A, rated voltage: 80 V, pitch: 2.5 mm, no. of positions: 10, mounting: Soldering |
| 1894888        | MCD 0,5/10-G1-2,5  | Header, nominal current: 4 A, rated voltage: 80 V, pitch: 2.5 mm, no. of positions: 10, mounting: Soldering |
| 1894998        | MCDV 0,5/10-G1-2,5 | Header, nominal current: 4 A, rated voltage: 80 V, pitch: 2.5 mm, no. of positions: 10, mounting: Soldering |
| 1881639        | MCV 0,5/10-G-2,5   | Header, nominal current: 4 A, rated voltage: 80 V, pitch: 2.5 mm, no. of positions: 10, mounting: Soldering |

## Drawings

### Dimensioned drawing

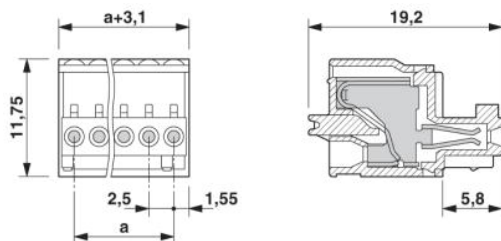

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2008 Phoenix Contact  
Technical modifications reserved;