
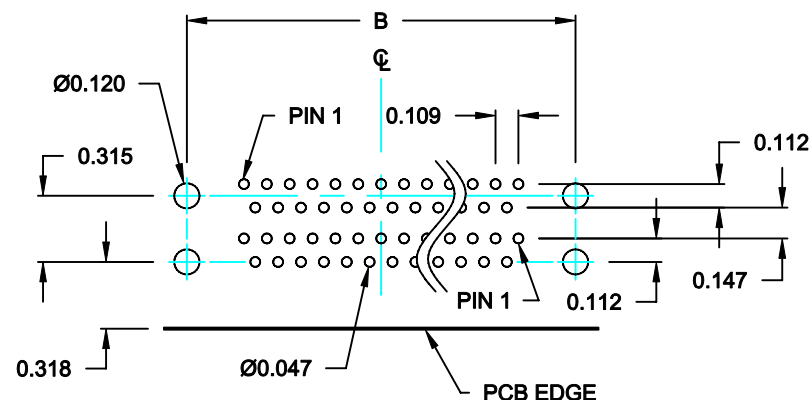
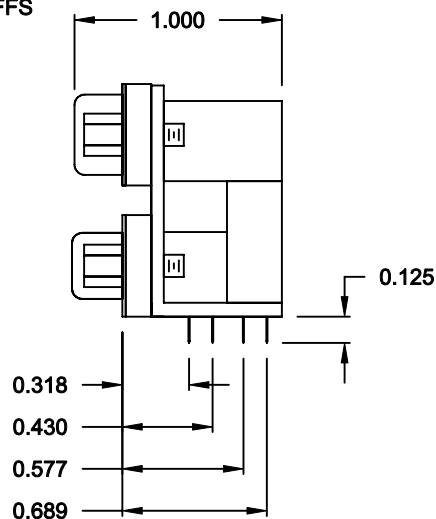


|   | DIMENSIONS (IN.) |       |       |       |
|---|------------------|-------|-------|-------|
|   | 9                | 15    | 25    | 37    |
| A | 1.204            | 1.535 | 2.078 | 2.724 |
| B | 0.984            | 1.312 | 1.850 | 2.500 |
| C | 0.494            | 0.494 | 0.494 | 0.494 |

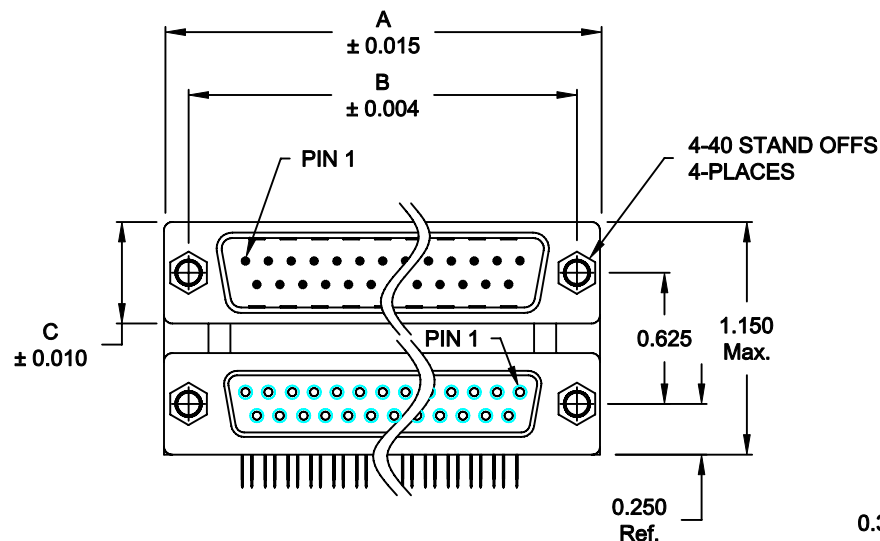

**SPECIFICATION:**

SHELL: STEEL, NICKEL PLATED  
INSULATOR: UL 94V-0 RATED, BLACK PA9T,  
260° PROCESS TEMP.  
CONTACTS: BRASS  
CONTACT PLATING: GOLD PLATED ENTIRE CONTACT

INSULATOR RESISTANCE: 1,000 Ohms Min.  
DIELECTRIC STRENGTH: 1,000VAC RMS  
CURRENT RATING: 5 AMPS  
OPERATING TEMPERATURE: -55° C TO 105° C

189-YYY-413R481

1 = GOLD FLASH

**DO NOT SCALE FROM DRAWING**



THESE DRAWINGS AND SPECIFICATIONS  
ARE THE PROPERTY OF NorComp AND  
SHALL NOT BE REPRODUCED, COPIED  
OR USED AS THE BASIS FOR THE  
MANUFACTURE OF SALE OF APPARATUS  
WITHOUT WRITTEN PERMISSION.

DRAWN:  
**C. SMITH**

|       |          |
|-------|----------|
| DATE: | 04-03-07 |
|-------|----------|

CHECKED:

DATE:

SCALE:

1:1

|       |    |
|-------|----|
| SHEET | OF |
| 1     |    |

REV  
3

DWG NO.

189-YYY-413R481

# NorComp

# RoHS COMPLIANT