
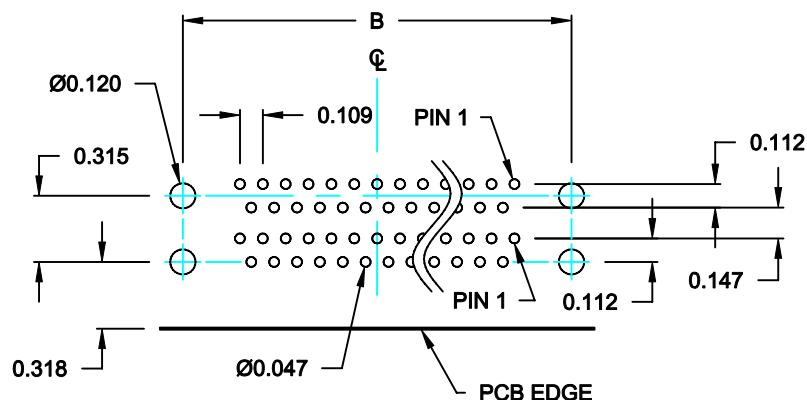
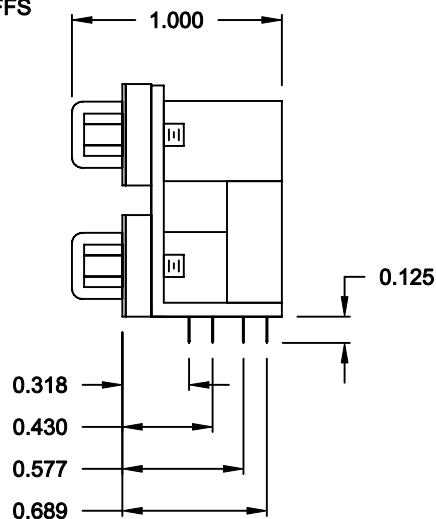


	DIMENSIONS (IN.)			
	9	15	25	37
A	1.204	1.535	2.078	2.724
B	0.984	1.312	1.850	2.500
C	0.494	0.494	0.494	0.494

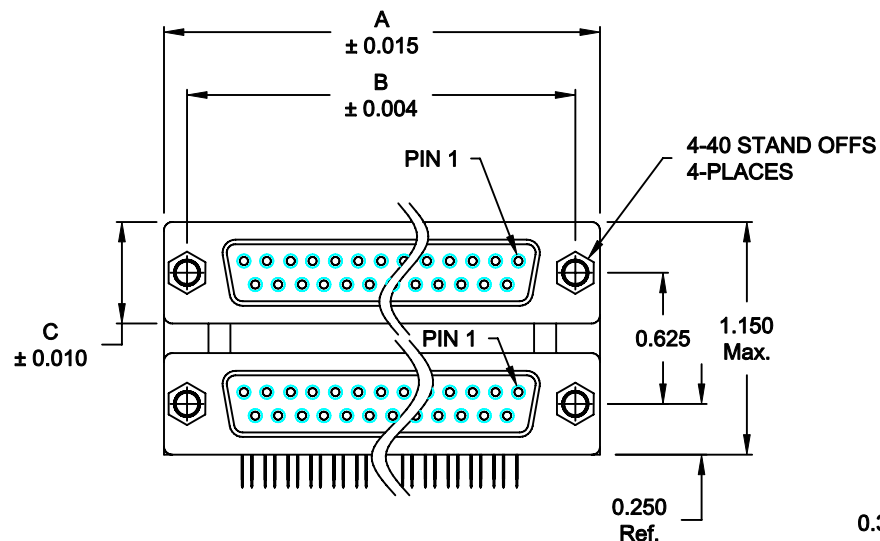

SPECIFICATION:

MATERIAL:

SHELL: STEEL, NICKEL PLATED

**INSULATOR: UL 94V-0 RATED, BLACK PA9T,
260° PROCESS TEMP.**

CONTACTS: BRASS

CONTACT PLATING: GOLD PLATED ENTIRE CONTACT

ELECTRICAL:

INSULATOR RESISTANCE: 1,000 Ohms Min.

DIELECTRIC STRENGTH: 1,000VAC RMS

CURRENT RATING: 5 AMPS

OPERATING TEMPERATURE: -55° C TO 105° C

189-YYY-513R481

SERIES

POSITIONS

009

015

025

037

GENDER

31 = FEMALE OVER MALE

41 = MALE OVER FEMALE

51 = FEMALE OVER FEMALE

61 = MALE OVER MALE

SHELL PLATING

3 = NICKEL

RoHS COMPLIANT (HIGH TEMP. PROCESS)

HARDWARE OPTIONS

48 = 4-40 STAND OFFS/METAL BRACKET

PLATING OPTIONS

1 = GOLD FLASH

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF NorComp AND
SHALL NOT BE REPRODUCED, COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OF SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH	DATE: 11/11/2011
---------------------------	---------------------

DATE:	04-02-07
-------	----------

CHECKED:

DATE:

SCALE:

1 : 1

SHEET	OF
1	

REV
3

DWG NO.

189-YYY-513R481

NorComp

RoHS COMPLIANT