

ZEC 1,5/ 6-LPV-5,0 C2

Order No.: 1898305

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1898305>

Plug component, nominal current: 10 A, rated voltage: 250 V, pitch:
5.0 mm, no. of positions: 6

Commercial data

EAN	4017918167011
Pack	50 Pcs.
Customs tariff	85366990
Weight/Piece	0.00538 KG
Catalog page information	Page 267 (CC-2007)

Product notes

WEEE/RoHS-compliant since:
01/01/2003



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Pitch	5 mm
Dimension a	30 mm
Number of positions	6

Technical data

Insulating material group	I
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	320 V
Rated voltage (II/2)	630 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	10 A
Nominal voltage U_N	250 V
Maximum load current	10 A
Insulating material	PA
Inflammability class acc. to UL 94	V0

Certificates / Approvals

Approval logo



CUL

Nominal voltage U_N	300 V
Nominal current I_N	10 A


UL

Nominal voltage U_N	300 V
Nominal current I_N	10 A
Certification	CB, CUL, UL, VDE-PZI

Drawings


Drilling diagram

Size of the PCB: 1.6 ± 0.2 mm

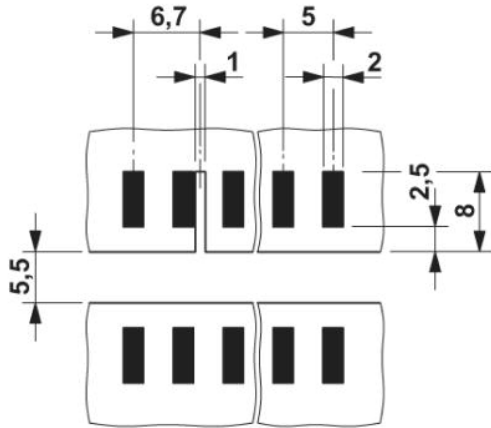


Diagram

Plug: ZEC 1,5/6-LPV-5,0 C2

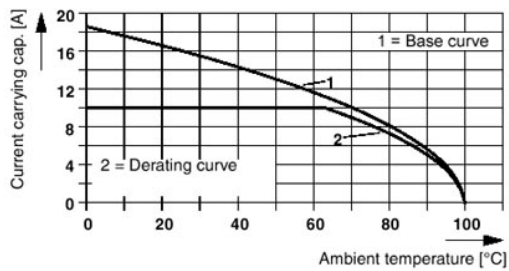

Dimensioned drawing

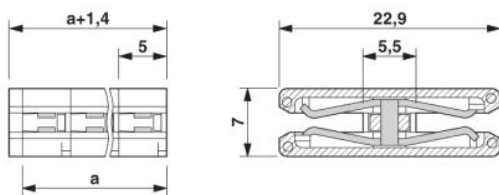

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact
Technical modifications reserved;