
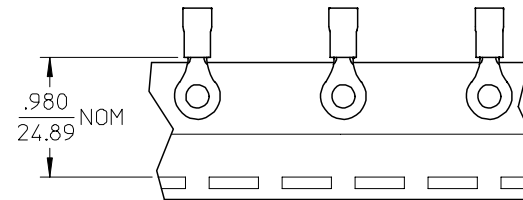


	10	9	8	7	6	5	4	3	2	19073	
	MATERIAL NUMBER	ENG. NO.	MATERIAL NUMBER TAPE MOUNTED	ENG. NO.	STUD SIZE	"S" ±.005	"W" MAX	"C" MIN	"L" MAX		
F	190730179	C-830-10	190730180	C-830-10T	10	.198 (5.03)	.540 (13.72)	.393 (9.98)	1.258 (31.95)		
	190730188	C-830-14	190730190	C-830-14T	14	.265 (6.73)					
	190730200	C-830-56	190730201	C-830-56T	56	.328 (8.33)					
	190730212	C-836-04	190730213	C-836-04T	04	.119 (3.02)					
E	190730216	C-836-06	190730218	C-836-06T	06	.146 (3.71)	.292 (7.42)	.306 (7.77)	1.047 (26.59)		
	190730222	C-836-08	190730224	C-836-08T	08	.173 (4.39)					
	190730227	C-840-10	190730228	C-840-10T	10	.198 (5.03)	.602 (15.29)	.466 (11.83)	1.362 (34.59)		
	190730231	C-840-14	190730232	C-840-14T	14	.265 (6.73)					
	190730236	C-840-38	190730237	C-840-38T	38	.390 (9.91)					
	190730242	C-840-56	190730243	C-840-56T	56	.328 (8.33)					

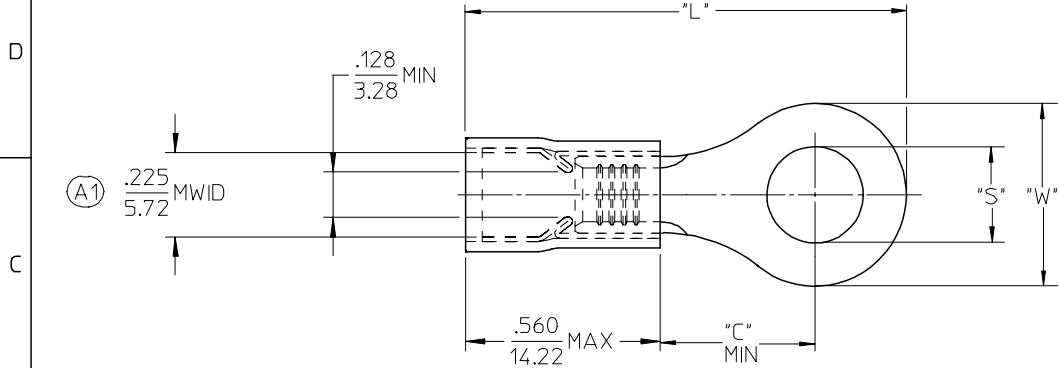

SALES DRAWING

- NOTES:
1. MATERIAL: COPPER (.040/1.02) THICK.
PLATING: ELECTROPLATE TIN
 2. FERRULE: TIN PLATED BRASS
 3. INSULATION: YELLOW NYLON
 4. MWID=MAXIMUM WIRE INSULATION DIA.
 5. ALL DIMENSIONS IN INCHES (MM).
 6. WIRE SIZE: 12-10 AWG
4.0-6.0 MM²

EC NO: ETC2006-0152 DRWN: ASAYDEH 2005/12/12 CHKD: JLOMASTR 2005/12/13 APPR: RDEROSS 2005/12/14	QUALITY SYMBOLS DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± 0.13 ± .01 1 PLACE ± 0.25 ± --- ANGULAR ± 1 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SCALE 4:1 DESIGN UNITS INCH DIMENSION STYLE IN/MM DRAWN BY DMYRICK DATE 03/12/15 CHECKED BY SBEITZEL DATE 03/12/15 APPROVED BY RDEROSS DATE 03/12/15	THIRD ANGLE PROJECTION REVISE ON CAD ONLY TITLE RING TONGUE TERMINAL AVIKRIMP, 800-SERIES 12-10 AWG MOLEX INCORPORATED MATERIAL NO. SEE CHART DOCUMENT NO. SD-19073-008 SHEET NO. 1 OF 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	B