

## PST 1,3/15-5,0

Order No.: 1933312

The figure shows a 10-position version of the product

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1933312>

Pin strip, 5.0 mm pitch, for use with compact PCB terminal blocks,  
color: black

### Commercial data

|                          |                    |
|--------------------------|--------------------|
| EAN                      | 4017918918804      |
| Pack                     | 50 Pcs.            |
| Customs tariff           | 85366990           |
| Weight/Piece             | 0.00266 KG         |
| Catalog page information | Page 428 (CC-2007) |

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### Dimensions / positions

|                     |        |
|---------------------|--------|
| Pitch               | 5 mm   |
| Dimension a         | 70 mm  |
| Number of positions | 15     |
| Pin dimensions      | 1,3 mm |
| Hole diameter       | 1.5 mm |

#### Technical data

|                                    |                                 |
|------------------------------------|---------------------------------|
| Insulating material group          | IIIa                            |
| Rated surge voltage (III/3)        | 4 kV                            |
| Rated surge voltage (III/2)        | 4 kV                            |
| Rated surge voltage (II/2)         | 4 kV                            |
| Rated voltage (III/2)              | 320 V                           |
| Rated voltage (II/2)               | 400 V                           |
| Connection in acc. with standard   | EN-VDE                          |
| Nominal current $I_N$              | 12 A (depends on the plug used) |
| Nominal voltage $U_N$              | 250 V                           |
| Maximum load current               | 12 A (depends on the plug used) |
| Insulating material                | PA                              |
| Inflammability class acc. to UL 94 | V0                              |

#### Certificates / Approvals



#### CUL


|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 300 V |
| Nominal current $I_N$ | 16 A  |

#### UL


|                       |                         |
|-----------------------|-------------------------|
| Nominal voltage $U_N$ | 300 V                   |
| Nominal current $I_N$ | 16 A                    |
| Certification         | CCA, CUL, GOST, SEV, UL |

## Drawings

### Drilling diagram

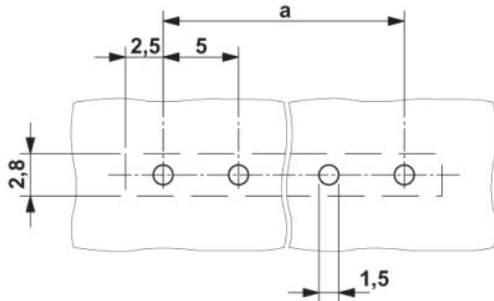

### Dimensioned drawing

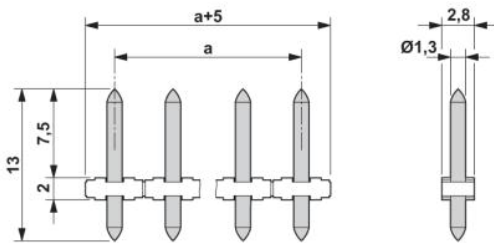

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2008 Phoenix Contact  
Technical modifications reserved;