


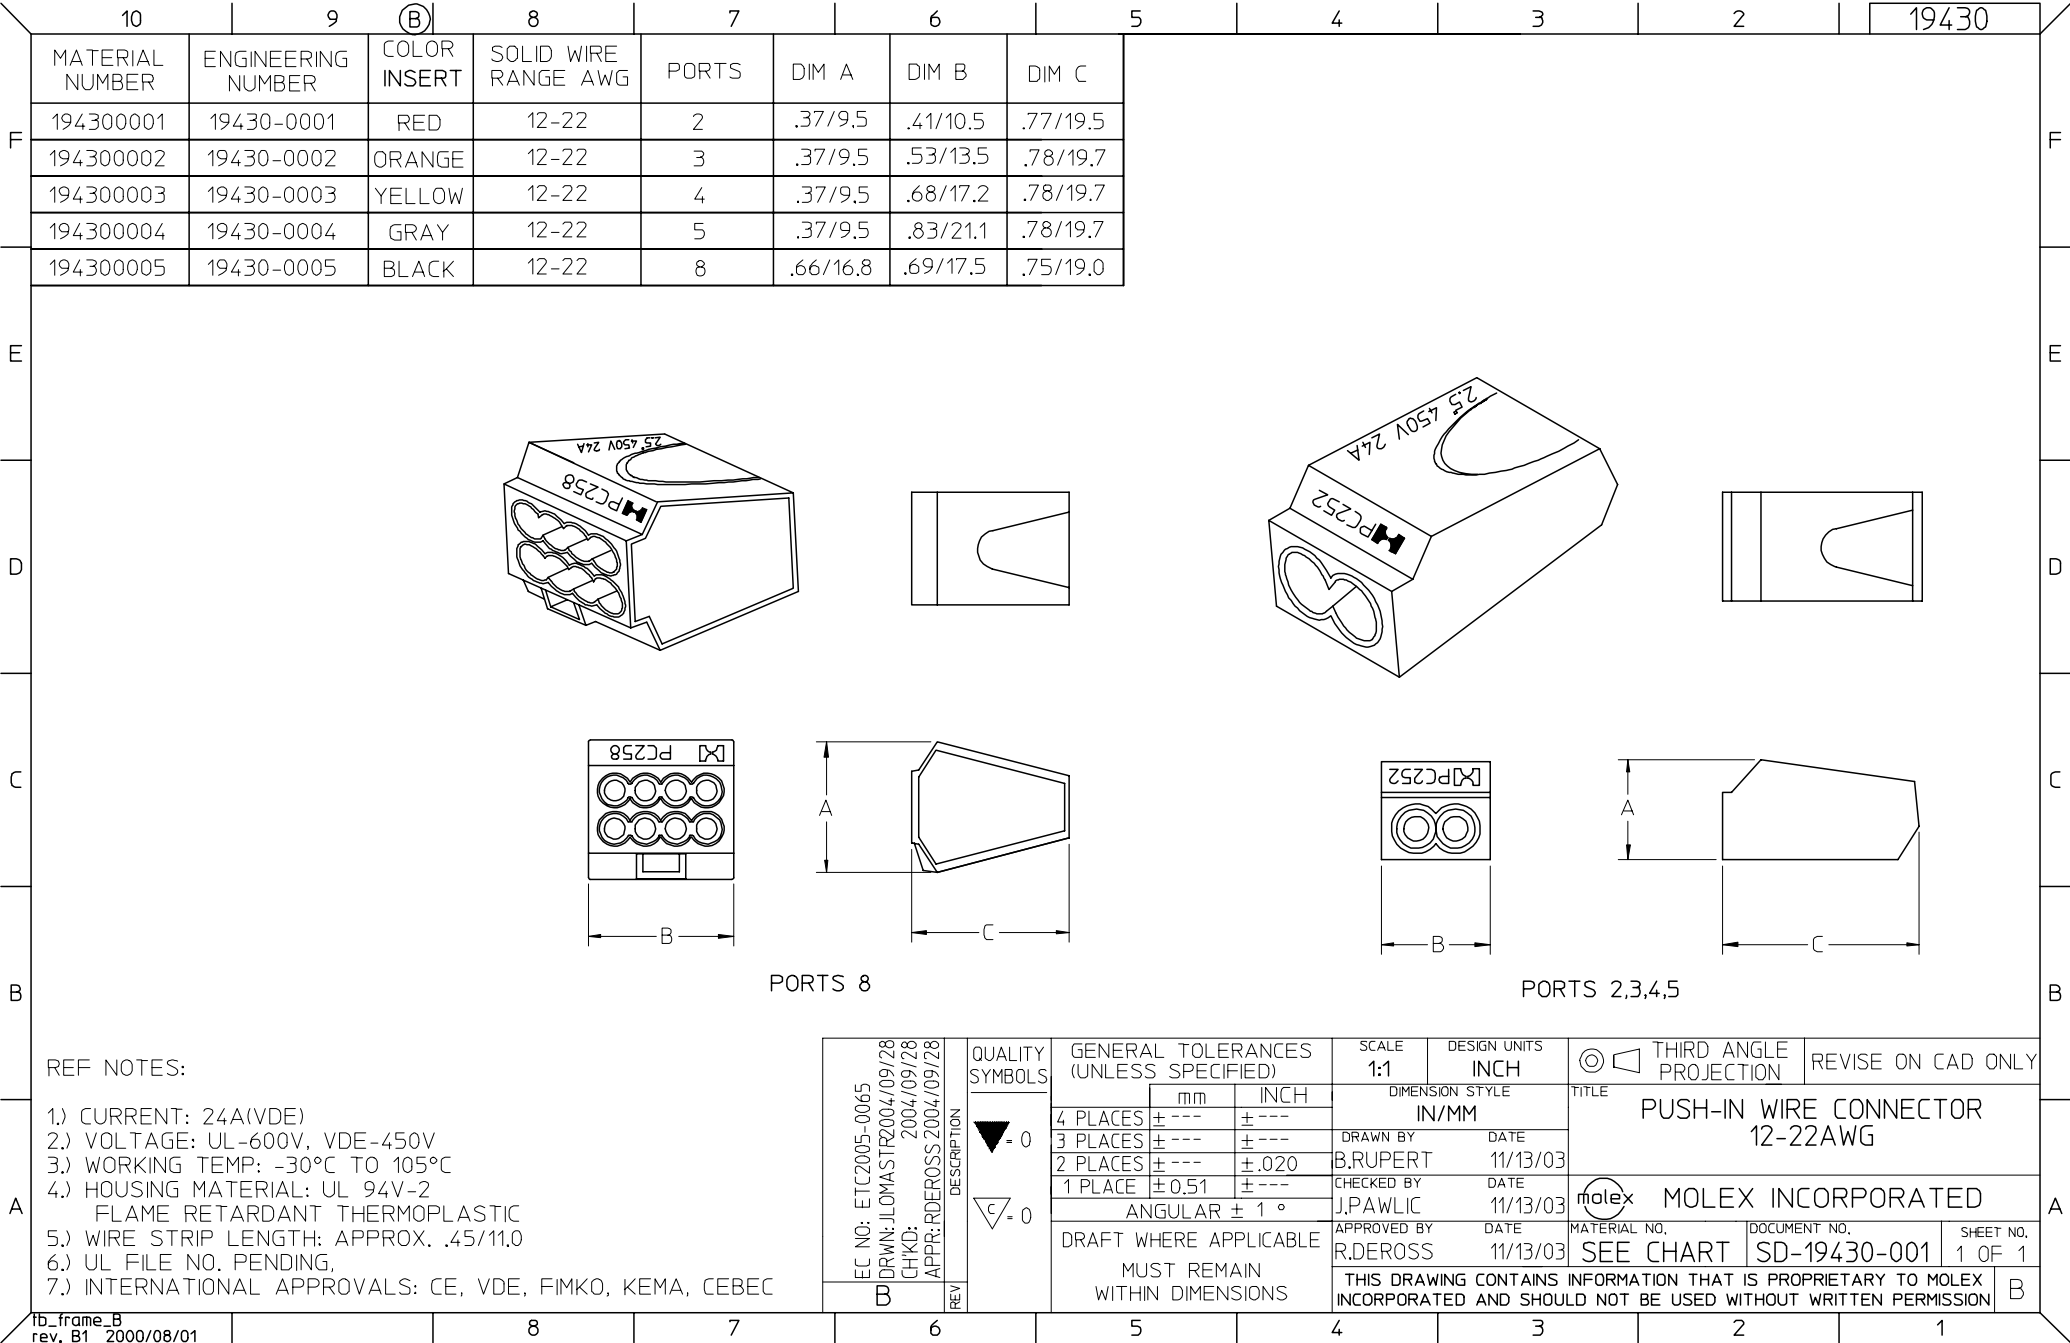

PC252

B

A

C

PORTS 2,3,4,5

REF NOTES:

1.) CURRENT: 24A(VDE)

2.) VOLTAGE: UL-600V, VDE-450V

3.) WORKING TEMP: -30°C TO 105°C

4.) HOUSING MATERIAL: UL 94V-2
FLAME RETARDANT THERMOPLASTIC

5.) WIRE STRIP LENGTH: APPROX. .45/11.0

6.) UL FILE NO. PENDING,

7.) INTERNATIONAL APPROVALS: CE, VDE, FIMKO, KEMA, CEPEC

EC NO: ETC2005-0065

DRWN: JLOMASTR2004/09/28

CHKD: 2004/09/28

APPR: RDEROSS 2004/09/28

QUALITY SYMBOLS

▽ - 0

▽ - 0

DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)

mm

INCH

4 PLACES

± ---

± ---

3 PLACES

± ---

± ---

2 PLACES

± ---

± .020

1 PLACE

± 0.51

± ---

ANGULAR

± 1 °

DRAFT WHERE APPLICABLE

MUST REMAIN WITHIN DIMENSIONS

SCALE 1:1

DESIGN UNITS INCH

DIMENSION STYLE IN/MM

DRAWN BY B.RUPERT

DATE 11/13/03

CHECKED BY J.PAWLIC

DATE 11/13/03

APPROVED BY R.DEROSS

DATE 11/13/03

THIRD ANGLE PROJECTION

REVISE ON CAD ONLY

TITLE PUSH-IN WIRE CONNECTOR 12-22AWG

MOLEX

MOLEX INCORPORATED

MATERIAL NO. SEE CHART

DOCUMENT NO. SD-19430-001

SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

rev. B1 2000/08/01

8

7

6

5

4

3

2

1