
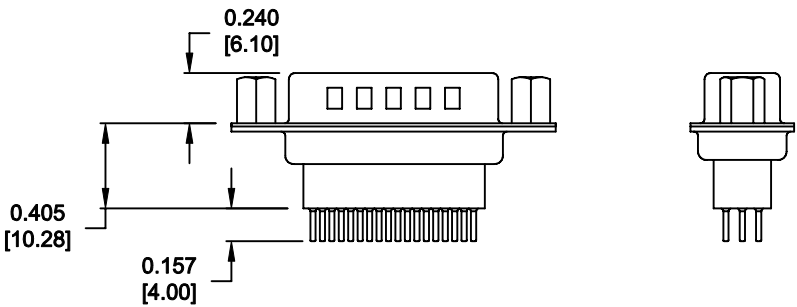


DESCRIPTION: HIGH DENSITY VERTICAL HIGH PROFILE MACHINED

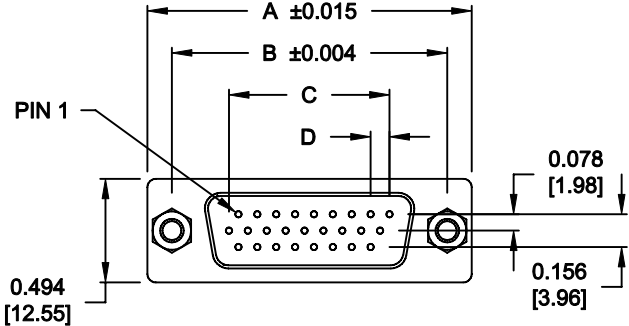

No. OF PINS	DIMENSIONS (IN.)			
	A	B	C	D
15	1.214 [30.84]	0.984 [24.99]	0.405 [10.29]	0.090 [2.29]
26	1.545 [39.24]	1.312 [33.32]	0.765 [19.43]	0.090 [2.29]

MATERIAL:

INSULATOR: PBT, UL94V-0, 230°C PROCESS TEMP.,
CHEMICAL RESISTANCE, COLOR - BLACK
SHELL: STEEL, NICKEL PLATED
CONTACT: BRASS, GOLD FLASH ENTIRE CONTACT

ELECTRICAL:

CURRENT RATING: 2 AMPS
DIELECTRIC WITHSTANDING VOLTAGE: 1,000VAC rms
INSULATION RESISTANCE: 5,000 MegOhms Min.
CONTACT RESISTANCE: 10 MilliOhms Max.
WORKING TEMPERATURE: -55°C TO +125°C

196-YYY-113LYY1


SERIES _____
POSITIONS _____
015 _____
026 _____
GENDER _____
1 = MALE (GROUND INDENTS)
TERMINATION _____
1 = PC MOUNT
SHELL PLATING _____
3 = NICKEL PLATED
RoHS COMPLIANT (LOW TEMP. PROCESS) _____
HARDWARE OPTIONS _____
00 = 0.120" MOUNTING HOLE
03 = 4-40 HEX STANDOFFS
55 = 4-40 INSERTS
PLATING _____
1 = GOLD FLASH

DO NOT SCALE FROM DRAWING


	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS		DATE: 09-15-05		
		CHECKED:		DATE:		
NorComp		SCALE: 1 : 1	SHEET 1		OF 2	REV 2
		DWG NO. 196-YYY-113-LYY1				

RoHS COMPLIANT

DESCRIPTION: HIGH DENSITY DIP SOLDER MALE FOOTPRINT

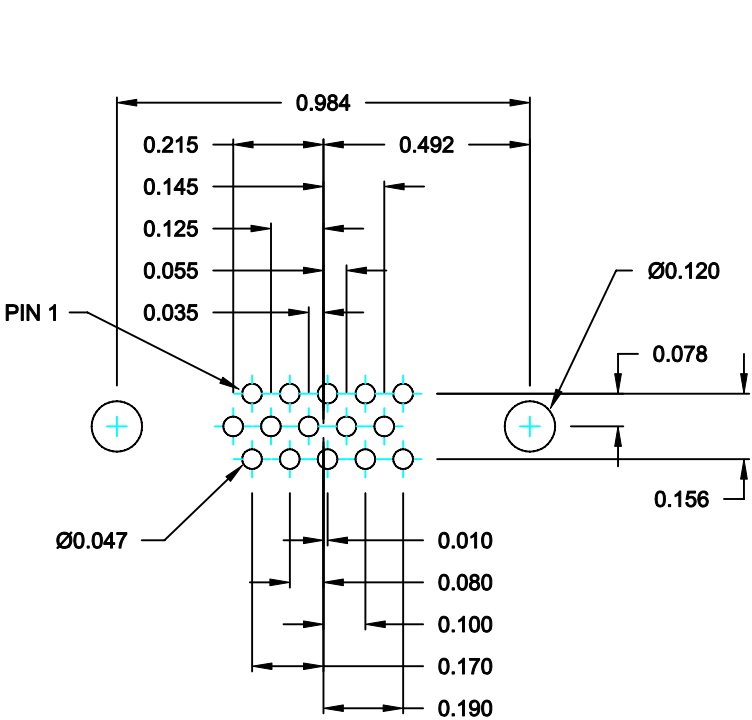

15 POSITION

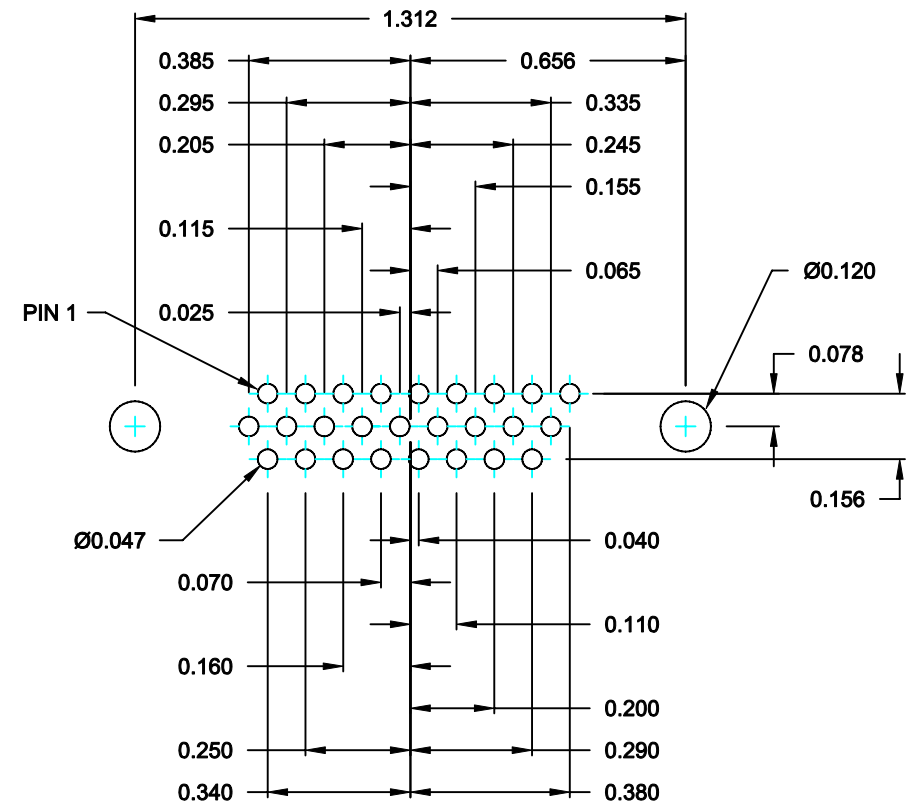

26 POSITION

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS		DATE: 10-29-01			
		CHECKED:		DATE:			
			SCALE: 2 : 1		SHEET 2 OF 2		REV 2
			DWG NO. 196-YYY-113-LYY1				

RoHS COMPLIANT